

Product Reference Guide



INA USA CORPORATION



SHAFT GUIDANCE SYSTEMS

CORPORATE OFFICES

308 SPRINGHILL FARM ROAD
FORT MILL, SC 29715

TELEPHONE (803)548-8500
FAX (803)548-8599

DISTRIBUTOR CUSTOMER SERVICE

TOLL FREE 800-523-6572
FAX (803)548-8594

This product section has been excerpted from our full Product Reference Guide to reduce download time. Our complete Product Reference Guide is available in print and on CD-ROM. To receive the full version, please contact your nearest INA Sales Office listed on the last page of this file.

FOREWORD

This publication was designed to serve as a quick reference to the standard product series offered by INA USA Corporation (INA) for its domestic market. The guide provides a current overview of INA products, including basic envelope dimensions and capacities, in one publication – it is not an engineering design guide intended to replace INA engineering catalogs. Consequently, the metric and inch conversions are listed to 3 decimal places for easy reference and rapid identification of correct replacement part(s), not 4 decimal places as necessary for quality control purposes.

This publication can be used to narrow the choices between the many different INA product lines and series for new designs. Detailed engineering information for new designs can be found in our traditional catalogs or by contacting the INA Engineering Department.

A significant portion of INA sales are special production sizes. The identification of those parts is sometimes difficult since a comprehensive listing is beyond the intent of this publication. Special part numbers take as many different forms as the series listed here, but the basic system is to use sequential numbers for each new design. Usually the prefix is F or FC but can include VH, INA or the bearing type such as NA. INA maintains a technical help desk to identify sizes not known or to match competitors' parts.

The toll free 800 numbers listed will give you access to INA Customer Service representatives. These representatives can tap into INA Worldwide resources to provide the bearings you need.

Storage Life

Lubricants age naturally due to environmental influences. It is therefore the user's responsibility to follow the directions given by the lubricant manufacturer.

The greases used in INA rolling bearings have a mineral oil base and experience shows that they can be stored for up to 3 years without deteriorating providing the following important conditions are met.

- Closed storage room
- Temperature between 0°C and 40°C
- Relative atmospheric humidity 65% or less
- Security from chemical agents (vapors, gases, fluids)
- Sealed rolling bearings

The frictional torque can be considerably higher after longer storage periods than in freshly greased bearings and the lubricity of the grease can also have deteriorated.

INA bearings have many optional features available including:

- ISO series of bearings generally include the standard clearance options CN, C2, C3 and C4.
- ISO bearing series include PN, P6 and P5 precision classes.

- Corrotext™ plating is available for most bearing designs. Corrotext is a patented process for zinc–iron and zinc–iron–cobalt plating in a thin layer which can be applied to standard components. The protection exceeds stainless steel and the cost is half. Add suffix RR.
- All sealed bearings are supplied pregreased. In most cases the standard lubricant is Shell Retinax LX 2 or equivalent. Other greases are available, some at extra cost.
- Unsealed bearings may not be greased when shipped.
- Speed limits as published, are based on oil lubrication for open bearings or grease lubrication for sealed bearings. The speed limits are calculated based on a nominal load and heat balance equation. Higher speeds may be allowed depending on the application.
- Dynamic capacities are published based on INA standard usage of ISO and ABMA formulas. New life theory threshold values are published in other INA publications.
- Life calculations and evaluations can be made from INA engineering based catalogs which are available from your INA Sales Representative.
- Other features are available based on current production volumes including heat stabilization of the rings, matched bearing sets, with oil holes and grooves, etc.

ABMA American Bearing Manufacturers Association

ASTM American Society Of Testing And Materials

DIN Deutsches Institut für Normung e.V.

ISO International Standards Organization

Elges, Andrews and Corrotext are registered trademarks of INA USA Corporation.

Permaglide is a registered trademark and a product of KOLBENSCHMIDT AG, Neckarsulm, also produced in Greensburg, Indiana, USA.

All other products and company names are trademarks or registered trademarks of their respective companies.

ALL RIGHTS RESERVED

INA USA Corporation
308 Springhill Farm Road
Fort Mill, SC 29715

Reproduction of this publication in whole or in part without the express written consent of INA USA Corporation is prohibited.

Although every effort has been made to ensure the accuracy of the information contained in this catalog, INA shall not be liable for any omissions or errors. Purchasers should consult their own testing to determine the suitability of any product for a particular purpose. In no event shall INA be liable for any claims for damages based upon breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

All sales from catalog orders are subject to the Standard Terms and Conditions of Sale. Please contact your INA Sales Representative for a copy of the Standard Terms and Conditions of Sale.

INA USA Corporation reserves the right to make changes / revisions to specifications contained herein without notice.

©Copyright 1999, 2000, 2003 INA USA Corporation



Use of INA Part Numbers & Suffixes

INA has extra options to give you the maximum flexibility in answering customer needs. Cage styles, seal types, internal clearances, and needle sorts are available to help you select the right part for your customers.

UG - Shell type open bearings come standard without grease (Example: SCE87 UG)

AA040 - Shell type sealed bearings come standard with 40% Retinax LX2 (Example: SCE8799 AA040)

0-7 - Radial needle roller & cage assemblies come standard with 0-7 Micron Needle Sorts
(Example: NRA5X49.8G2 0-7, K25X33X24B 0-7)

The table below provides a quick reference regarding our part numbers and integral suffixes. See each part section for part number schematics.


PART / SUFFIX	DEFINITION	EXAMPLE
HK1010, SCE86PP	INA Part Number	SCE87, PASE1-1/2, RA100RR
2RS	2 Lip Seals	62032RS, 3200J2RS
2Z	2 Gap Shields	62032Z, 3300J2Z
J	Steel Cage	52100J, 3200J
KDD, KDDU	2 Gap Shields	LR5208KDD, LR5307KDDU
M	Bronze Cage	930M, 89460M
NPP, NPPU	2 Lip Seals	GRA100NPPB, LR5202NPPU
PP	2 Lip Seals	SCE87PP
RR	2 Land Riding Seals	G1103KRRB, RA100RR
TN	Plastic Cage	81102TN, 87410TN
X	Cylindrical OD for Track Rollers	NATV20PPX, NUTR20X
-	Normal Clearance	6203, 62032RS
C2	C2 Clearance	6302 C2, 63022Z C2
C3	C3 Clearance	6205 C3, 62052RS C3
C4	C4 Clearance	5305J C4, 6210 C4
AA040	40% - Shell Retinax LX2	HK1010 AA040
UG	Ungreased / Corrosion Protected	HK1010 UG
0-7	0-7 Micron - Needle Sort	NRA5X49.8G2 0-7, K25X33X24B 0-7
0-10	0-10 Micron - Needle Sort	AXK6590 0-10




Self-Aligning Linear Ball Bearings

KX, KX..PP, KXO, KXO..PP SERIES

- MAX³ Maximum Performance
- Closed and open
- With gap seal or contact seal on both sides




KX, KX..PP

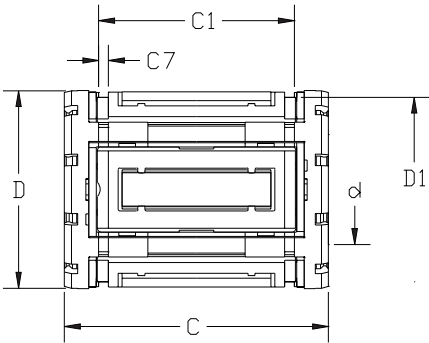

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.




DIMENSION TABLE • Inch Dimensions					
SHAFT DIAMETER	PART NUMBER ¹⁾	WEIGHT lbs	DIMENSIONS		
			d	D	C
1/2	KX 08	0.0430	0.500 _{-0.005}	0.875	1.250 _{-0.020}
	KXO 08	0.0317	0.500 _{-0.005}	0.875	1.250 _{-0.020}
5/8	KX 10	0.0875	0.625 _{-0.005}	1.125	1.500 _{-0.020}
	KXO 10	0.0719	0.625 _{-0.005}	1.125	1.500 _{-0.020}
3/4	KX 12	0.1155	0.750 _{-0.005}	1.250	1.625 _{-0.020}
	KXO 12	0.0948	0.750 _{-0.005}	1.250	1.625 _{-0.020}
1	KX 16	0.2425	1.000 _{-0.005}	1.563	2.250 _{-0.020}
	KXO 16	0.1962	1.000 _{-0.005}	1.563	2.250 _{-0.020}
1 1/4	KX 20	0.4861	1.250 _{-0.006}	2.000	2.625 _{-0.025}
	KXO 20	0.3933	1.250 _{-0.006}	2.000	2.625 _{-0.025}
1 1/2	KX 24	0.7749	1.500 _{-0.006}	2.375	3.000 _{-0.030}
	KXO 24	0.6283	1.500 _{-0.006}	2.375	3.000 _{-0.030}
2	KX 32	1.5139	2.000 _{-0.008}	3.000	4.000 _{-0.040}
	KXO 32	1.2269	2.000 _{-0.008}	3.000	4.000 _{-0.040}

1) Linear ball bearings sealed on both sides: suffix "PP".
2) Load ratings apply only for hardened (670 to 840 HV) and ground shaft raceways.
3) Load rating in main load direction.
4) Load ratings to ISO/C 14 728-1 (maximum values).

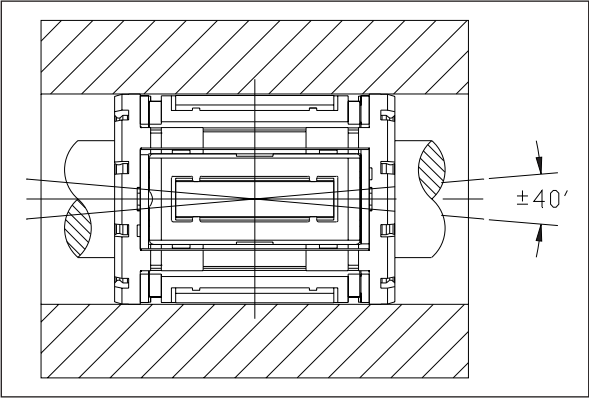


Misalignment compensation ±40'



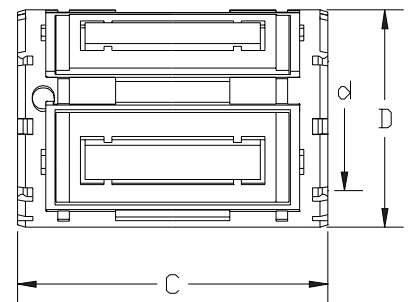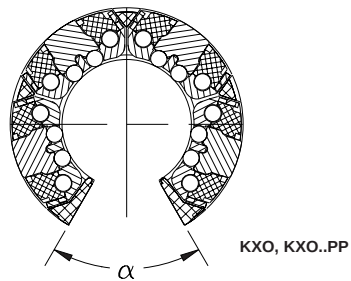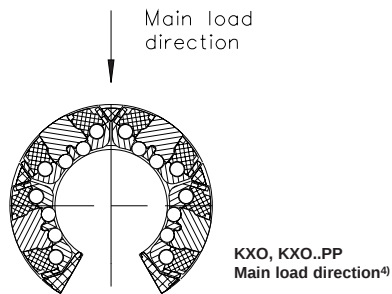

DIMENSION TABLE • Inch Dimensions											
MOUNTING DIMENSION							NUMBER OF BALL ROWS	LOAD RATINGS ²⁾⁴⁾		ACCESSORIES	SHAFT DIAMETER
D ₁	C ₇	C ₁	α deg.	d ₁	t	S		DYN. C ₀ lbf	STAT. C ₀ lbf	SUITABLE SNAP RINGS TO N1400	
0.821	0.046	1.032 _{-0.020}	-	-	-	-	6	275	200	1/2 x .035	1/2
-	-	1.032 _{-0.020}	60	0.136	-	0.625	4	260 ³⁾	190 ³⁾	1/2 x .035	5/8
1.059	0.056	1.112 _{-0.020}	-	-	-	-	10	290	260	5/8 x .035	
-	-	1.112 _{-0.020}	60	0.105	0.039	0.125	8	290 ³⁾	260 ³⁾	5/8 x .035	
1.176	0.056	1.272 _{-0.020}	-	-	-	-	10	430	370	3/4 x .042	3/4
-	-	1.272 _{-0.020}	60	0.136	0.059	0.125	8	430 ³⁾	370 ³⁾	3/4 x .042	1
1.469	0.068	1.886 _{-0.020}	-	-	-	-	10	810	720	1 x .042	
-	-	1.886 _{-0.020}	64	0.136	0.047	0.125	8	810 ³⁾	720 ³⁾	1 x .042	
1.886	0.068	2.011 _{-0.025}	-	-	-	-	10	1490	1190	1 1/4 x .050	1 1/4
-	-	2.011 _{-0.025}	64	0.201	0.090	0.188	8	1490 ³⁾	1190 ³⁾	1 1/4 x .050	1 1/2
2.239	0.086	2.422 _{-0.030}	-	-	-	-	10	2090	1550	1 1/2 x .050	
-	-	2.422 _{-0.030}	64	0.201	0.090	0.188	8	2090 ³⁾	1550 ³⁾	1 1/2 x .050	
2.838	0.103	3.206 _{-0.040}	-	-	-	-	10	3500	2750	2 x .062	2
-	-	3.206 _{-0.040}	60	0.265	0.090	0.312	8	3500 ³⁾	2750 ³⁾	2 x .062	

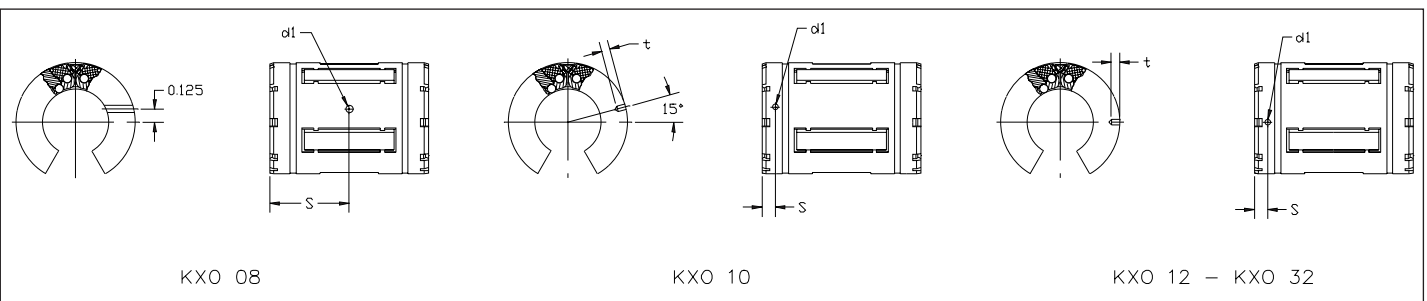


Location holes

Self-Aligning Mounted Units

KGX, KGX..PP, KGXO, KGXO..PP SERIES

- MAX³ Maximum Performance
- Closed and open
- Linear ball bearing with gap seal or contact seal on both sides

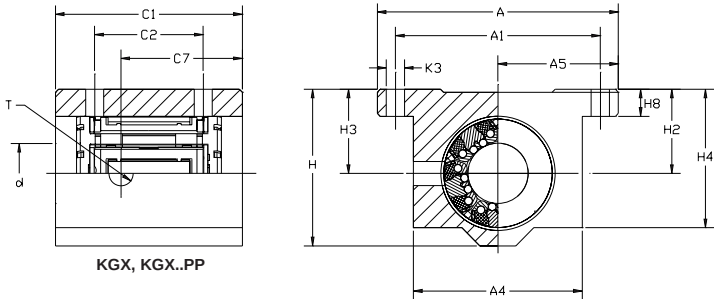


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.


DIMENSION TABLE • Inch Dimensions										
SHAFT DIAMETER	PART NUMBER ¹⁾	WEIGHT lbs	d	DIMENSIONS			MOUNTING DIMENSIONS			
				A	C ₁	H	A ₄	A ₅ ±0.001	A ₆	A ₇
1/2	KGX 08	0.249	0.500	2.000	1.688	1.250	1.375	1.000	-	-
	KGXO 08	0.216	0.500	2.000	1.500	1.100	-	1.000	0.688	0.905
5/8	KGX 10	0.464	0.625	2.500	1.938	1.625	1.750	1.250	-	-
	KGXO 10	0.395	0.625	2.500	1.750	1.375	-	1.250	0.875	1.095
3/4	KGX 12	0.581	0.750	2.750	2.063	1.750	1.875	1.375	-	-
	KGXO 12	0.495	0.750	2.750	1.875	1.535	-	1.375	0.937	1.161
1	KGX 16	1.213	1.000	3.250	2.813	2.188	2.375	1.625	-	-
	KGXO 16	1.053	1.000	3.250	2.625	1.975	-	1.625	1.188	1.457
1 1/4	KGX 20	2.430	1.250	4.000	3.625	2.813	3.000	2.000	-	-
	KGXO 20	2.104	1.250	4.000	3.375	2.458	-	2.000	1.500	1.831
1 1/2	KGX 24	3.573	1.500	4.750	4.000	3.250	3.500	2.375	-	-
	KGXO 24	3.154	1.500	4.750	3.750	2.910	-	2.375	1.750	2.087
2	KGX 32	7.196	2.000	6.000	5.000	4.063	4.500	3.000	-	-
	KGXO 32	6.306	2.000	6.000	4.750	3.660	-	3.000	2.250	2.638

1) Linear ball bearings sealed on both sides: suffix "PP".
 2) Load ratings apply only for hardened (670 to 840 HV) and ground shaft raceways.
 3) Load rating in main load direction.
 4) Load ratings to ISO/C 14 728-1 (maximum values).



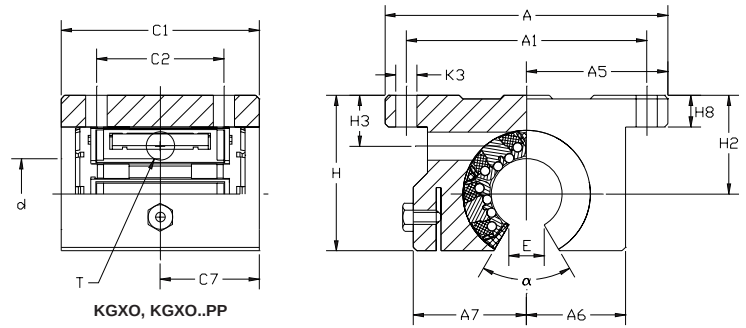

DIMENSION TABLE • Inch Dimensions													
MOUNTING DIMENSIONS											LOAD RATINGS ²⁾⁴⁾		SHAFT DIAMETER
C ₇	H ₂ ±0.001	H ₃	H ₄	H ₈	T	E	α deg.	A ₁ ±0.01	C ₂ ±0.01	K ₃	dyn. C lbf	stat. C ₀ lbf	
0.844	0.687	0.690	1.125	0.250	NIP A1	-	-	1.688	1.000	0.156	275	200	1/2
0.520	0.687	0.370	-	0.250	NIP A1	0.313	60	1.688	1.000	0.156	260 ³⁾	190 ³⁾	
1.260	0.875	0.700	1.437	0.281	1/4-28	-	-	2.125	1.125	0.188	290	260	5/8
0.875	0.875	0.450	-	0.281	1/4-28	0.375	60	2.125	1.130	0.188	290 ³⁾	260 ³⁾	
1.340	0.937	0.937	1.563	0.313	1/4-28	-	-	2.375	1.250	0.188	430	370	3/4
0.937	0.937	0.510	-	0.313	1/4-28	0.438	60	2.375	1.250	0.188	430 ³⁾	370 ³⁾	
1.950	1.187	1.187	1.938	0.375	1/4-28	-	-	2.875	1.750	0.218	810	720	1
1.312	1.187	0.730	-	0.375	1/4-28	0.563	60	2.875	1.750	0.218	810 ³⁾	720 ³⁾	
2.430	1.500	1.500	2.500	0.437	1/4-28	-	-	3.500	2.000	0.218	1490	1190	1 1/4
1.688	1.500	0.800	-	0.437	1/4-28	0.625	60	3.500	2.000	0.218	1490 ³⁾	1190 ³⁾	
2.750	1.750	1.750	2.875	0.500	1/4-28	-	-	4.125	2.500	0.281	2090	1550	1 1/2
1.875	1.750	0.840	-	0.500	1/4-28	0.750	60	4.125	2.500	0.281	2090 ³⁾	1550 ³⁾	
3.420	2.125	2.125	3.625	0.625	1/4-28	-	-	5.250	3.250	0.406	3500	2750	2
2.375	2.125	1.100	-	0.625	1/4-28	1.000	60	5.250	3.250	0.406	3500 ³⁾	2750 ³⁾	

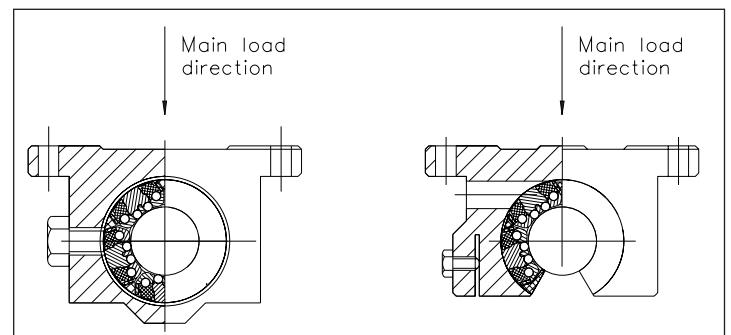


KGX, KGX..PP, KGXO, KGXO..PP
Main load direction⁴⁾

Self-Aligning Tandem Mounted Units

KTX, KTX..PP, KTXO, KTXO..PP SERIES

- MAX³ Maximum Performance
- Closed and open
- Linear ball bearing with gap seal or contact seal on both sides

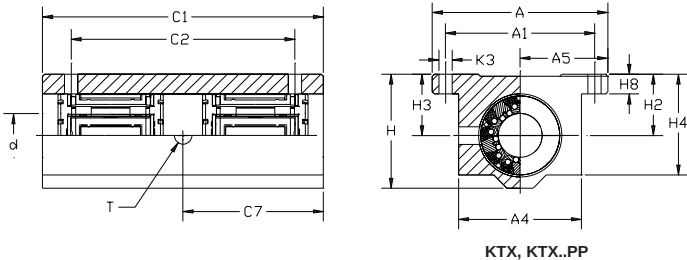


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.


DIMENSION TABLE • Inch Dimensions										
SHAFT DIAMETER	PART NUMBER ¹⁾	WEIGHT lbs	d	DIMENSIONS			MOUNTING DIMENSIONS			
				A	C ₁	H	A ₄	A ₅ ±0.001	A ₆	A ₇
1/2	KTX 08	0.443	0.500	2.000	3.50	1.250	1.375	1.000	-	-
	KTXO 08	0.369	0.500	2.000	3.50	1.100	-	1.000	0.688	0.905
5/8	KTX 10	1.065	0.625	2.500	4.00	1.625	1.750	1.250	-	-
	KTXO 10	0.887	0.625	2.500	4.00	1.375	-	1.250	0.875	1.095
3/4	KTX 12	1.253	0.750	2.750	4.50	1.750	1.875	1.375	-	-
	KTXO 12	1.071	0.750	2.750	4.50	1.535	-	1.375	0.937	1.161
1	KTX 16	2.597	1.000	3.250	6.00	2.188	2.375	1.625	-	-
	KTXO 16	2.228	1.000	3.250	6.00	1.975	-	1.625	1.188	1.457
1 1/4	KTX 20	5.529	1.250	4.000	7.50	2.813	3.000	2.000	-	-
	KTXO 20	4.774	1.250	4.000	7.50	2.485	-	2.000	1.500	1.831
1 1/2	KTX 24	8.316	1.500	4.750	9.00	3.250	3.500	2.375	-	-
	KTXO 24	7.378	1.500	4.750	9.00	2.910	-	2.375	1.750	2.087

1) Linear ball bearings sealed on both sides: suffix "PP".
 2) Load ratings apply only for hardened (670 to 840 HV) and ground shaft raceways.
 3) Load rating in main load direction.
 4) Load ratings to ISO/C 14 728-1 (maximum values).



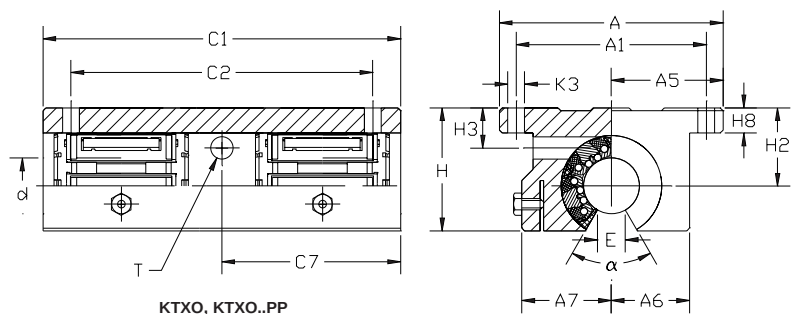

DIMENSION TABLE • Inch Dimensions													
MOUNTING DIMENSIONS											LOAD RATINGS ²⁾⁴⁾		SHAFT DIAMETER
C ₇	H ₂ ±0.001	H ₃	H ₄	H ₈	T	E	α deg.	A ₁ ±0.01	C ₂ ±0.01	K ₃	dyn. C lbf	stat. C lbf	
1.750	0.687	0.687	1.125	0.250	NIP A1	-	-	1.688	2.500	0.156	550	400	1/2
1.750	0.687	0.370	-	0.250	NIP A1	0.313	60	1.688	2.500	0.156	520 ³⁾	380 ³⁾	
2.000	0.875	0.875	1.437	0.281	1/4-28	-	-	2.125	3.000	0.188	580	520	5/8
2.000	0.875	0.450	-	0.281	1/4-28	0.375	60	2.125	3.000	0.188	580 ³⁾	520 ³⁾	
2.250	0.937	0.937	1.563	0.313	1/4-28	-	-	2.375	3.500	0.188	860	740	3/4
2.250	0.937	0.510	-	0.313	1/4-28	0.438	60	2.375	3.500	0.188	860 ³⁾	740 ³⁾	
3.000	1.187	1.187	1.938	0.375	1/4-28	-	-	2.875	4.500	0.218	1620	1440	1
3.000	1.187	0.730	-	0.375	1/4-28	0.563	60	2.875	4.500	0.218	1620 ³⁾	1440 ³⁾	
3.750	1.500	1.500	2.500	0.437	1/4-28	-	-	3.500	5.500	0.218	3000	2380	1 1/4
3.750	1.500	0.800	-	0.437	1/4-28	0.625	60	3.500	5.500	0.218	3000 ³⁾	2380 ³⁾	
4.500	1.750	1.750	2.875	0.500	1/4-28	-	-	4.125	6.500	0.281	4200	3100	1 1/2
4.500	1.750	0.800	-	0.500	1/4-28	0.750	60	4.125	6.500	0.281	4200 ³⁾	3100 ³⁾	

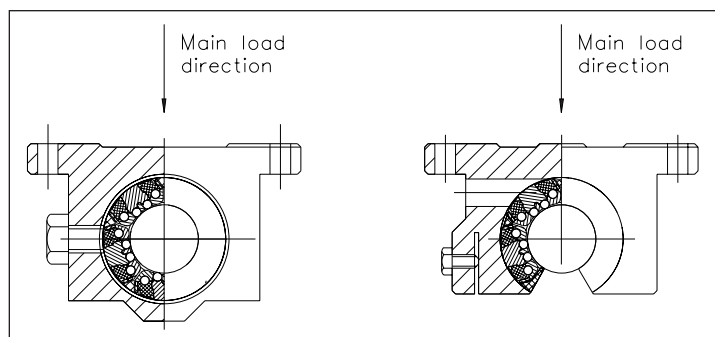


KTX, KTX..PP, KTXO, KTXO..PP
Main load direction⁴⁾

Self-Aligning Linear Ball Bearings

KS, KS..PP, KSO, KSO..PP SERIES


- MAX³ Maximum Performance
- Light range - metric sizes
- Closed and open designs
- Gap seals or contact seals on both sides

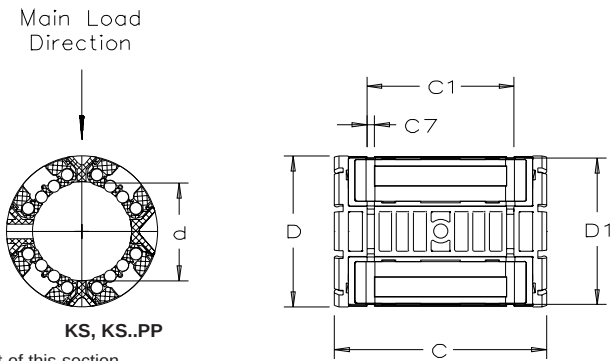

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.




DIMENSION TABLE • Dimensions in mm							
SHAFT DIAMETER	PART NUMBER ¹⁾	MASS ≈kg	DIMENSIONS			MOUNTING DIMENSIONS	
			d	D	C	A _e ²⁾	C ₁ H13
12	KS 12	0.018	12	22	32	-	22.6
	KSO 12	0.013	12	22	32	7.6	-
16	KS 16	0.028	16	26	36	-	24.6
	KSO 16	0.019	16	26	36	10.1	-
20	KS 20	0.051	20	32	45	-	31.2
	KSO 20	0.038	20	32	45	10	-
25	KS 25	0.102	25	40	58	-	43.7
	KSO 25	0.075	25	40	58	12.5	-
30	KS 30	0.172	30	47	68	-	51.7
	KSO 30	0.135	30	47	68	14.3	-
40	KS 40	0.335	40	62	80	-	60.3
	KSO 40	0.259	40	62	80	18.2	-
50	KS 50	0.589	50	75	100	-	77.3
	KSO 50	0.454	50	75	100	22.7	-

1) Linear ball bearings sealed on both sides: suffix "PP".
 2) Dimension A_e on diameter d.
 3) Hole arrangement symmetrical with bearing width C.
 4) The basic load ratings apply only for hardened (670 to 840 HV) and ground shaft raceways.
 Basic load ratings in accordance with DIN 636-1.
 5) Basic load rating in main load direction.

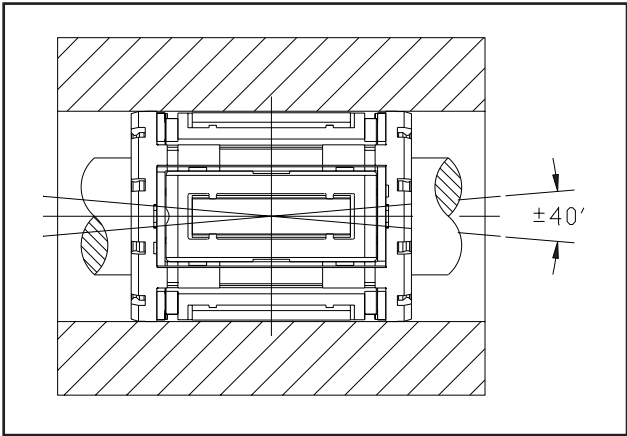


Compensation of misalignment ±40'




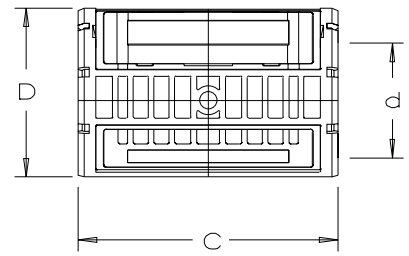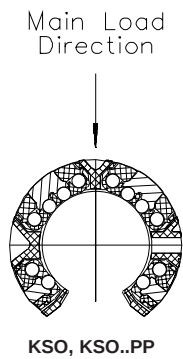


DIMENSION TABLE • Dimensions in mm										
MOUNTING DIMENSIONS						BALL ROWS	BASIC LOAD RATINGS 4)5)		ACCESSORIES	
C_7	D_1	H_{10}	$K_1^{3)}$	$K_4^{3)}$	α DEGREES	QUANTITY	dyn. C_{max} N	stat. C_{0max} N	SUITABLE SNAP RING TO DIN 471	SHAFT DIAMETER d
1.3	21	-	3	-	-	8	900	810	22x1.2	12
-	-	-	3	3	78	6	900	810	-	16
1.3	25	-	3	-	-	8	1,430	1,160	27x1.2	
-	-	-	3	3	78	6	1,430	1,160	-	20
1.6	30.7	-	3	-	-	8	2,200	1,730	33x1.5	
-	-	-	3	3	60	6	2,200	1,730	-	25
1.85	38	-	3.5	-	-	8	3,950	3,250	42x1.75	
-	-	1.5	3.5	3	60	6	3,950	3,250	-	30
1.85	44.7	-	3.5	-	-	8	5,900	4,500	48x1.75	
-	-	2	3.5	3	57	6	5,900	4,500	-	40
2.15	59.4	-	3.5	-	-	8	10,200	7,200	63x2	
-	-	1.5	3.5	3	54	6	10,200	7,200	-	50
2.65	71.4	-	4.5	-	-	8	15,100	10,400	75x2.5	
-	-	2.5	4.5	5	54	6	15,100	10,400	-	




KS 12
KSO 12



KS 16,20
KSO 16,20



KS 25
KSO 25





KS 30,40,50
KSO 30,40,50

Fixing holes

Linear Ball Bearings

KGSG..PP, KGSS..PP, KGSO..PP SERIES

- MAX³ Maximum Performance
- Closed and open designs
- Contact seals on both sides

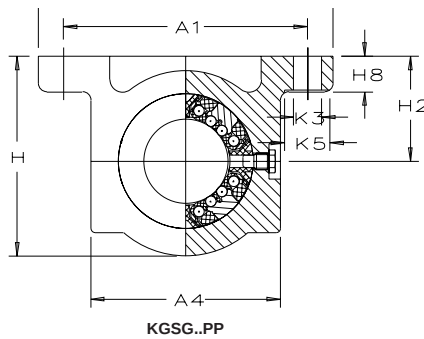

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm									
SHAFT DIAMETER d	PART NUMBER	MASS ≈kg	DIMENSIONS				MOUNTING DIMENSIONS		
			d	A	C	H	A ₁ ±0.15	A ₄	A ₆ ¹⁾
12	KGSG 12 PP	0.08	12	52	32	35.8	42	31.6	-
	KGSS 12 PP	0.08	12	52	32	35.8	42	31.6	-
	KGSO 12 PP	0.07	12	52	32	-	42	31.6	7.6
16	KGSG 16 PP	0.13	16	56	36	37.5	46	35	-
	KGSS 16 PP	0.13	16	56	36	37.5	46	35	-
	KGSO 16 PP	0.12	16	56	36	-	46	35	10.1
20	KGSG 20 PP	0.27	20	70	45	47.5	58	45	-
	KGSS 20 PP	0.27	20	70	45	47.5	58	45	-
	KGSO 20 PP	0.23	20	70	45	-	58	45	10
25	KGSG 25 PP	0.51	25	80	58	57.5	68	55	-
	KGSS 25 PP	0.51	25	80	58	57.5	68	55	-
	KGSO 25 PP	0.44	25	80	58	-	68	55	12.5
30	KGSG 30 PP	0.83	30	88	68	66.5	76	63	-
	KGSS 30 PP	0.83	30	88	68	66.5	76	63	-
	KGSO 30 PP	0.73	30	88	68	-	76	63	13.6
40	KGSG 40 PP	1.21	40	108	80	83.5	94	77	-
	KGSS 40 PP	1.21	40	108	80	83.5	94	77	-
	KGSO 40 PP	1.05	40	108	80	-	94	77	18.2
50	KGSG 50 PP	2.53	50	135	100	98	116	96	-
	KGSS 50 PP	2.53	50	135	100	98	116	96	-
	KGSO 50 PP	1.98	50	135	100	-	116	96	22.7


¹⁾ Dimensions A₆ on diameter d.

²⁾ For fixing screws to EN ISO 4762-8.8.

If there is a possibility of settling, the fixing screws should be secured against rotation.

³⁾ The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.

Basic load ratings in accordance with DIN 636-1.

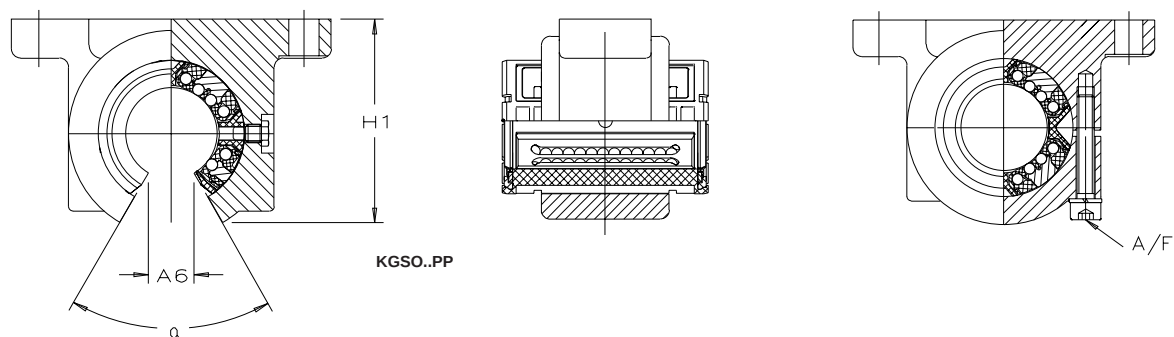


DIMENSION TABLE • Dimensions in mm													
MOUNTING DIMENSIONS										BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER
C ₁	C ₃	D	H ₁	H ₂ ±0.015	H ₈	K ₃ ²⁾	K ₅ ²⁾	α Degrees	A/F		dyn. C _{max} N	stat. C _{0max} N	
20	12	22	-	20	6	5.5	10	-	-	8	900	810	12
20	12	22	-	20	6	5.5	10	-	2	8	900	810	
20	12	22	32.3	20	6	5.5	10	78	-	6	900	810	
22	15	26	-	20	6	5.5	10	-	-	8	1,430	1,160	16
22	15	26	-	20	6	5.5	10	-	2	8	1,430	1,160	
22	15	26	33.6	20	6	5.5	10	78	-	6	1,430	1,160	
28	20	32	-	25	8	6.6	11	-	-	8	2,200	1,730	20
28	20	32	-	25	8	6.6	11	-	3	8	2,200	1,730	
28	20	32	44.5	25	8	6.6	11	60	-	6	2,200	1,730	
40	28	40	-	30	10	6.6	11	-	-	8	3,950	3,250	25
40	28	40	-	30	10	6.6	11	-	3	8	3,950	3,250	
40	28	40	53.8	30	10	6.6	11	60	-	6	3,950	3,250	
48	32	47	-	35	10	6.6	11	-	-	8	5,900	4,500	30
48	32	47	-	35	10	6.6	11	-	4	8	5,900	4,500	
48	32	47	63.1	35	10	6.6	11	54	-	6	5,900	4,500	
56	40	62	-	45	12	9	15	-	-	8	10,200	7,200	40
56	40	62	-	45	12	9	15	-	4	8	10,200	7,200	
56	40	62	79.3	45	12	9	15	54	-	6	10,200	7,200	
72	52	75	-	50	14	11	18	-	-	8	15,100	10,400	50
72	52	75	-	50	14	11	18	-	5	8	15,100	10,400	
72	52	75	92.8	50	14	11	18	54	-	6	15,100	10,400	


Linear Ball Bearing Units

KGSAG..PP, KGSAS..PP, KGSAG..PP SERIES

- MAX³ Maximum Performance
- Closed and open designs
- Contact seals on both sides



KGSAG..PP



For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm

SHAFT DIAMETER	PART NUMBER	MASS ≈kg	DIMENSIONS				MOUNTING DIMENSIONS		
			d	A	C	H	A ₁ ±0.15	A ₅	A ₅ ¹⁾
12	KGSAG 12 PP	0.06	12	42	32	34	32	21	-
	KGSAS 12 PP	0.06	12	42	32	34	32	21	-
	KGSAG 12 PP	0.05	12	42	32	-	32	21	7.6
16	KGSAG 16 PP	0.11	16	50	36	41	40	25	-
	KGSAS 16 PP	0.11	16	50	36	41	40	25	-
	KGSAG 16 PP	0.1	16	50	36	-	40	25	10.1
20	KGSAG 20 PP	0.17	20	60	45	47.5	45	30	-
	KGSAS 20 PP	0.17	20	60	45	47.5	45	30	-
	KGSAG 20 PP	0.15	20	60	45	-	45	30	10
25	KGSAG 25 PP	0.34	25	74	58	60	60	37	-
	KGSAS 25 PP	0.34	25	74	58	60	60	37	-
	KGSAG 25 PP	0.3	25	74	58	-	60	37	12.5
30	KGSAG 30 PP	0.54	30	84	68	67	68	42	-
	KGSAS 30 PP	0.54	30	84	68	67	68	42	-
	KGSAG 30 PP	0.48	30	84	68	-	68	42	13.6
40	KGSAG 40 PP	0.98	40	108	80	87	86	54	-
	KGSAS 40 PP	0.98	40	108	80	87	86	54	-
	KGSAG 40 PP	0.84	40	108	80	-	86	54	18.2
50	KGSAG 50 PP	1.63	50	130	100	98	108	65	-
	KGSAS 50 PP	1.63	50	130	100	98	108	65	-
	KGSAG 50 PP	1.17	50	130	100	-	108	65	22.7


¹⁾ Dimensions A₅ on diameter d.

²⁾ For fixing screws to EN ISO 4762-8.8.



If there is a possibility of settling, the fixing screws should be secured against rotation.

³⁾ The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.

Basic load ratings in accordance with DIN 636-1.



KGS AO..PP



KGS AS..PP

A/F


DIMENSION TABLE • Dimensions in mm

MOUNTING DIMENSIONS											BALL ROWS	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER
C ₁	C ₂ ±0.015	C ₃	D h5	H ₁	H ₂ ±0.01	H ₈ -0.5	K ₃ ²⁾	K ₅ ²⁾	α Degrees	A/F		dyn. C _{max} N	stat. C _{0max} N	
32	23	20	22	-	18	4.8	4.7	8	-	-	8	900	810	12
32	23	20	22	-	18	4.8	4.7	8	-	7	8	900	810	
32	23	20	22	30.4	18	4.8	4.7	8	78	-	6	900	810	
35	26	22	26	-	22	5.4	4.7	8	-	-	8	1,430	1,160	16
35	26	22	26	-	22	5.4	4.7	8	-	7	8	1,430	1,160	
35	26	22	26	36.8	22	5.4	4.7	8	78	-	6	1,430	1,160	
42	32	28	32	-	25	6.7	4.7	8	-	-	8	2,200	1,730	20
42	32	28	32	-	25	6.7	4.7	8	-	7	8	2,200	1,730	
42	32	28	32	44.5	25	6.7	4.7	8	60	-	6	2,200	1,730	
54	40	40	40	-	30	7.8	5.7	10	-	-	8	3,950	3,250	25
54	40	40	40	-	30	7.8	5.7	10	-	8	8	3,950	3,250	
54	40	40	40	56	30	7.8	5.7	10	60	-	6	3,950	3,250	
60	45	48	47	-	35	8.7	6.8	11	-	-	8	5,900	4,500	30
60	45	48	47	-	35	8.7	6.8	11	-	10	8	5,900	4,500	
60	45	48	47	63.5	35	8.7	6.8	11	54	-	6	5,900	4,500	
78	58	56	62	-	45	11	9.2	15	-	-	8	10,200	7,200	40
78	58	56	62	-	45	11	9.2	15	-	13	8	10,200	7,200	
78	58	56	62	82.4	45	11	9.2	15	54	-	6	10,200	7,200	
70	50	72	75	-	50	12.5	9.2	15	-	-	8	15,100	10,400	50
70	50	72	75	-	50	12.5	9.2	15	-	13	8	15,100	10,400	
70	50	72	75	92.8	50	12.5	9.2	15	54	-	6	15,100	10,400	

Linear Ball Bearing Units

KGSNG..PP AS, KGSNS..PP AS SERIES

- MAX³ Maximum Performance
- Light range - metric sizes
- Sealed, greased with relubrication facility

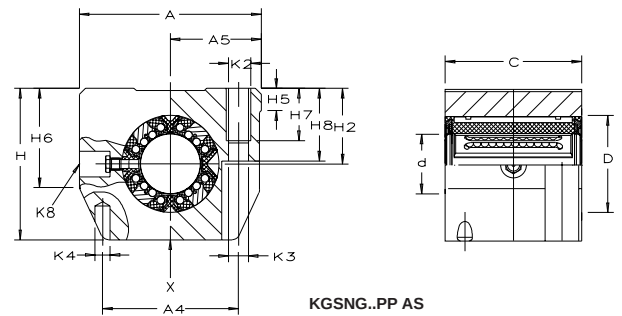

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm											
SHAFT DIAMETER	PART NUMBER	MASS ≈kg	DIMENSIONS				MOUNTING DIMENSIONS				
			d	A	C	H	A ₁ ±0.15	A ₄	A ₅ ±0.01	C ₂ ¹⁾ ±0.15	D
12	KGSNG 12 PP AS	0.1	12	43	32	35	32	34	21.5	23	22
	KGSNS 12 PP AS	0.1	12	43	32	35	32	34	21.5	23	22
16	KGSNG 16 PP AS	0.17	16	53	37	42	40	40	26.5	26	26
	KGSNS 16 PP AS	0.17	16	53	37	42	40	40	26.5	26	26
20	KGSNG 20 PP AS	0.27	20	60	45	50	45	44	30	32	32
	KGSNS 20 PP AS	0.27	20	60	45	50	45	44	30	32	32
25	KGSNG 25 PP AS	0.56	25	78	58	60	60	59.4	39	40	40
	KGSNS 25 PP AS	0.56	25	78	58	60	60	59.4	39	40	40
30	KGSNG 30 PP AS	0.83	30	87	68	70	68	63	43.5	45	47
	KGSNS 30 PP AS	0.83	30	87	68	70	68	63	43.5	45	47
40	KGSNG 40 PP AS	1.55	40	108	80	90	86	76	54	58	62
	KGSNS 40 PP AS	1.55	40	108	80	90	86	76	54	58	62
50	KGSNG 50 PP AS	2.7	50	132	100	105	108	90	66	50	75
	KGSNS 50 PP AS	2.7	50	132	100	105	108	90	66	50	75


¹⁾ Dimension C₂ and lubrication hole symmetrical with bearing width C.

²⁾ For fixing screws to EN ISO 4762-8.8.

If there is a possibility of settling, the fixing screws should be secured against rotation.

³⁾ Centring for dowel hole.

⁴⁾ The basic load ratings apply only to hardened (670 to 840

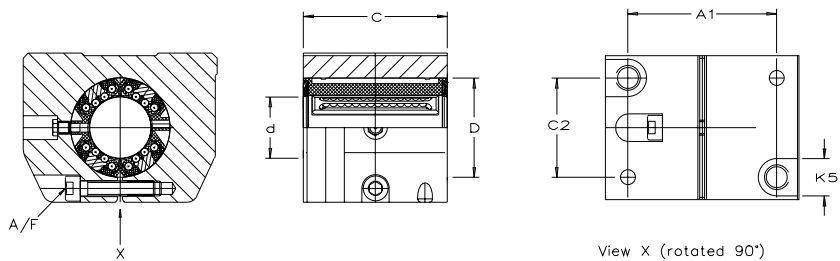


DIMENSION TABLE • Dimensions in mm														
MOUNTING DIMENSIONS											BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER d
H ₂ +0.008 -0.016	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ²⁾	K ₄ ³⁾	K ₅ ²⁾	K ₈ ¹⁾	A/F		dyn. C _{max} N	stat. C _{0max} N	
18	5.4	25.3	11	16.5	M 5	4.3	4	8	NIP 4 MZ	-	8	900	810	12
18	5.4	25.3	11	16.5	M 5	4.3	4	8	NIP 4 MZ	2.5	8	900	810	16
22	6.9	28	13	21	M 6	5.3	4	10	NIP 4 MZ	-	8	1,430	1,160	
22	6.9	28	13	21	M 6	5.3	4	10	NIP 4 MZ	3	8	1,430	1,160	
25	7.4	32.8	18	24	M 8	6.6	5	11	NIP 4 MZ	-	8	2,200	1,730	20
25	7.4	32.8	18	24	M 8	6.6	5	11	NIP 4 MZ	4	8	2,200	1,730	
30	8.3	40	22	29	M10	8.4	6	15	NIP 5 MZ	-	8	3,950	3,250	25
30	8.3	40	22	29	M10	8.4	6	15	NIP 5 MZ	5	8	3,950	3,250	
35	9.3	44.7	22	34	M10	8.4	6	15	NIP 5 MZ	-	8	5,900	4,500	30
35	9.3	44.7	22	34	M10	8.4	6	15	NIP 5 MZ	5	8	5,900	4,500	
45	11.7	55.9	26	44	M12	10.5	8	18	NIP 5 MZ	-	8	10,200	7,200	40
45	11.7	55.9	26	44	M12	10.5	8	18	NIP 5 MZ	6	8	10,200	7,200	
50	10.6	60	35	49	M16	13.5	10	20	NIP 6 MZ	-	8	15,100	10,400	50
50	10.6	60	35	49	M16	13.5	10	20	NIP 6 MZ	8	8	15,100	10,400	

Linear Ball Bearing Units

KGSNO..PP AS, KGSNOS..PP AS SERIES

- MAX³ Maximum Performance
- Light range - metric sizes
- Sealed, greased with relubrication facility

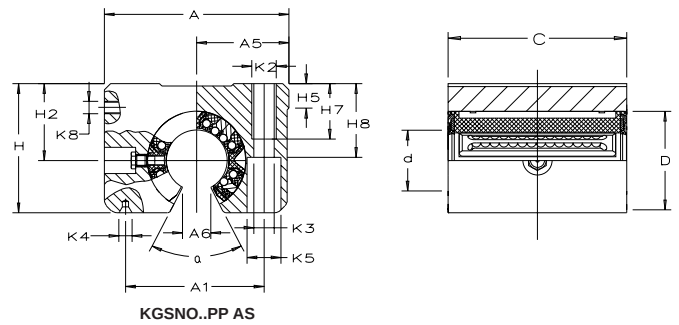

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm											
SHAFT DIAMETER d	PART NUMBER	MASS =kg	DIMENSIONS				MOUNTING DIMENSIONS				
			d	A	C	H	A ₁ ±0.15	A ₅ ±0.01	A ₆ ¹⁾	C ₂ ²⁾ ±0.15	D
12	KGSNO 12 PP AS	0.09	12	43	32	28	32	21.5	7.6	23	22
	KGSNOS 12 PP AS	0.09	12	43	32	28	32	21.5	7.6	23	22
16	KGSNO 16 PP AS	0.15	16	53	37	35	40	26.5	8.9	26	26
	KGSNOS 16 PP AS	0.15	16	53	37	35	40	26.5	8.9	26	26
20	KGSNO 20 PP AS	0.25	20	60	45	42	45	30	9.2	32	32
	KGSNOS 20 PP AS	0.25	20	60	45	42	45	30	9.2	32	32
25	KGSNO 25 PP AS	0.52	25	78	58	51	60	39	11.9	40	40
	KGSNOS 25 PP AS	0.52	25	78	58	51	60	39	11.9	40	40
30	KGSNO 30 PP AS	0.76	30	87	68	60	68	43.5	14.3	45	47
	KGSNOS 30 PP AS	0.76	30	87	68	60	68	43.5	14.3	45	47
40	KGSNO 40 PP AS	1.4	40	108	80	77	86	54	18.8	58	62
	KGSNOS 40 PP AS	1.4	40	108	80	77	86	54	18.8	58	62
50	KGSNO 50 PP AS	2.4	50	132	100	88	108	66	22.7	50	75
	KGSNOS 50 PP AS	2.4	50	132	100	88	108	66	22.7	50	75

¹⁾ Dimension A₆ on diameter C.


²⁾ Dimension C₂ and lubrication hole symmetrical with bearings width C.

³⁾ For fixing screws to EN ISO 4762-8.8.

If there is a possibility of settling, the fixing screws should be secured against rotation.

⁴⁾ The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.

⁵⁾ Centring hole to DIN 332, type A.

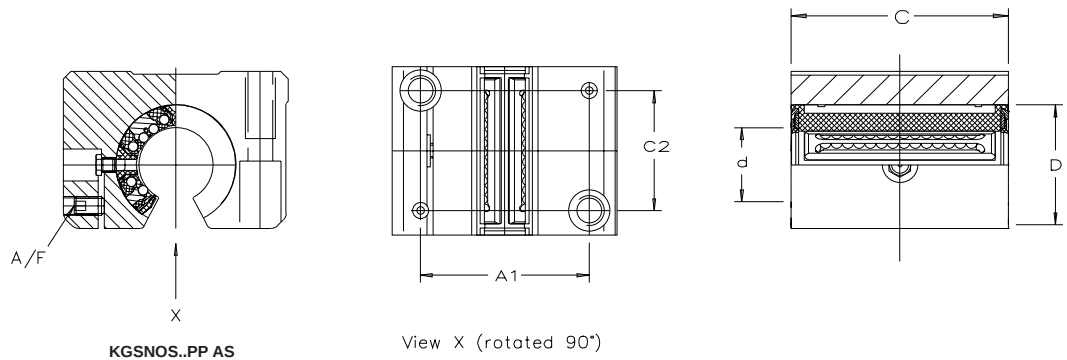


DIMENSION TABLE • Dimensions in mm														
MOUNTING DIMENSIONS											BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER d
H ₂ +0.008 -0.016	H ₅	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁵⁾	K ₅ ³⁾	K ₈ ²⁾	A/F	α Degrees		dyn. C _{max} N	stat. C _{0max} N	
18	6.1	11	16.5	M 5	4.3	1.6 x 3.35	8	NIP 4 MZ	-	78	6	900	810	12
18	6.1	11	16.5	M 5	4.3	1.6 x 3.35	8	NIP 4 MZ	2.5	78	6	900	810	16
22	7.5	13	21	M 6	5.3	1.6 x 3.35	10	NIP 4 MZ	-	68	6	1,430	1,160	
22	7.5	13	21	M 6	5.3	1.6 x 3.35	10	NIP 4 MZ	2.5	68	6	1,430	1,160	20
25	8	18	24	M 8	6.6	2 x 4.25	11	NIP 4 MZ	-	55	6	2,200	1,730	
25	8	18	24	M 8	6.6	2 x 4.25	11	NIP 4 MZ	2.5	55	6	2,200	1,730	
30	8.8	22	29	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	-	57	6	3,950	3,250	
30	8.8	22	29	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	3	57	6	3,950	3,250	30
35	9.7	22	34	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	-	57	6	5,900	4,500	
35	9.7	22	34	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	3	57	6	5,900	4,500	
45	12.4	26	44	M12	10.5	3.15 x 6.7	18	NIP 5 MZ	-	56	6	10,200	7,200	
45	12.4	26	44	M12	10.5	3.15 x 6.7	18	NIP 5 MZ	4	56	6	10,200	7,200	40
50	11.1	35	49	M16	13.5	4 x 8.5	20	NIP 6 MZ	-	54	6	15,100	10,400	
50	11.1	35	49	M16	13.5	4 x 8.5	20	NIP 6 MZ	5	54	6	15,100	10,400	50

Linear Ball Bearing Units

KTSG..PP AS, KTSS..PP AS SERIES

- MAX³ Maximum Performance
- Closed and open designs
- Contact seals on both sides

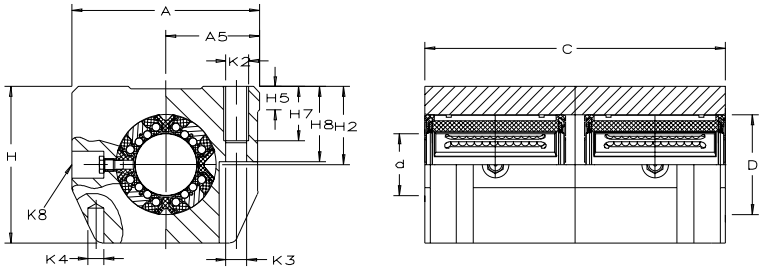



KTSG..PP AS

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm											
SHAFT DIAMETER d	PART NUMBER	MASS ≈kg	DIMENSIONS				MOUNTING DIMENSIONS				
			d	A	C	H	A ₁ ±0.15	A ₅ ±0.01	C ₂ ¹⁾ ±0.15	C ₃ ¹⁾	D
12	KTSG 12 PP AS	0.21	12	43	70	35	32	21.5	56	24	22
	KTSS 12 PP AS	0.21	12	43	70	35	32	21.5	56	24	22
16	KTSG 16 PP AS	0.38	16	53	78	42	40	26.5	64	26	26
	KTSS 16 PP AS	0.38	16	53	78	42	40	26.5	64	26	26
20	KTSG 20 PP AS	0.55	20	60	96	50	45	30	76	33	32
	KTSS 20 PP AS	0.55	20	60	96	50	45	30	76	33	32
25	KTSG 25 PP AS	1.13	25	78	122	60	60	39	94	44	40
	KTSS 25 PP AS	1.13	25	78	122	60	60	39	94	44	40
30	KTSG 30 PP AS	1.78	30	87	142	70	68	43.5	106	54	47
	KTSS 30 PP AS	1.78	30	87	142	70	68	43.5	106	54	47

1) Dimensions and lubrication hole symmetrical with bearing width C.
 2) For fixing screws to EN ISO 4762-8.8.
 If there is a possibility of settling, the fixing screws should be secured against rotation.
 3) Centring for dowel hole.
 4) Lubrication nipple.
 5) The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.
 Basic load ratings in accordance with DIN 636-1.



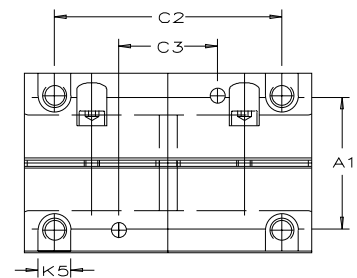

KTSS..PP AS
(same dimensions as KTSG..PP AS)


View X (rotated 90°)

DIMENSION TABLE • Dimensions in mm														
MOUNTING DIMENSIONS											BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER d
H ₂ +0.008 -0.016	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ²⁾	K ₄ ³⁾	K ₅ ²⁾	K ₈ ⁴⁾	A/F		dyn. C _{max} N	stat. C _{0max} N	
18	6	25.3	11	16.5	M 5	4.3	4	8	NIP 4 MZ	-	8	1,460	1,620	12
18	6	25.3	11	16.5	M 5	4.3	4	8	NIP 4 MZ	2.5	8	1,460	1,620	12
22	7.5	28	13	21	M 6	5.3	4	10	NIP 4 MZ	-	8	2,330	2,320	16
22	7.5	28	13	21	M 6	5.3	4	10	NIP 4 MZ	3	8	2,330	2,320	16
25	8	32.8	18	24	M 8	6.6	5	11	NIP 4 MZ	-	8	3,650	3,450	20
25	8	32.8	18	24	M 8	6.6	5	11	NIP 4 MZ	4	8	3,650	3,450	20
30	9	40	22	29	M10	8.4	6	15	NIP 5 MZ	-	8	6,400	6,500	25
30	9	40	22	29	M10	8.4	6	15	NIP 5 MZ	5	8	6,400	6,500	25
35	10	44.7	22	34	M10	8.4	6	15	NIP 5 MZ	-	8	9,600	9,000	30
35	10	44.7	22	34	M10	8.4	6	15	NIP 5 MZ	5	8	9,600	9,000	30

Linear Ball Bearing Units

KTSO..PP AS, KTSOS..PP AS SERIES

- MAX³ Maximum Performance
- Open design
- Contact seals on both sides

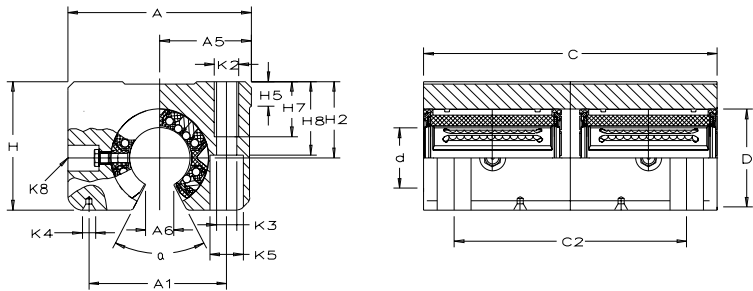



KTSO..PP AS

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm												
SHAFT DIAMETER d	PART NUMBER	MASS =kg	DIMENSIONS				MOUNTING DIMENSIONS					
			d	A	C	H	A ₁ ±0.15	A ₅ ±0.01	A ₆ ¹⁾	C ₂ ²⁾ ±0.15	C ₃ ²⁾	D
12	KTSO 12 PP AS	0.118	12	43	70	28	32	21.5	6.5	56	24	22
	KTSOS 12 PP AS	0.18	12	43	70	28	32	21.5	6.5	56	24	22
16	KTSO 16 PP AS	0.34	16	53	78	35	40	26.5	8.9	64	26	26
	KTSOS 16 PP AS	0.34	16	53	78	35	40	26.5	8.9	64	26	26
20	KTSO 20 PP AS	0.51	20	60	96	42	45	30	9.2	76	33	32
	KTSOS 20 PP AS	0.51	20	60	96	42	45	30	9.2	76	33	32
25	KTSO 25 PP AS	1.03	25	78	122	51	60	39	11.9	94	44	40
	KTSOS 25 PP AS	1.03	25	78	122	51	60	39	11.9	94	44	40
30	KTSO 30 PP AS	1.8	30	87	142	60	68	43.5	14.3	106	54	47
	KTSOS 30 PP AS	1.8	30	87	142	60	68	43.5	14.3	106	54	47

1) Dimensions A₆ on diameter d.
 2) Dimensions and lubrication hole symmetrical with bearing width C.
 3) For fixing screws to EN ISO 4762-8.8.
 If there is a possibility of settling, the fixing screws should be secured against rotation.
 4) Lubrication nipple.
 5) The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.
 Basic load ratings in accordance with DIN 636-1.
 6) Centring hole to DIN 332, type A.





KTSOS..PP AS
(Same dimensions as KTSO..PP AS)


View X (rotated 90°)

DIMENSION TABLE • Dimensions in mm														
MOUNTING DIMENSIONS											BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER d
H ₂ +0.008 -0.016	H ₅	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁶⁾	K ₅ ³⁾	K ₈ ⁴⁾	A/F	α Degrees		dyn. C _{max} N	stat. C _{0max} N	
18	6.1	11	16.5	M 5	4.3	1.6 x 3.35	8	NIP 4 MZ	-	66	6	1,460	1,620	12
18	6.1	11	16.5	M 5	4.3	1.6 x 3.35	8	NIP 4 MZ	2.5	66	6	1,460	1,620	
22	7.5	13	21	M 6	5.3	1.6 x 3.35	10	NIP 4 MZ	-	68	6	2,330	2,320	16
22	7.5	13	21	M 6	5.3	1.6 x 3.35	10	NIP 4 MZ	2.5	68	6	2,330	2,320	
25	8	18	24	M 8	6.6	2.0 x 4.25	11	NIP 4 MZ	-	55	6	3,650	3,450	20
25	8	18	24	M 8	6.6	2.0 x 4.25	11	NIP 4 MZ	2.5	55	6	3,650	3,450	
30	8.8	22	29	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	-	57	6	6,400	6,500	25
30	8.8	22	29	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	3	57	6	6,400	6,500	
35	9.7	22	34	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	-	57	6	9,600	9,000	30
35	9.7	22	34	M10	8.4	2.5 x 5.3	15	NIP 5 MZ	3	57	6	9,600	9,000	

Linear Ball Bearing Units

KGSC..PP AS, KGSCS..PP AS SERIES

- MAX³ Maximum Performance
- Light range - metric sizes
- Sealed, greased with relubrication facility

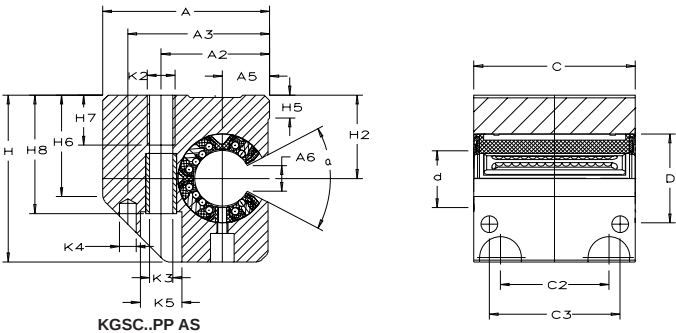


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm												
SHAFT DIAMETER d	PART NUMBER	MASS =kg	DIMENSIONS					MOUNTING DIMENSIONS				
			d	A	C	H	A ₂ ±0.15	A ₃	A ₅ ±0.01	A ₆ ¹⁾	C ₂ ²⁾ ±0.15	C ₃ ²⁾
20	KGSC 20 PP AS	0.35	20	60	47	60	39	51	17	9.2	30	36
	KGSCS 20 PP AS	0.35	20	60	47	60	39	51	17	9.2	30	36
25	KGSC 25 PP AS	0.68	25	75	58	72	49	64	21	12	36	45
	KGSCS 25 PP AS	0.68	25	75	58	72	49	64	21	12	36	45
30	KGSC 30 PP AS	1	30	86	68	82	59	76	25	14.3	42	52
	KGSCS 30 PP AS	1	30	86	68	82	59	76	25	14.3	42	52
40	KGSC 40 PP AS	1.8	40	110	80	100	75	97	32	18.8	48	60
	KGSCS 40 PP AS	1.8	40	110	80	100	75	97	32	18.8	48	60
50	KGSC 50 PP AS	2.9	50	127	100	115	88	109	38	22.7	62	80
	KGSCS 50 PP AS	2.9	50	127	100	115	88	109	38	22.7	62	80

- ¹⁾ Dimension A₆ on diameter d.
²⁾ Dimension C₂ and lubrication hole symmetrical with bearing width C.
³⁾ Centring for dowel hole.
⁴⁾ For fixing screws to EN ISO 4762-8.8.
If there is a possibility of settling, the fixing screws should be secured against rotation.
⁵⁾ The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.



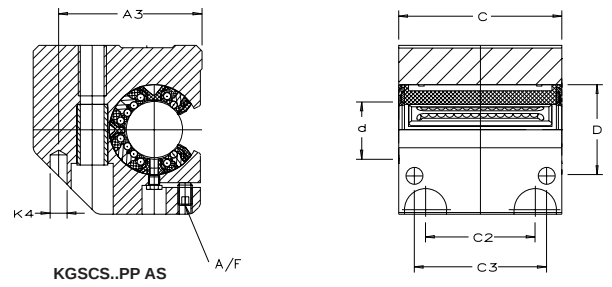

DIMENSION TABLE • Dimensions in mm																
MOUNTING DIMENSIONS													BALL ROWS	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER
D	H ₂ +0.008 -0.016	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁴⁾	K ₅ ³⁾	K ₈ ²⁾	A/F	α Degrees	QUANTITY	dyn. C _{max} N	stat. C _{0max} N	d
32	30	8.3	37.5	18	42.6	M10	8.4	6	15	NIP 4 MZ	-	55	6	2,200	1,730	20
32	30	8.3	37.5	18	42.6	M10	8.4	6	15	NIP 4 MZ	2.5	55	6	2,200	1,730	
40	35	8.2	45	22	50.6	M12	10.5	8	18	NIP 5 MZ	-	57	6	3,950	3,250	25
40	35	8.2	45	22	50.6	M12	10.5	8	18	NIP 5 MZ	3	57	6	3,950	3,250	
47	40	9	52	29	55.6	M16	13.5	10	20	NIP 5 MZ	-	57	6	5,900	4,500	30
47	40	9	52	29	55.6	M16	13.5	10	20	NIP 5 MZ	3	57	6	5,900	4,500	
62	45	9.5	60	36	67.6	M20	15.5	12	24	NIP 5 MZ	-	56	6	10,200	7,200	40
62	45	9.5	60	36	67.6	M20	15.5	12	24	NIP 5 MZ	4	56	6	10,200	7,200	
75	50	8.6	70	36	78.8	M20	17.5	12	26	NIP 6 MZ	-	54	6	15,100	10,400	50
75	50	8.6	70	36	78.8	M20	17.5	12	26	NIP 6 MZ	5	54	6	15,100	10,400	

Linear Ball Bearing Units

KTFS..PP AS SERIES

- MAX³ Maximum Performance
- Light range - metric sizes
- Sealed, greased with relubrication facility

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572.

DIMENSION TABLE • Dimensions in mm											
SHAFT DIAMETER d	PART NUMBER	MASS ≈kg	DIMENSIONS				MOUNTING DIMENSIONS				
			d	A	C	H	A ₁ ±0.15	C ₁	C ₃	C ₇	D
12	KTFS 12 PP AS	0.2	12	41	70	34	32	40	10	35	22
16	KTFS 16 PP AS	0.3	16	50	78	40	38	50	10	39	26
20	KTFS 20 PP AS	0.5	20	60	96	50	45	60	10	48	32
25	KTFS 25 PP AS	1	25	74	122	60	56	73	10	61	40
30	KTFS 30 PP AS	1.4	30	84	142	70	64	82	10	71	47

¹⁾ Recommendation: locating bore D₁ H7.

²⁾ The basic load ratings apply only to hardened (670 to 840 HV) and ground shaft raceways.



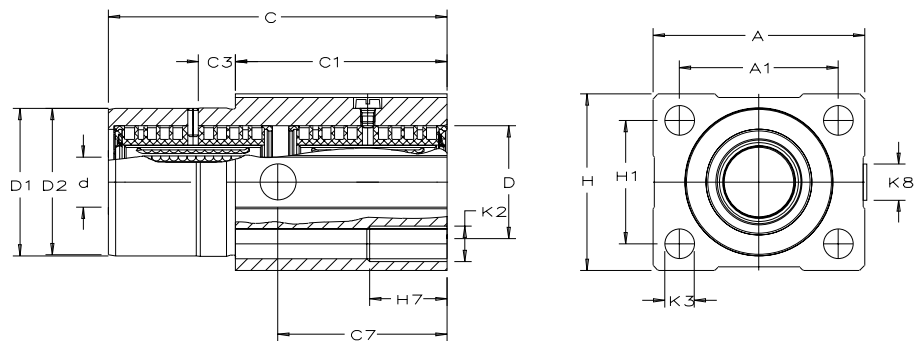


KTFS..PP AS

DIMENSION TABLE • Dimensions in mm										
MOUNTING DIMENSIONS							BALL ROWS QUANTITY	BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER d
D ₁ ¹⁾ g7	D ₂ -0.1 -0.3	H ₁ ±0.15	H ₇	K ₂	K ₃	K ₈		dyn. C _{max} N	stat. C _{0max} N	
30	30	24	13	M 6	5.3	M8x1	8	1,460	1,620	12
35	35	28	18	M 8	6.6	M8x1	8	2,330	2,320	16
42	42	35	22	M10	8.4	M8x1	8	3,650	3,450	20
52	52	42	26	M12	10.5	M8x1	8	6,400	6,500	25
61	61	50	35	M16	13.5	M8x1	8	9,600	9,000	30

Linear Ball Bearings

KH SERIES


- Compact Range
- With Relubrication Facility

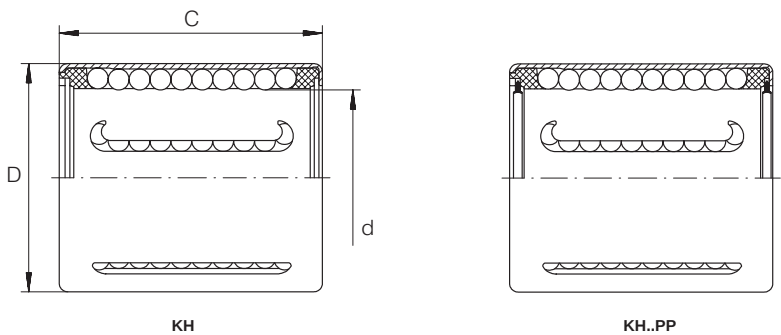

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm											
SHAFT DIA.	PART NUMBER ¹⁾	MASS g	DIMENSIONS			MOUNTING DIMENSIONS		BASIC LOAD RATINGS ²⁾			
			d	D	C	C ₇	K ₈	dyn. C _{0 min} N	stat. C _{0 min} N	dyn. C _{0 max} N	stat. C _{0 max} N
6	KH 0622	7	6	12	22	4	2	340	239	390	340
8	KH 0824	12	8	15	24	6	2	410	280	475	400
10	KH 1026	14.5	10	17	26	6	2.5	510	370	590	520
12	KH 1228	18.5	12	19	28	6	2.5	670	510	800	740
14	KH 1428	20.5	14	21	28	6	2.5	690	520	830	760
16	KH 1630	27.5	16	24	30	7	2.5	890	620	1,060	910
20	KH 2030	32.5	20	28	30	7	2.5	1,110	790	1,170	1,010
25	KH 2540	66	25	35	40	8	2.5	2,280	1,670	2,420	2,130
30	KH 3050	95	30	40	50	8	2.5	3,300	2,700	3,300	3,100
40	KH 4060	182	40	52	60	9	2.5	5,300	4,450	5,300	4,950
50	KH 5070	252	50	62	70	9	2.5	6,800	6,300	6,800	7,000

1) Linear ball bearings sealed on both sides: suffix "PP".
 2) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.

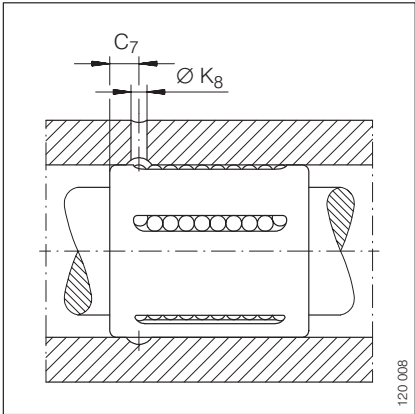

Linear Ball Bearing And Housing Units KGHK..B PP AS SERIES


- Compact Range
- Sealed, Greased, With Relubrication Facility

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm									
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS		
			d	A	C	H	A ₁ ± 0.15	A ₄	C ₇
6	KGHK 06 B PP AS	0.04	6	32	22	27	23	25	4
8	KGHK 08 B PP AS	0.05	8	32	24	27	23	25	5
10	KGHK 10 B PP AS	0.07	10	40	26	33	29	32	5
12	KGHK 12 B PP AS	0.08	12	40	28	33	29	32	5.5
14	KGHK 14 B PP AS	0.1	14	43	28	36.5	34	34	5.5
16	KGHK 16 B PP AS	0.11	16	43	30	36.5	34	34	6
20	KGHK 20 B PP AS	0.15	20	53	30	42.5	40	40	6
25	KGHK 25 B PP AS	0.27	25	60	40	52.5	48	44	8
30	KGHK 30 B PP AS	0.4	30	67	50	60	53	49.5	9
40	KGHK 40 B PP AS	0.75	40	87	60	73.5	69	63	10
50	KGHK 50 B PP AS	1.25	50	103	70	92	82	74	12

- 1) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
 2) Lubrication nipple.
 3) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



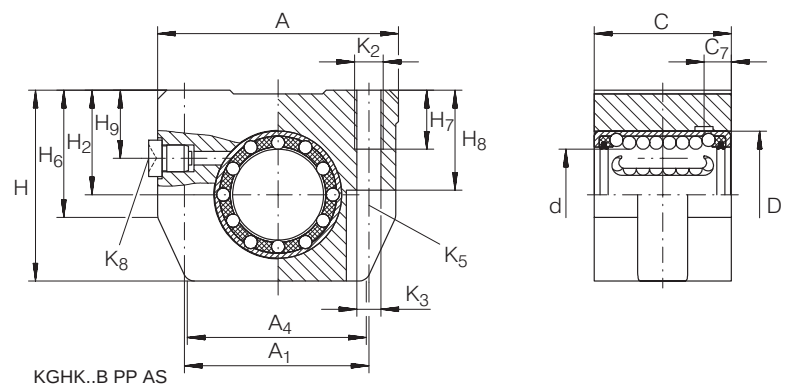

										BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER
D	H ₂ +0.010 -0.014	H ₆	H ₇	H ₈	H ₉	K ₂	K ₃ ¹⁾	K ₅ ¹⁾	K ₈ ²⁾	dyn. C N	stat. C ₀ N	
12	13	19.5	9	13	9	M4	3.4	M3	NIP A1	340	239	6
15	14	19.5	9	13	9	M4	3.4	M3	NIP A1	410	280	8
17	16	24	11	16	11	M5	4.3	M4	NIP A1	510	370	10
19	17	24	11	16	11	M5	4.3	M4	NIP A1	670	510	12
21	18	26.8	11	18	13	M5	4.3	M4	NIP A1	690	520	14
24	19	26.8	11	18	13	M5	4.3	M4	NIP A1	890	620	16
28	23	28.5	13	22	15	M6	5.3	M5	NIP A2	1,110	790	20
35	27	35.5	18	26	17.5	M8	6.6	M6	NIP A2	2,280	1,670	25
40	30	41.5	18	29	18	M8	6.6	M6	NIP A2	3,300	2,700	30
52	39	48	22	38	23	M10	8.4	M8	NIP A2	5,300	4,450	40
62	47	61	26	46	28	M12	10.5	M10	NIP A2	6,800	6,300	50

Linear Ball Bearing And Housing Units

KTHK..B PP AS SERIES


- Compact Range
- Sealed, Greased, With Relubrication Facility

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm									
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS		
			d	A	C	H	A ₁ ± 0.15	A ₄	C ₂ ¹⁾ ± 0.15
12	KTHK 12 B PP AS	0.17	12	40	60	33	29	32	35
16	KTHK 16 B PP AS	0.23	16	43	65	36.5	34	34	40
20	KTHK 20 B PP AS	0.32	20	53	65	42.5	40	40	45
25	KTHK 25 B PP AS	0.58	25	60	85	52.5	48	44	55
30	KTHK 30 B PP AS	0.85	30	67	105	60	53	49.6	70
40	KTHK 40 B PP AS	1.6	40	87	125	73.5	69	63	85
50	KTHK 50 B PP AS	2.7	50	103	145	92	82	74	100

- ¹⁾ Dimension C₂ and lubrication hole centered on bearing width C.
- ²⁾ For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
- ³⁾ Lubrication nipple.
- ⁴⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways and uniform loading on both the linear ball bearings.



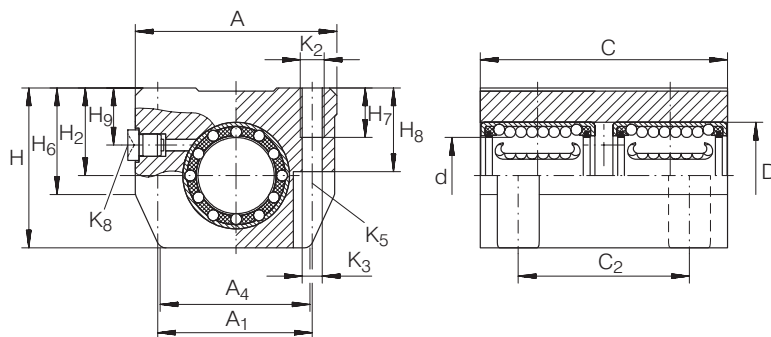

KTHK..B PP AS

										BASIC LOAD RATINGS ⁴⁾		SHAFT DIAMETER
D	H ₂ +0.010 -0.014	H ₆	H ₇	H ₈	H ₉	K ₂	K ₃ ²⁾	K ₅ ²⁾	K ₈ ³⁾	dyn. C N	stat. C ₀ N	
19	17	24	11	16	11	M5	4.3	M4	NIP A1	1,090	1,020	12
24	19	26.8	11	18	13	M5	4.3	M4	NIP A1	1,440	1,240	16
28	23	28.5	13	22	15	M6	5.3	M5	NIP A2	1,800	1,580	20
35	27	35.5	18	26	17.5	M8	6.6	M6	NIP A2	3,700	3,350	25
40	30	41.5	18	29	18	M8	6.6	M6	NIP A2	5,400	5,400	30
52	39	48	22	38	22	M10	8.4	M8	NIP A2	8,600	8,900	40
62	47	61	26	46	26	M12	10.5	M10	NIP M8x1	11,000	12,600	50

Linear Ball Bearing And Housing Units KGHW..PP SERIES


- Adjusting Range
- Sealed, Greased

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm						
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS			
			d	A ± 0.5	C	H
16	KGHW 16 PP	0.2	16	85.7	30	43.2
20	KGHW 20 PP	0.25	20	85.7	30	43.2
25	KGHW 25 PP	0.39	25	108	40	56.5

¹⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



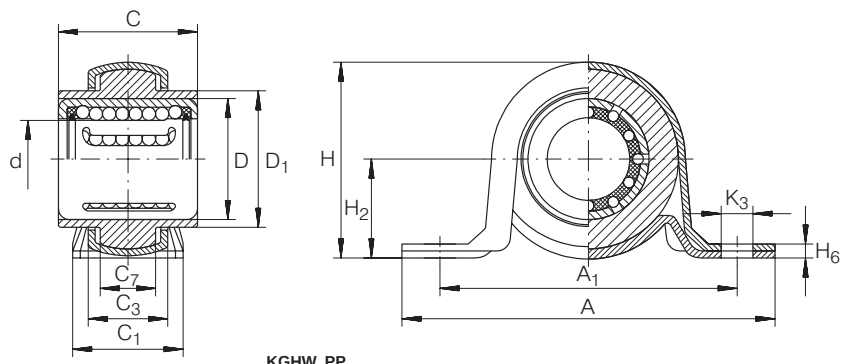

MOUNTING DIMENSIONS									BASIC LOAD RATINGS ¹⁾		SHAFT DIAMETER
A ₁ ± 0.25	C ₁	C ₃	C ₇	D	D ₁	H ₂ ± 0.2	H ₆	K ₃	dyn. C N	stat. C ₀ N	
68.3	25.4	18.8	13.2	24	32	22.2	3	9.5	890	620	16
68.3	25.4	18.8	13.2	28	32	22.2	3	9.5	1,110	790	20
86	32	23.5	14.5	35	39.5	28.6	4	11.5	2,280	1,670	25

Linear Ball Bearing And Housing Units KGHWT..PP SERIES


- Adjusting Range
- Sealed, Greased

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm						
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS			
			d	A	C	H
16	KGHWT 16 PP	0.19	16	81	30	58.7
20	KGHWT 20 PP	0.18	20	81	30	58.7
25	KGHWT 25 PP	0.28	25	90.5	40	66

¹⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



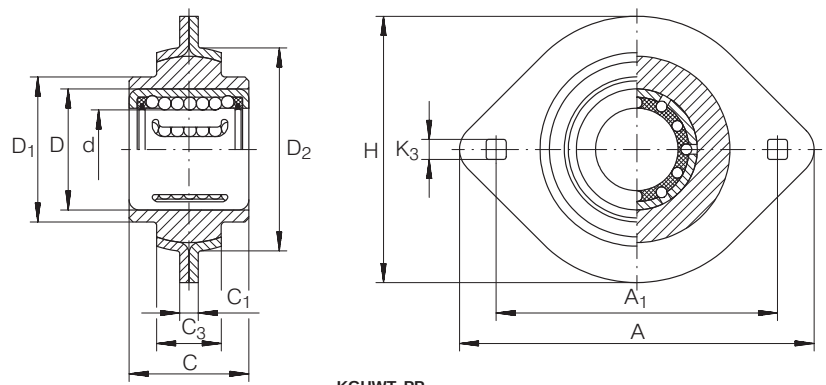


MOUNTING DIMENSIONS							BASIC LOAD RATINGS ¹⁾		SHAFT DIAMETER
A ₁ ± 0.15	C ₁ ± 0.5	C ₃ +1	D	D ₁	D ₂	K ₃	dyn. C N	stat. C ₀ N	
63.5	4	14	24	30	44	7	890	620	16
63.5	4	14	28	32	44	7	1,110	790	20
71.5	4.4	16	35	40	51	8.7	2,280	1,670	25

Linear Ball Bearings

KN, KNO SERIES


- Light Range
- With Relubrication Facility

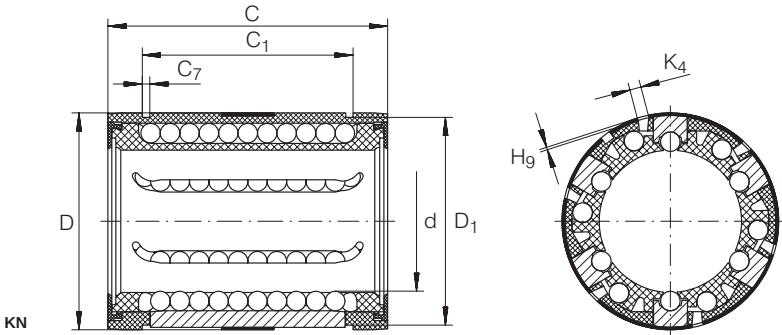

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm										
SHAFT DIAMETER	PART NUMBER		MASS	DIMENSIONS			MOUNTING DIMENSIONS			
			kg	d	D	C	A ₆ ²⁾	C ₁ H13	C ₇	D ₁
12	KN 1232		0.02	12	22	32	–	22.6	1.3	21
16	KN 1636	KNO 1232	0.02	12	22	32	6.5	–	–	–
			0.03	16	26	36	–	24.6	1.3	25
		KNO 1636	0.02	16	26	36	9	–	–	–
20	KN 2045		0.06	20	32	45	–	31.2	1.6	30.7
25	KN 2558	KNO 2045	0.05	20	32	45	9	–	–	–
			0.13	25	40	58	–	43.7	1.85	38
		KNO 2558	0.11	25	40	58	11.5	–	–	–
30	KN 3068		0.19	30	47	68	–	51.7	1.85	44.7
40	KN 4080	KNO 3068	0.16	30	47	68	14	–	–	–
			0.35	40	62	80	–	60.3	2.15	59.4
		KNO 4080	0.3	40	62	80	19	–	–	–
50	KN 50100		0.56	50	75	100	–	77.3	2.65	71.4
		KNO 50100	0.47	50	75	100	22.5	–	–	–

- 1) Linear ball bearings sealed on both sides: suffix "PP".
- 2) Dimension A₆ on diameter d.
- 3) Hole position centered on bearing width C.
- 4) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.
- 5) Basic load rating in main load direction.

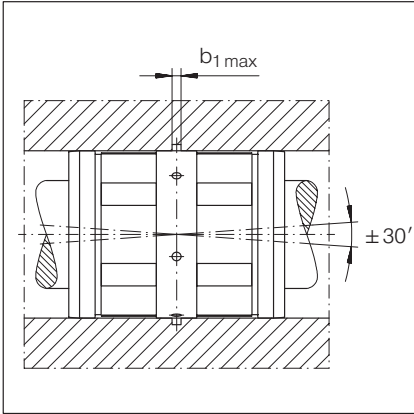


Misalignment compensation ± 30'



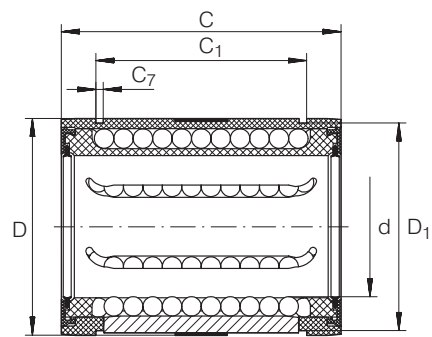


KN..PP



KNO, KNO..PP

										ACCESSORIES	
				MOUNTING DIMENSION	BALL ROWS	BASIC LOAD RATINGS ⁴⁾				SUITABLE CIRCLIPS TO DIN 471	SHAFT DIAMETER
H ₉	H ₁₀	K ₄ ³⁾	α Grad	b ₁ max.	NUMBER	dyn. C ₀ min N	stat. C ₀ min N	dyn. C ₀ max N	stat. C ₀ max N		
0.7	—	3	—	1.5	5	730	510	870	740	22 × 1.2	12
0.7	—	3	66	1.5	4	—	—	840 ⁵⁾	640 ⁵⁾	—	—
0.7	—	3	—	1.5	5	870	620	1,040	910	26 × 1.2	16
0.7	—	3	68	1.5	4	—	—	1,000 ⁵⁾	750 ⁵⁾	—	—
0.9	—	3	—	2.5	6	1,730	1,230	1,830	1,570	32 × 1.5	20
0.9	—	3	55	2.5	5	—	—	1,740 ⁵⁾	1,240 ⁵⁾	—	—
1.4	—	3	—	2.5	6	3,100	2,220	3,250	2,850	42 × 1.75	25
1.4	1.5	3	57	2.5	5	—	—	3,100 ⁵⁾	2,260 ⁵⁾	—	—
2.2	—	3	—	2.5	6	3,750	2,850	3,950	3,650	48 × 1.75	30
2.2	2	3	57	2.5	5	—	—	3,750 ⁵⁾	2,850 ⁵⁾	—	—
2.2	—	3	—	3	6	6,900	4,900	7,300	6,300	63 × 2	40
2.2	1.5	3	56	3	5	—	—	6,900 ⁵⁾	4,900 ⁵⁾	—	—
2.3	—	5	—	3	6	10,000	7,200	10,600	9,200	75 × 2.5	50
2.3	2.5	5	54	3	5	—	—	10,000 ⁵⁾	7,200 ⁵⁾	—	—

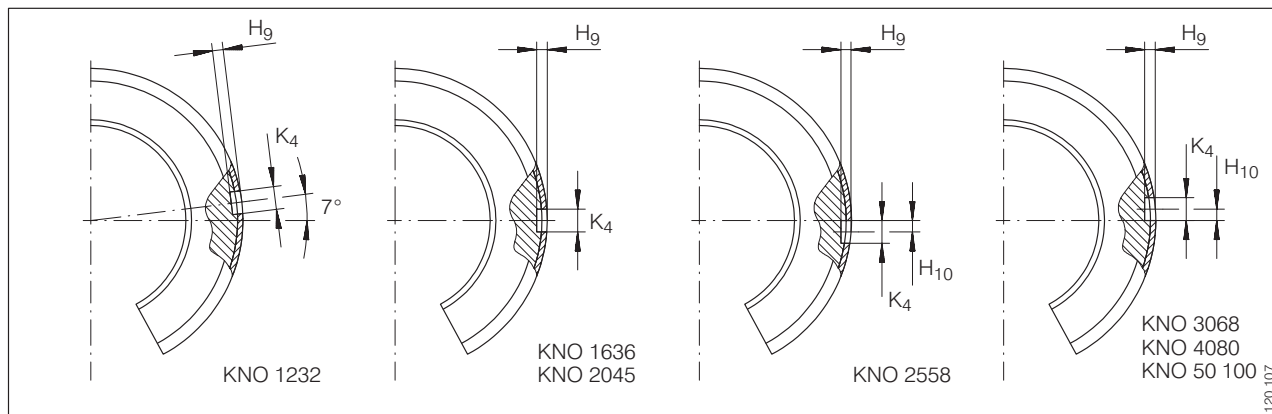


Fixing holes

Linear Ball Bearing And Housing Units

KGN..B PP AS, KGNS..B PP AS SERIES

- Light range
- Sealed, Greased, With Relubrication Facility

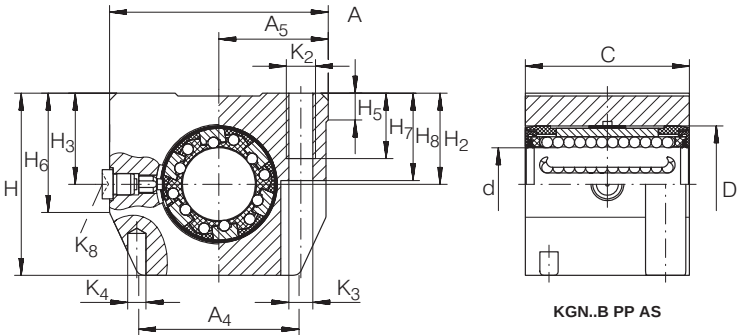


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm											
SHAFT DIAMETER	PART NUMBER	MASS kg	Dimensions				MOUNTING DIMENSIONS				
			d	A	C	H	A ₁	A ₄	A ₅ ± 0.01	C ₂ ¹⁾	D
12	KGN 12 B PP AS	0.1	12	43	32	35	32 ± 0.15	34	21.5	23 ± 0.15	22
	KGNS 12 B PP AS	0.1	12	43	32	35	32 ± 0.15	34	21.5	23 ± 0.15	22
16	KGN 16 B PP AS	0.17	16	53	37	42	40 ± 0.15	40	26.5	26 ± 0.15	26
	KGNS 16 B PP AS	0.17	16	53	37	42	40 ± 0.15	40	26.5	26 ± 0.15	26
20	KGN 20 B PP AS	0.27	20	60	45	50	45 ± 0.15	44	30	32 ± 0.15	32
	KGNS 20 B PP AS	0.27	20	60	45	50	45 ± 0.15	44	30	32 ± 0.15	32
25	KGN 25 B PP AS	0.56	25	78	58	60	60 ± 0.15	59.5	39	40 ± 0.15	40
	KGNS 25 B PP AS	0.56	25	78	58	60	60 ± 0.15	59.5	39	40 ± 0.15	40
30	KGN 30 B PP AS	0.83	30	87	68	70	68 ± 0.15	63	43.5	45 ± 0.15	47
	KGNS 30 B PP AS	0.83	30	87	68	70	68 ± 0.15	63	43.5	45 ± 0.15	47
40	KGN 40 B PP AS	1.55	40	108	80	90	86 ± 0.15	76	54	58 ± 0.15	62
	KGNS 40 B PP AS	1.55	40	108	80	90	86 ± 0.15	76	54	58 ± 0.15	62
50	KGN 50 B PP AS	2.7	50	132	100	105	108 ± 0.2	90	66	50 ± 0.2	75
	KGNS 50 B PP AS	2.7	50	132	100	105	108 ± 0.2	90	66	50 ± 0.2	75

- ¹⁾ Dimension C₂ and lubrication hole centered on bearing width C.
- ²⁾ For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
- ³⁾ Centring for dowel hole.
- ⁴⁾ Lubrication nipple.
- ⁵⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.





KGNS..B PP AS

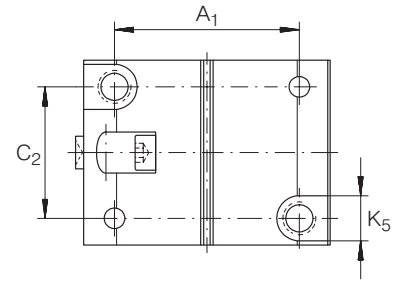


View X

												BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
H ₂ +0.008 -0.016	H ₃	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ²⁾	K ₄ ³⁾	K ₅ ²⁾	K ₈ ¹⁾⁴⁾	A/F	NUMBER	dyn. C N	stat. C ₀ N	
18	18	6	25.5	11	16.5	M5	4.3	4	8	NIP A1	—	5	780	560	12
18	18	6	25.5	11	16.5	M5	4.3	4	8	NIP A1	2.5	5	780	560	12
22	22	7	28	13	21	M6	5.3	4	10	NIP A1	—	5	1,000	750	16
22	22	7	28	13	21	M6	5.3	4	10	NIP A1	3	5	1,000	750	16
25	25	7.5	33	18	24	M8	6.6	5	11	NIP A1	—	6	1,740	1,240	20
25	25	7.5	33	18	24	M8	6.6	5	11	NIP A1	4	6	1,740	1,240	20
30	30	8.5	40	22	29	M10	8.4	6	15	NIP A2	—	6	3,100	2,230	25
30	30	8.5	40	22	29	M10	8.4	6	15	NIP A2	5	6	3,100	2,230	25
35	35	9.5	44.5	22	34	M10	8.4	6	15	NIP A2	—	6	3,800	2,900	30
35	35	9.5	44.5	22	34	M10	8.4	6	15	NIP A2	5	6	3,800	2,900	30
45	45	11	56	26	44	M12	10.5	8	18	NIP A2	—	6	6,900	4,950	40
45	45	11	56	26	44	M12	10.5	8	18	NIP A2	6	6	6,900	4,950	40
50	50	11	60	35	49	M16	13.5	10	20	NIP A2	—	6	10,100	7,300	50
50	50	11	60	35	49	M16	13.5	10	20	NIP A2	8	6	10,100	7,300	50

Linear Ball Bearing And Housing Units

KGNO..PP AS, KGNOS..PP AS SERIES

- Light Range
- Sealed, Greased, With Relubrication Facility

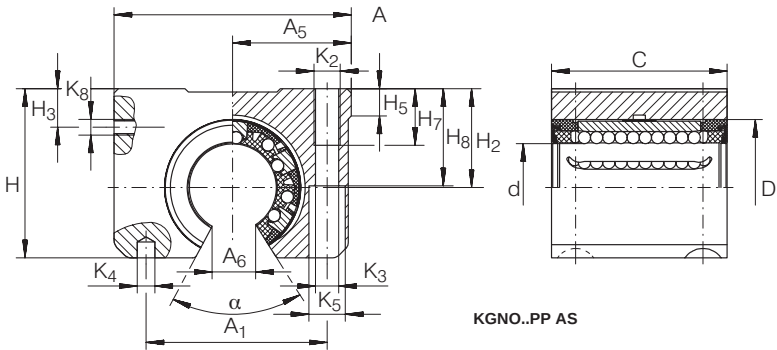


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm												
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS					H ₂ +0.008 -0.016
			d	A	C	H	A ₁	A ₅ ± 0.01	A ₆ ¹⁾	C ₂ ²⁾	D	
12	KGNO 12 PP AS	0.09	12	43	32	28	32 ^{±0.15}	21.5	6.5	23 ^{±0.15}	22	18
	KGNOS 12 PP AS	0.09	12	43	32	28	32 ^{±0.15}	21.5	6.5	23 ^{±0.15}	22	18
16	KGNO 16 PP AS	0.15	16	53	37	35	40 ^{±0.15}	26.5	9	26 ^{±0.15}	26	22
	KGNOS 16 PP AS	0.15	16	53	37	35	40 ^{±0.15}	26.5	9	26 ^{±0.15}	26	22
20	KGNO 20 PP AS	0.25	20	60	45	42	45 ^{±0.15}	30	9	32 ^{±0.15}	32	25
	KGNOS 20 PP AS	0.25	20	60	45	42	45 ^{±0.15}	30	9	32 ^{±0.15}	32	25
25	KGNO 25 PP AS	0.52	25	78	58	51	60 ^{±0.15}	39	11.5	40 ^{±0.15}	40	30
	KGNOS 25 PP AS	0.52	25	78	58	51	60 ^{±0.15}	39	11.5	40 ^{±0.15}	40	30
30	KGNO 30 PP AS	0.76	30	87	68	60	68 ^{±0.15}	43.5	14	45 ^{±0.15}	47	35
	KGNOS 30 PP AS	0.76	30	87	68	60	68 ^{±0.15}	43.5	14	45 ^{±0.15}	47	35
40	KGNO 40 PP AS	1.4	40	108	80	77	86 ^{±0.15}	54	19	58 ^{±0.15}	62	45
	KGNOS 40 PP AS	1.4	40	108	80	77	86 ^{±0.15}	54	19	58 ^{±0.15}	62	45
50	KGNO 50 PP AS	2.4	50	132	100	88	108 ^{±0.2}	66	22.5	50 ^{±0.2}	75	50
	KGNOS 50 PP AS	2.4	50	132	100	88	108 ^{±0.2}	66	22.5	50 ^{±0.2}	75	50

- In the interim, linear ball bearing and housing units KGNO..PP AS and KGNOS..PP AS with profile grooves will still be supplied.
- 1) Dimension A₆ on diameter d.
 - 2) Dimension C₂ and lubrication hole centered on bearing width C.
 - 3) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
 - 4) Centring for dowel hole.
 - 5) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.





KGNOS..PP AS

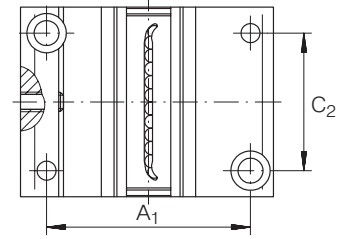


View X

											BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
H ₃	H ₅	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁴⁾	K ₅ ³⁾	K ₆ ²⁾	A/F	α Grad	NUMBER	dyn. C N	stat. C ₀ N	
8	6	11	16.5	M5	4.3	4	8	M6	—	66	4	840	640	12
8	6	11	16.5	M5	4.3	4	8	M6	2.5	66	4	840	640	
10	7.5	13	21	M6	5.3	4	10	M6	—	68	4	1,000	750	16
10	7.5	13	21	M6	5.3	4	10	M6	2.5	68	4	1,000	750	
11	8	18	24	M8	6.6	5	11	M6	—	55	5	1,740	1,240	20
11	8	18	24	M8	6.6	5	11	M6	2.5	55	5	1,740	1,240	
12.5	9	22	29	M10	8.4	6	15	M8 × 1	—	57	5	3,100	2,260	25
12.5	9	22	29	M10	8.4	6	15	M8 × 1	3	57	5	3,100	2,260	
14	9.5	22	34	M10	8.4	6	15	M8 × 1	—	57	5	3,750	2,850	30
14	9.5	22	34	M10	8.4	6	15	M8 × 1	3	57	5	3,750	2,850	
17.5	12	26	44	M12	10.5	8	18	M8 × 1	—	56	5	6,900	4,900	40
17.5	12	26	44	M12	10.5	8	18	M8 × 1	4	56	5	6,900	4,900	
17.5	12	35	49	M16	13.5	10	20	M8 × 1	—	54	5	10,000	7,200	50
17.5	12	35	49	M16	13.5	10	20	M8 × 1	5	54	5	10,000	7,200	

Linear Ball Bearing And Housing Units

KGNC..PP AS, KGNCs..PP AS SERIES

- Light Range
- Sealed, Greased,With Relubrication Facility

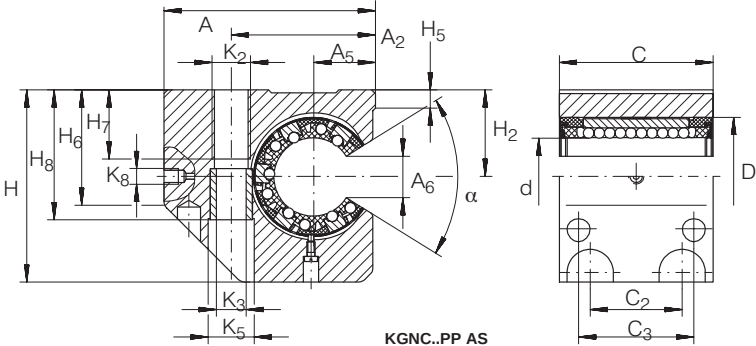


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm													
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS						
			d	A	C	H	A ₂ ± 0.15	A ₃	A ₅ ± 0.01	A ₆ ¹⁾	C ₂ ²⁾ ± 0.15	C ₃ ²⁾	D
20	KGNC 20 PP AS	0.35	20	60	47	60	39	51	17	9	30	36	32
	KGNCs 20 PP AS	0.35	20	60	47	60	39	51	17	9	30	36	32
25	KGNC 25 PP AS	0.68	25	75	58	72	49	64	21	11.5	36	45	40
	KGNCs 25 PP AS	0.68	25	75	58	72	49	64	21	11.5	36	45	40
30	KGNC 30 PP AS	1	30	86	68	82	59	76	25	14	42	52	47
	KGNCs 30 PP AS	1	30	86	68	82	59	76	25	14	42	52	47
40	KGNC 40 PP AS	1.8	40	110	80	100	75	97	32	19	48	60	62
	KGNCs 40 PP AS	1.8	40	110	80	100	75	97	32	19	48	60	62
50	KGNC 50 PP AS	2.9	50	127	100	115	88	109	38	22.5	62	80	75
	KGNCs 50 PP AS	2.9	50	127	100	115	88	109	38	22.5	62	80	75

- In the interim, linear ball bearing and housing units KGNC..PP AS and KGNCs..PP AS with profile grooves will still be supplied.
- 1) Dimension A₆ on diameter d.
 - 2) Dimension C₂, C₃ and lubrication hole centered on bearing width C.
 - 3) Centring for dowel hole.
 - 4) For fixing screws to DIN 912-8.8 and spring washer to DIN 7980.
 - 5) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.






KGNCs..PP AS

												BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
H ₂ +0.008 -0.016	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁴⁾	K ₅ ³⁾	K ₈ ²⁾	A/F	α Grad	NUMBER	dyn. C N	stat. C ₀ N	
30	8	37.5	18	42.5	M10	8.4	6	15	M6	—	55	5	1,740	1,240	20
30	8	37.5	18	42.5	M10	8.4	6	15	M6	2.5	55	5	1,740	1,240	
35	8	45	22	50.5	M12	10.5	8	18	M8 × 1	—	57	5	3,100	2,269	
35	8	45	22	50.5	M12	10.5	8	18	M8 × 1	3	57	5	3,100	2,260	25
40	9	52	29	55.5	M16	13.5	10	20	M8 × 1	—	57	5	3,750	2,850	
40	9	52	29	55.5	M16	13.5	10	20	M8 × 1	3	57	5	3,750	2,850	
45	9	60	36	67.5	M20	15.5	12	24	M8 × 1	—	56	5	6,900	4,900	40
45	9	60	36	67.5	M20	15.5	12	24	M8 × 1	4	56	5	6,900	4,900	
50	9	70	36	79	M20	17.5	12	26	M8 × 1	—	54	5	10,000	7,200	50
50	9	70	36	79	M20	17.5	12	26	M8 × 1	5	54	5	10,000	7,200	

Linear Ball Bearing And Housing Units

KTN..B PP AS, KTNS..B PP AS SERIES

- Light Range
- Sealed, Greased, With Relubrication Facility

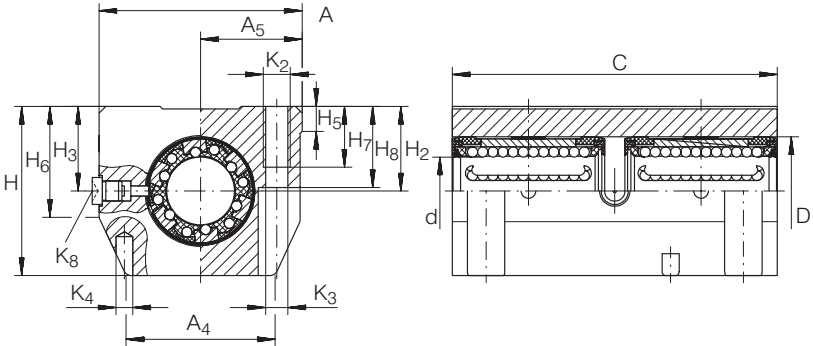


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm												
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS					
			d	A	C	H	A ₁	A ₄	A ₅ ± 0.01	C ₂ ¹⁾	C ₃ ¹⁾	D
12	KTN 12 B PP AS	0.21	12	43	70	35	32 ± 0.15	34	21.5	56 ± 0.15	24	22
	KTNS 12 B PP AS	0.21	12	43	70	35	32 ± 0.15	34	21.5	56 ± 0.15	24	22
16	KTN 16 B PP AS	0.35	16	53	78	42	40 ± 0.15	40	26.5	64 ± 0.15	26	26
	KTNS 16 B PP AS	0.35	16	53	78	42	40 ± 0.15	40	26.5	64 ± 0.15	26	26
20	KTN 20 B PP AS	0.56	20	60	96	50	45 ± 0.15	44	30	76 ± 0.15	33	32
	KTNS 20 B PP AS	0.56	20	60	96	50	45 ± 0.15	44	30	76 ± 0.15	33	32
25	KTN 25 B PP AS	1.15	25	78	122	60	60 ± 0.15	59.5	39	94 ± 0.2	44	40
	KTNS 25 B PP AS	1.15	25	78	122	60	60 ± 0.15	59.5	39	94 ± 0.2	44	40
30	KTN 30 B PP AS	1.7	30	87	142	70	68 ± 0.15	63	43.5	106 ± 0.2	54	47
	KTNS 30 B PP AS	1.7	30	87	142	70	68 ± 0.15	63	43.5	106 ± 0.2	54	47

- In the interim, linear ball bearing and housing units KTN..B PP AS and KTNS..B PP AS with profile grooves will still be supplied.
- 1) Dimension C₂, C₃ and lubrication hole centered on bearing width C.
 - 2) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
 - 3) Centring for dowel hole.
 - 4) Lubrication nipple.
 - 5) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.





KTNS..B PP AS

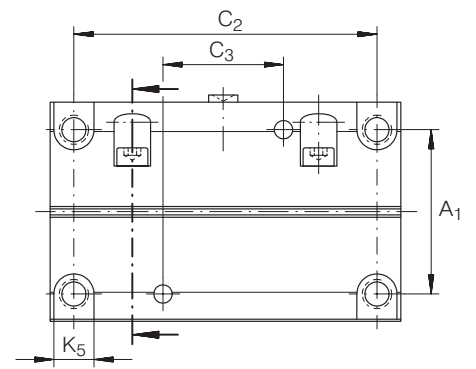


View X (rotated through 90°)

												BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
H ₂ +0.008 -0.016	H ₃	H ₅	H ₆	H ₇	H ₈	K ₂	K ₃ ²⁾	K ₄ ³⁾	K ₅ ²⁾	K ₈ ⁴⁾	A/F	NUMBER	dyn. C N	stat. C ₀ N	
18	18	6	25.6	11	16.5	M5	4.3	4	8	NIP A1	—	5	1,270	1,110	12
18	18	6	25.6	11	16.5	M5	4.3	4	8	NIP A1	2.5	5	1,270	1,110	12
22	22	7	28	13	21	M6	5.3	4	10	NIP A1	—	5	1,620	1,500	16
22	22	7	28	13	21	M6	5.3	4	10	NIP A1	3	5	1,620	1,500	16
25	25	7.5	33	18	24	M8	6.6	5	11	NIP A1	—	6	2,850	2,480	20
25	25	7.5	33	18	24	M8	6.6	5	11	NIP A1	4	6	2,850	2,480	20
30	30	8.5	40	22	29	M10	8.4	6	15	NIP A2	—	6	5,000	4,450	25
30	30	8.5	40	22	29	M10	8.4	6	15	NIP A2	5	6	5,000	4,450	25
35	35	9.5	44.5	22	34	M10	8.4	6	15	NIP A2	—	6	6,100	5,800	30
35	35	9.5	44.5	22	34	M10	8.4	6	15	NIP A2	5	6	6,100	5,800	30

Linear Ball Bearing And Housing Units

KTNO..PP AS, KTNOS..PP AS SERIES

- Light Range
- Sealed, Greased, With Relubrication Facility

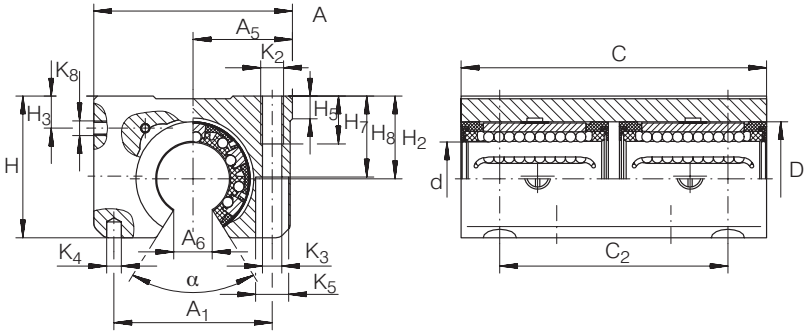


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm													
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS						
			d	A	C	H	A ₁	A ₅ ± 0.01	A ₆ ¹⁾	C ₂ ²⁾	C ₃ ²⁾	D	H ₂ +0.008 -0.016
12	KTNO 12 PP AS	0.19	12	43	70	28	32 ^{±0.15}	21.5	6.5	56 ^{±0.15}	24	22	18
	KTNOS 12 PP AS	0.19	12	43	70	28	32 ^{±0.15}	21.5	6.5	56 ^{±0.15}	24	22	18
16	KTNO 16 PP AS	0.31	16	53	78	35	40 ^{±0.15}	26.5	9	64 ^{±0.15}	26	26	22
	KTNOS 16 PP AS	0.31	16	53	78	35	40 ^{±0.15}	26.5	9	64 ^{±0.15}	26	26	22
20	KTNO 20 PP AS	0.52	20	60	96	42	45 ^{±0.15}	30	9	76 ^{±0.15}	33	32	25
	KTNOS 20 PP AS	0.52	20	60	96	42	45 ^{±0.15}	30	9	76 ^{±0.15}	33	32	25
25	KTNO 25 PP AS	1.06	25	78	122	51	60 ^{±0.15}	39	11.5	94 ^{±0.2}	44	40	30
	KTNOS 25 PP AS	1.06	25	78	122	51	60 ^{±0.15}	39	11.5	94 ^{±0.2}	44	40	30
30	KTNO 30 PP AS	1.55	30	87	142	60	68 ^{±0.15}	43.5	14	106 ^{±0.2}	54	47	35
	KTNOS 30 PP AS	1.55	30	87	142	60	68 ^{±0.15}	43.5	14	106 ^{±0.2}	54	47	35

- In the interim, linear ball bearing and housing units KTNO..PP AS and KTNOS..PP AS with profile grooves will still be supplied.
- 1) Dimension A₆ on diameter d.
 - 2) Dimension C₂, C₃ and lubrication hole centered on bearing width C.
 - 3) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
 - 4) Centring for dowel hole.
 - 5) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.





KT NOS..PP AS

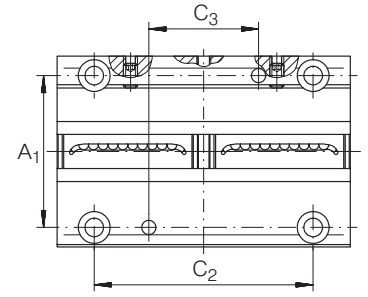

View X (rotated through 90°)

											BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
H ₃	H ₅	H ₇	H ₈	K ₂	K ₃ ³⁾	K ₄ ⁴⁾	K ₅ ³⁾	K ₆ ²⁾	A/F	α Grad	NUMBER	dyn. C N	stat. C ₀ N	
8	6	11	16.5	M5	4.3	4	8	M6	—	66	4	1,370	1,270	12
8	6	11	16.5	M5	4.3	4	8	M6	2.5	66	4	1,370	1,270	
10	7.5	13	21	M6	5.3	4	10	M6	—	68	4	1,620	1,500	16
10	7.5	13	21	M6	5.3	4	10	M6	2.5	68	4	1,620	1,500	
11	8	18	24	M8	6.6	5	11	M6	—	55	5	2,850	2,480	20
11	8	18	24	M8	6.6	5	11	M6	2.5	55	5	2,850	2,480	
12.5	9	22	29	M10	8.4	6	15	M8×1	—	57	5	5,100	4,550	25
12.5	9	22	29	M10	8.4	6	15	M8×1	3	57	5	5,100	4,550	
14	9.5	22	34	M10	8.4	6	15	M8×1	—	57	5	6,100	5,700	30
14	9.5	22	34	M10	8.4	6	15	M8×1	3	57	5	6,100	5,700	

Linear Ball Bearing And Housing Units

KTFN..PP AS SERIES


- Light Range
- Sealed, Greased, With Relubrication Facility

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm										
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS			
			d	A	C	H	A ₁ ± 0.15	C ₁	C ₃	C ₇
12	KTFN 12 PP AS	0.2	12	42	70	34	32	46	10	35
16	KTFN 16 PP AS	0.3	16	50	78	40	38	50	10	39
20	KTFN 20 PP AS	0.5	20	60	96	50	45	60	10	48
25	KTFN 25 PP AS	1	25	74	122	60	56	73	10	61
30	KTFN 30 PP AS	1.4	30	84	142	70	64	82	10	71

- ¹⁾ Recommended tolerance for housing bore: D₁ H7.
²⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



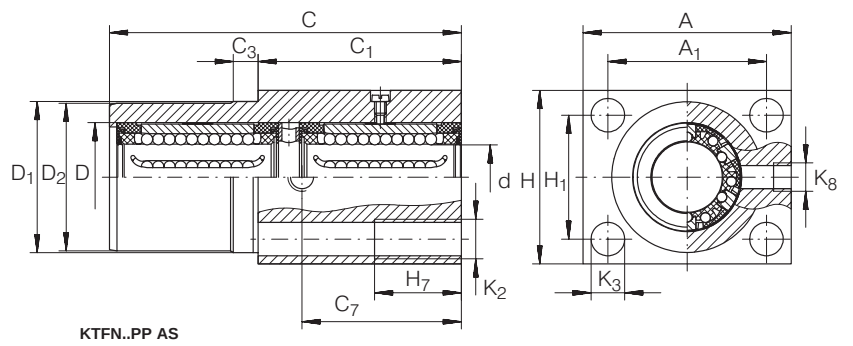


								BALL ROWS	BASIC LOAD RATINGS ²⁾		SHAFT DIAMETER
D	$D_1^{1)}$ g7	D_2 -0.1 -0.3	H_1 ± 0.15	H_7	K_2	K_3	K_8	NUMBER	dyn. C N	stat. C_0 N	
22	30	30	24	13	M6	5.3	M8 × 1	5	1,270	1,110	12
26	35	35	28	18	M8	6.6	M8 × 1	5	1,620	1,500	16
32	42	42	35	22	M10	8.4	M8 × 1	6	2,850	2,480	20
40	52	52	42	26	M12	10.5	M8 × 1	6	5,000	4,450	25
47	61	61	50	35	M16	13.5	M8 × 1	6	6,100	5,800	30

Linear Ball Bearings

KB, KBS, KBO SERIES

• Heavy Range

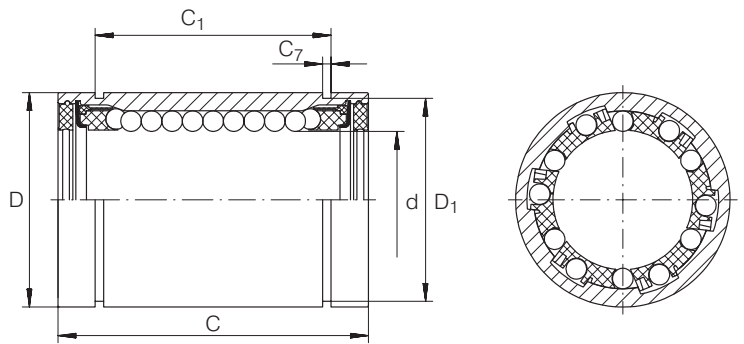

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm									
SHAFT DIAMETER	PART NUMBER			MASS kg	DIMENSIONS			MOUNTING DIMENSIONS	
					d Deviations ²⁾	D ²⁾ h5	C h12	A ₆ ³⁾	C ₁ H13
12	KB 1232	—	—	0.04	12 ^{+0.008} —	22	32	—	22.6
	—	KBS 1232	—	0.04		22	32	—	22.6
	—	—	KBO 1232	0.03		22	32	7.7	22.6
16	KB 1636	—	—	0.05	16 ^{+0.009} —0.001	26	36	—	24.6
	—	KBS 1636	—	0.05		26	36	—	24.6
	—	—	KBO 1636	0.04		26	36	10.1	24.6
20	KB 2045	—	—	0.09	20 ^{+0.009} —0.001	32	45	—	31.2
	—	KBS 2045	—	0.09		32	45	—	31.2
	—	—	KBO 2045	0.07		32	45	10	31.2
25	KB 2558	—	—	0.19	25 ^{+0.011} —0.001	40	58	—	43.7
	—	KBS 2558	—	0.19		40	58	—	43.7
	—	—	KBO 2558	0.15		40	58	12.5	43.7
30	KB 3068	—	—	0.3	30 ^{+0.011} —0.001	47	68	—	51.7
	—	KBS 3068	—	0.3		47	68	—	51.7
	—	—	KBO 3068	0.24		47	68	13.6	51.7
40	KB 4080	—	—	0.6	40 ^{+0.013} —0.002	62	80	—	60.3
	—	KBS 4080	—	0.6		62	80	—	60.3
	—	—	KBO 4080	0.52		62	80	18.2	60.3
50	KB 50100	—	—	1	50 ^{+0.013} —0.002	75	100	—	77.3
	—	KBS 50100	—	1		75	100	—	77.3
	—	—	KBO 50100	0.85		75	100	22.7	77.3

¹⁾ Linear ball bearings sealed on both sides: suffix "PP".
Linear ball bearings with relubrication facility: suffix "AS".

²⁾ The tolerances are valid for series KB.


³⁾ Dimension A₆ on diameter d.

⁴⁾ Groove dimensions suitable for circlips to DIN 471.


⁵⁾ Bore position centered on bearing width C.

⁶⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.


⁷⁾ Basic load rating in main load direction.



KB..PP AS



KBS..AS, KBS..PP AS




KBO..AS, KBO..PP AS

								BALL ROWS	BASIC LOAD RATINGS ⁶⁾				SHAFT DIAMETER
C ₇ ⁴⁾	C ₈	D ₁ ⁴⁾	H ₉	K ₄ ⁵⁾	K ₈	α	β	NUMBER	dyn. C _{0 min} N	stat. C _{0 min} N	dyn. C _{0 max} N	stat. C _{0 max} N	
1.3	–	21	–	–	1.5	–	–	5	540	385	640	570	12
1.3	1	21	–	–	1.5	–	–	5	540	385	640	570	
1.3	–	21	1.2	2.2	1.5	78	64	4	–	–	600 ⁷⁾	445 ⁷⁾	
1.3	–	24.9	–	–	2	–	–	5	710	530	840	780	
1.3	1	24.9	–	–	2	–	–	5	710	530	840	780	
1.3	–	24.9	1.2	2.2	2	78	64	4	–	–	800 ⁷⁾	620 ⁷⁾	
1.6	–	30.3	–	–	2	–	–	6	1,570	1,230	1,660	1,570	20
1.6	1	30.3	–	–	2	–	–	6	1,570	1,230	1,660	1,570	
1.6	–	30.3	1.2	2.2	2	60	52	5	–	–	1,600 ⁷⁾	1,280 ⁷⁾	
1.85	–	37.5	–	–	2.5	–	–	6	2,800	2,220	2,950	2,850	
1.85	1	37.5	–	–	2.5	–	–	6	2,800	2,220	2,950	2,850	
1.85	–	37.5	1.5	3	2.5	60	53	5	–	–	2,850 ⁷⁾	2,330 ⁷⁾	
1.85	–	44.5	–	–	2.5	–	–	6	3,600	2,850	3,800	3,600	30
1.85	1	44.5	–	–	2.5	–	–	6	3,600	2,850	3,800	3,600	
1.85	–	44.5	1.5	3	2.5	54	55	5	–	–	3,700 ⁷⁾	3,000 ⁷⁾	
2.15	–	59	–	–	3	–	–	6	6,000	4,400	6,400	5,600	
2.15	1	59	–	–	3	–	–	6	6,000	4,400	6,400	5,600	
2.15	–	59	1.5	3	3	54	54	5	–	–	6,100 ⁷⁾	4,600 ⁷⁾	
2.65	–	72	–	–	4	–	–	6	8,700	6,300	9,200	8,000	50
2.65	1	72	–	–	4	–	–	6	8,700	6,300	9,200	8,000	
2.65	–	72	1.5	3	4	54	54	5	–	–	8,900 ⁷⁾	6,600 ⁷⁾	

Linear Ball Bearing And Housing Units

KGB..PP AS, KGBS..PP AS, KGBO..PP AS SERIES

- Heavy Range
- Sealed, Greased, With Relubrication Facility

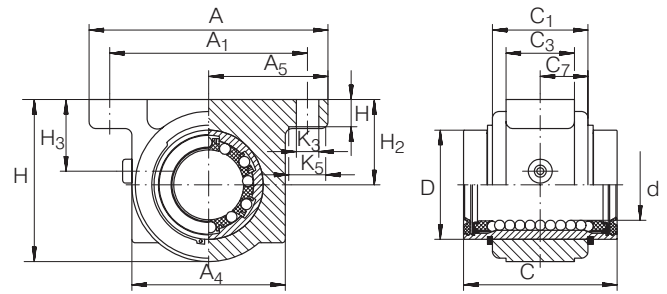

KGB..PP AS

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm											
SHAFT DIAMETER	PART NUMBER			MASS	DIMENSIONS				MOUNTING DIMENSIONS		
					d Deviations ¹⁾	A	C h12	H	A ₁	A ₄	A ₅
12	KGB 1232 PP AS	—	—	0.1	12 ^{+0.008}	52	32	35.8	42 ^{±0.15}	31.6	26 ^{±0.02}
16	—	KGBS 1232 PP AS	—	0.1		52	32	35.8	42 ^{±0.15}	31.6	26 ^{±0.02}
	—	—	KGBO 1232 PP AS	0.09		52	32	—	42 ^{±0.15}	31.6	26 ^{±0.02}
	KGB 1636 PP AS	—	—	0.14	56	36	37.5	46 ^{±0.15}	35	28 ^{±0.02}	
	—	KGBS 1636 PP AS	—	0.14	56	36	37.5	46 ^{±0.15}	35	28 ^{±0.02}	
	—	—	KGBO 1636 PP AS	0.12	56	36	—	46 ^{±0.15}	35	28 ^{±0.02}	
20	KGB 2045 PP AS	—	—	0.3	20 ^{+0.009} -0.001	70	45	48	58 ^{±0.15}	46	35 ^{±0.02}
25	—	KGBS 2045 PP AS	—	0.3		70	45	48	58 ^{±0.15}	46	35 ^{±0.02}
	—	—	KGBO 2045 PP AS	0.25		70	45	—	58 ^{±0.15}	46	35 ^{±0.02}
	KGB 2558 PP AS	—	—	0.58	80	58	58	68 ^{±0.15}	56	40 ^{±0.02}	
	—	KGBS 2558 PP AS	—	0.58	80	58	58	68 ^{±0.15}	56	40 ^{±0.02}	
	—	—	KGBO 2558 PP AS	0.49	80	58	—	68 ^{±0.15}	56	40 ^{±0.02}	
30	KGB 3068 PP AS	—	—	0.9	30 ^{+0.011} -0.001	88	68	67	76 ^{±0.2}	64	44 ^{±0.02}
40	—	KGBS 3068 PP AS	—	0.9		88	68	67	76 ^{±0.2}	64	44 ^{±0.02}
	—	—	KGBO 3068 PP AS	0.78		88	68	—	76 ^{±0.2}	64	44 ^{±0.02}
	KGB 4080 PP AS	—	—	1.43	108	80	83.5	94 ^{±0.2}	77	54 ^{±0.02}	
	—	KGBS 4080 PP AS	—	1.43	108	80	83.5	94 ^{±0.2}	77	54 ^{±0.02}	
	—	—	KGBO 4080 PP AS	1.28	108	80	—	94 ^{±0.2}	77	54 ^{±0.02}	
50	KGB 50100 PP AS	—	—	2.78	50 ^{+0.013} -0.002	135	100	98	116 ^{±0.2}	96	67.5 ^{±0.05}
—	KGBS 50100 PP AS	—	2.78	135		100	98	116 ^{±0.2}	96	67.5 ^{±0.05}	
—	—	KGBO 50100 PP AS	2.46	135		100	—	116 ^{±0.2}	96	67.5 ^{±0.05}	

¹⁾ The tolerances are valid for series KGB..PP AS only.


²⁾ Dimension A₆ on diameter d.

³⁾ For fixing screws to DIN 912-8.8 and spring washer to DIN 7980.


⁵⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



KGBO..PP AS

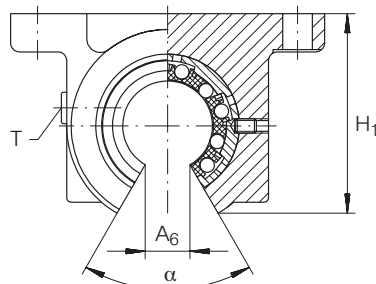

KGBO, KGBO..PP AS




KGBS, KGBS..PP AS

													INA LUBRICATION NIPPLE ⁴⁾ T	BALL ROWS	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
A ₆ ²⁾	C ₁	C ₃	C ₇	D ₁ ¹⁾ h5	H ₁	H ₂ ± 0.015	H ₃	H ₈	K ₃ ³⁾	K ₅ ³⁾	α Grad	A/F		NUMBER	dyn. C N	stat. C ₀ N	
–	20	12	10	22	–	20	15	6	5.5	10	–	–	NIP A1	5	540	385	12
–	20	12	10	22	–	20	15	6	5.5	10	–	2	NIP A1	5	540	385	12
7.7	20	12	7	22	32	20	15	6	5.5	10	78	–	NIP A1	4	600	445	16
–	22	15	11	26	–	20	15	6	5.5	10	–	–	NIP A1	5	710	530	
–	22	15	11	26	–	20	15	6	5.5	10	–	2	NIP A1	5	710	530	
10.1	22	15	7	26	33.5	20	15	6	5.5	10	78	–	NIP A1	4	800	620	
–	28	20	14	32	–	25	21	8	6.6	11	–	–	NIP A1	6	1,570	1,230	20
–	28	20	14	32	–	25	21	8	6.6	11	–	3	NIP A1	6	1,570	1,230	25
10	28	20	10	32	45	25	21	8	6.6	11	60	–	NIP A1	5	1,600	1,280	
–	40	28	20	40	–	30	23	10	6.6	11	–	–	NIP A1	6	2,800	2,220	
–	40	28	20	40	–	30	23	10	6.6	11	–	3	NIP A1	6	2,800	2,220	
12.5	40	28	15	40	54.5	30	23	10	6.6	11	60	–	NIP A1	5	2,850	2,330	30
–	48	32	24	47	–	35	25	10	6.6	11	–	–	NIP A2	6	3,600	2,850	
–	48	32	24	47	–	35	25	10	6.6	11	–	4	NIP A2	6	3,600	2,850	
13.6	48	32	19	47	63.5	35	25	10	6.6	11	54	–	NIP A2	5	3,700	3,000	
–	56	40	28	62	–	45	30	12	9	15	–	–	NIP A2	6	6,000	4,400	40
–	56	40	28	62	–	45	30	12	9	15	–	4	NIP A2	6	6,000	4,400	
18.2	56	40	23	62	79.5	45	30	12	9	15	54	–	NIP A2	5	6,100	4,600	
–	72	52	36	75	–	50	34	14	11	18	–	–	NIP A2	6	8,700	6,300	50
–	72	52	36	75	–	50	34	14	11	18	–	5	NIP A2	6	8,700	6,300	
22.7	72	52	28	75	93	50	34	14	11	18	54	–	NIP A2	5	8,900	6,600	

Linear Ball Bearing And Housing Units

KGBA..PP AS, KGBAS..PP AS, KGBAO..PP AS SERIES

- Heavy Range
- Sealed, Greased, With Relubrication Facility

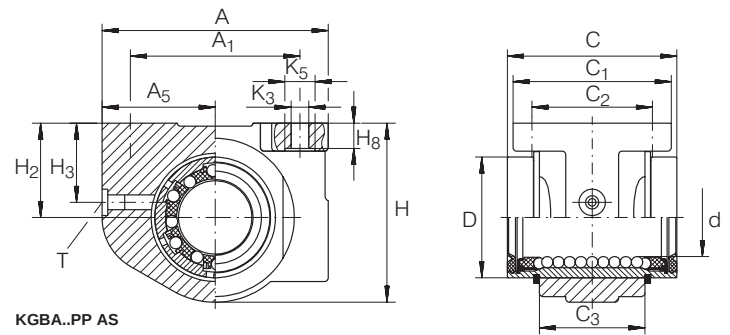

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm										
SHAFT DIAMETER	PART NUMBER			MASS kg	DIMENSIONS				MOUNTING DIMENSIONS	
					d Deviations ¹⁾	A	C h12	H	A ₁	A ₅
12	KGBA 1232 PP AS	—	—	0.08	12 ^{+0.008}	42	32	34	32 ^{±0.15}	21 ^{±0.01}
16	—	KGBAS 1232 PP AS	—	0.08		42	32	34	32 ^{±0.15}	21 ^{±0.01}
	—	—	KGBAO 1232 PP AS	0.07		42	32	—	32 ^{±0.15}	21 ^{±0.01}
	KGBA 1636 PP AS	—	—	0.12	16 ^{+0.009 -0.001}	50	36	41	40 ^{±0.15}	25 ^{±0.01}
	—	KGBAS 1636 PP AS	—	0.12		50	36	41	40 ^{±0.15}	25 ^{±0.01}
	—	—	KGBAO 1636 PP AS	0.1		50	36	—	40 ^{±0.15}	25 ^{±0.01}
20	KGBA 2045 PP AS	—	—	0.2	20 ^{+0.009 -0.001}	60	45	47.5	45 ^{±0.15}	30 ^{±0.01}
25	—	KGBAS 2045 PP AS	—	0.2		60	45	47.5	45 ^{±0.15}	30 ^{±0.01}
	—	—	KGBAO 2045 PP AS	0.17		60	45	—	45 ^{±0.15}	30 ^{±0.01}
	KGBA 2558 PP AS	—	—	0.41	25 ^{+0.011 -0.001}	74	58	60	60 ^{±0.2}	37 ^{±0.01}
	—	KGBAS 2558 PP AS	—	0.41		74	58	60	60 ^{±0.2}	37 ^{±0.01}
	—	—	KGBAO 2558 PP AS	0.35		74	58	—	60 ^{±0.2}	37 ^{±0.01}
30	KGBA 3068 PP AS	—	—	0.61	30 ^{+0.011 -0.001}	84	68	67	68 ^{±0.2}	42 ^{±0.01}
40	—	KGBAS 3068 PP AS	—	0.61		84	68	67	68 ^{±0.2}	42 ^{±0.01}
	—	—	KGBAO 3068 PP AS	0.53		84	68	—	68 ^{±0.2}	42 ^{±0.01}
	KGBA 4080 PP AS	—	—	1.2	40 ^{+0.013 -0.002}	108	80	87	86 ^{±0.2}	54 ^{±0.015}
	—	KGBAS 4080 PP AS	—	1.2		108	80	87	86 ^{±0.2}	54 ^{±0.015}
	—	—	KGBAO 4080 PP AS	1.07		108	80	—	86 ^{±0.2}	54 ^{±0.015}
50	KGBA 50100 PP AS	—	—	1.88	50 ^{+0.013 -0.002}	130	100	98	108 ^{±0.2}	65 ^{±0.015}
—	KGBAS 50100 PP AS	—	1.88	130		100	98	108 ^{±0.2}	65 ^{±0.015}	
—	—	KGBAO 50100 PP AS	1.65	130		100	—	108 ^{±0.2}	65 ^{±0.015}	

¹⁾ The tolerances are valid for series KGBA..PP AS only.


²⁾ Dimension A₆ on diameter d.

³⁾ For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.


⁵⁾ The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways.



KGBAS..PP AS

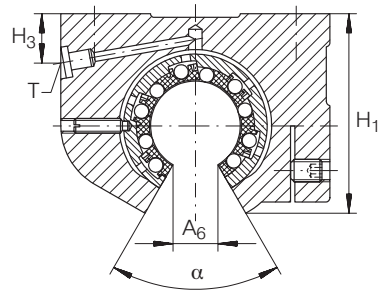

KGBAO..PP AS




KGBAO..PP AS

A ₆ ²⁾	C ₁	C ₂	C ₃	D ₁ ¹⁾ h5	H ₁	H ₂ ¹⁾	H ₃	H ₈	K ₃ ³⁾	K ₅ ³⁾	α	A/F	A/F ₁	INA LUBRICATION NIPPLE T	BALL ROWS NUMBER	BASIC LOAD RATINGS ⁵⁾		SHAFT DIAMETER
																dyn. C N	stat. C ₀ N	
—	32	23 ^{±0.15}	20	22	—	18 ^{±0.01}	15	4.8	4.7	8	—	—	—	NIP A1	5	540	385	12
—	32	23 ^{±0.15}	20	22	—	18 ^{±0.01}	15	4.8	4.7	8	—	7	—	NIP A1	5	540	385	12
7.7	32	23 ^{±0.15}	20	22	30.5	18 ^{±0.01}	7.8	4.8	4.7	8	78	—	2	NIP A1	4	600	445	16
—	35	26 ^{±0.15}	22	26	—	22 ^{±0.01}	15	5.4	4.7	8	—	—	—	NIP A1	5	710	530	16
—	35	26 ^{±0.15}	22	26	—	22 ^{±0.01}	15	5.4	4.7	8	—	7	—	NIP A1	5	710	530	16
10.1	35	26 ^{±0.15}	22	26	37	22 ^{±0.01}	10	5.4	4.7	8	78	—	2.5	NIP A1	4	800	620	16
—	42	32 ^{±0.15}	28	32	—	25 ^{±0.01}	21	6.7	4.7	8	—	—	—	NIP A1	6	1,570	1,230	20
—	42	32 ^{±0.15}	28	32	—	25 ^{±0.01}	21	6.7	4.7	8	—	7	—	NIP A1	6	1,570	1,230	20
10	42	32 ^{±0.15}	28	32	44.5	25 ^{±0.01}	11	6.7	4.7	8	60	—	2.5	NIP A1	5	1,600	1,280	25
—	54	40 ^{±0.2}	40	40	—	30 ^{±0.01}	23	7.8	5.7	10	—	—	—	NIP A1	6	2,800	2,220	25
—	54	40 ^{±0.2}	40	40	—	30 ^{±0.01}	23	7.8	5.7	10	—	8	—	NIP A1	6	2,800	2,220	25
12.5	54	40 ^{±0.2}	40	40	56	30 ^{±0.01}	13	7.8	5.7	10	60	—	3	NIP A1	5	2,850	2,330	25
—	60	45 ^{±0.2}	48	47	—	35 ^{±0.01}	25	8.7	6.8	11	—	—	—	NIP A2	6	3,600	2,850	30
—	60	45 ^{±0.2}	48	47	—	35 ^{±0.01}	25	8.7	6.8	11	—	10	—	NIP A2	6	3,600	2,850	30
13.6	60	45 ^{±0.2}	48	47	63.5	35 ^{±0.01}	14	8.7	6.8	11	54	—	3	NIP A2	5	3,700	3,000	40
—	78	58 ^{±0.2}	56	62	—	45 ^{±0.01}	30	11	9.2	15	—	—	—	NIP A2	6	6,000	4,400	40
—	78	58 ^{±0.2}	56	62	—	45 ^{±0.01}	30	11	9.2	15	—	13	—	NIP A2	6	6,000	4,400	40
18.2	78	58 ^{±0.2}	56	62	82.5	45 ^{±0.01}	18	11	9.2	15	54	—	4	NIP A2	5	6,100	4,600	40
—	70	50 ^{±0.2}	72	75	—	50 ^{±0.015}	34	12.5	9.2	15	—	—	—	NIP A2	6	8,700	6,300	50
—	70	50 ^{±0.2}	72	75	—	50 ^{±0.015}	34	12.5	9.2	15	—	13	—	NIP A2	6	8,700	6,300	50
22.7	70	50 ^{±0.2}	72	75	93	50 ^{±0.015}	19	12.5	9.2	15	54	—	4	NIP A2	5	8,900	6,600	50

Linear Ball Bearing And Housing Units

KTB..B PP AS, KTBO..PP AS SERIES

- Heavy Range
- Sealed, Greased, With Relubrication Facility


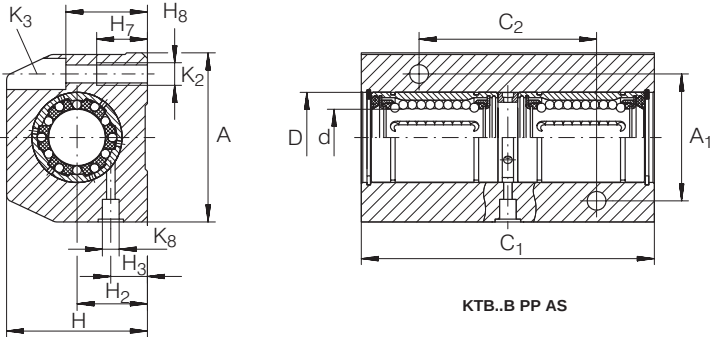


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm											
SHAFT DIAMETER	PART NUMBER		MASS kg	DIMENSIONS			MOUNTING DIMENSIONS				
				d Deviations ¹⁾	A	H	A ₁	A ₆ ²⁾	C ₁	C ₂	D
12	KTB 12 B PP AS	–	0.31	12 ^{+0.008}	43	35	30 ^{±0.15}	–	76	40 ^{±0.15}	22
	–	KTBO 12 PP AS	0.26		42	30	30 ^{±0.15}	7.7	76	40 ^{±0.15}	22
16	KTB 16 B PP AS	–	0.46	16 ^{+0.009 –0.001}	53	42	36 ^{±0.15}	–	84	45 ^{±0.15}	26
	–	KTBO 16 PP AS	0.36		50	35	36 ^{±0.15}	10.1	84	45 ^{±0.15}	26
20	KTB 20 B PP AS	–	0.8	20 ^{+0.009 –0.001}	60	50	45 ^{±0.15}	–	104	55 ^{±0.15}	32
	–	KTBO 20 PP AS	0.62		60	42	45 ^{±0.15}	10	104	55 ^{±0.15}	32
25	KTB 25 B PP AS	–	1.49	25 ^{+0.011 –0.001}	78	60	54 ^{±0.15}	–	130	70 ^{±0.2}	40
	–	KTBO 25 PP AS	1.18		74	51	54 ^{±0.15}	12.5	130	70 ^{±0.2}	40
30	KTB 30 B PP AS	–	2.3	30 ^{+0.011 –0.001}	87	70	62 ^{±0.15}	–	152	85 ^{±0.2}	47
	–	KTBO 30 PP AS	1.84		84	60	62 ^{±0.15}	13.6	152	85 ^{±0.2}	47

1) The tolerances are valid for series KTB..B PP AS only.
2) Dimension A₆ on diameter d.
3) The basic load ratings are only valid for hardened (670 to 840 HV) and ground shaft raceways and uniform loading on both the linear ball bearings.



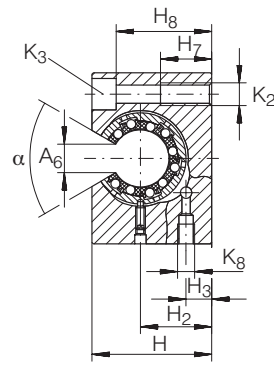


KTBO..PP AS

							K ₃ FOR FIXING SCREWS		BASIC LOAD RATINGS ³⁾		SHAFT DIAMETER
H ₂ ± 0.015	H ₃	H ₇	H ₈	K ₂	K ₈	α Grad	DIN 912	DIN 6 912	dyn. C N	stat. C ₀ N	
18	10	13	28	M6	NIP A1	—	M5	—	880	770	12
18	6	13	24.5	M6	M6	78	—	M5	980	890	16
22	12	13	35	M6	NIP A1	—	M5	—	1,150	1,060	
22	8	13	29.5	M6	M6	78	—	M5	1,290	1,240	
25	13	18	37	M8	NIP A1	—	M6	—	2,550	2,450	20
25	9	18	35.5	M8	M6	60	—	M6	2,600	2,550	25
30	15	22	49	M10	NIP A2	—	M8	—	4,550	4,450	
30	9	22	43	M10	M8 × 1	60	—	M8	4,650	4,650	
35	16	26	52	M12	NIP A2	—	M10	—	5,900	5,700	30
35	11	26	50.5	M12	M8 × 1	54	—	M10	6,000	6,000	

Permaglide® Linear Plain Bearings

PAB..PP AS, PABO..PP AS SERIES

- Plain Bearing Range
- Sealed, Greased, With Relubrication Facility

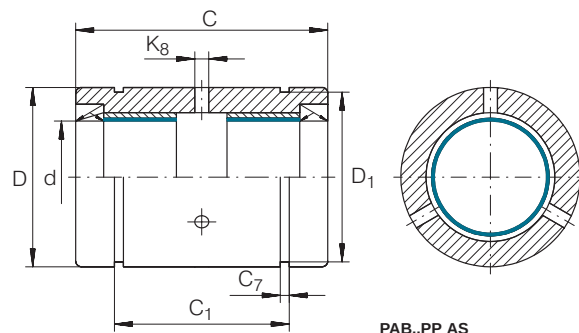

PAB..PP AS

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm						
SHAFT DIAMETER	PART NUMBER		MASS kg	DIMENSIONS		
				d	D ¹⁾ h7	C h12
12	PAB 1232 PP AS	PABO 1232 PP AS	0.026	12	22	32
16	PAB 1636 PP AS		0.021	12	22	32
			0.034	16	26	36
		PABO 1636 PP AS	0.028	16	26	36
20	PAB 2045 PP AS	PABO 2045 PP AS	0.068	20	32	45
25	PAB 2558 PP AS		0.058	20	32	45
			0.132	25	40	58
		PABO 2558 PP AS	0.113	25	40	58
30	PAB 3068 PP AS	PABO 3068 PP AS	0.169	30	47	68
40	PAB 4080 PP AS		0.143	30	47	68
			0.426	40	62	80
		PABO 4080 PP AS	0.362	40	62	80
50	PAB 50100 PP AS	PABO 50100 PP AS	0.773	50	75	100
			0.657	50	75	100


¹⁾ The tolerances are valid for series PAB..PP AS only.

²⁾ Bores and grooves centered on bearing width C.

³⁾ Groove dimensions suitable for circlips to DIN 471.

⁴⁾ Dimension A₆ on diameter d.

⁵⁾ The basic static load ratings stated here are not valid if the above elements are fitted in housings – as shown on the following pages.

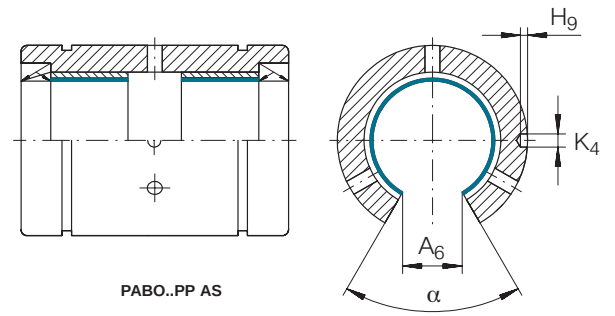


MOUNTING DIMENSIONS								BASIC LOAD RATINGS ⁵⁾	SHAFT DIAMETER
C ₁ ²⁾ H13	C ₇ ³⁾ H13	D ₁	A ₆ ⁴⁾	H ₉	K ₄ ³⁾	K ₈ ³⁾ H13	α Grad	stat. C ₀ N	
22.6	1.3	21	—	—	—	2.5	—	60,000	12
22.6	1.3	21	7.7	1.2	2.2	2.5	78	60,000	
24.6	1.3	24.9	—	—	—	2.5	—	96,000	16
24.6	1.3	24.9	10.1	1.2	2.2	2.5	78	96,000	
31.2	1.6	30.3	—	—	—	2.5	—	150,000	20
31.2	1.6	30.3	10	1.2	2.2	2.5	60	150,000	
43.7	1.85	37.5	—	—	—	2.5	—	250,000	25
43.7	1.85	37.5	12.5	1.5	3	2.5	60	250,000	
51.7	1.85	44.5	—	—	—	3	—	375,000	30
51.7	1.85	44.5	13.6	1.5	3	3	54	375 000	
60.3	2.15	59	—	—	—	3	—	600,000	40
60.3	2.15	59	18.2	1.5	3	3	54	600,000	
77.3	2.65	72	—	—	—	4	—	1,000,000	50
77.3	2.65	72	22.7	1.5	3	4	54	1,000,000	

Permaglide® Linear Plain Bearing Units

PAGBA..PP AS, PAGBAO..PP AS SERIES

- Plain Bearing Range
- Sealed, Greased, With Relubrication Facility

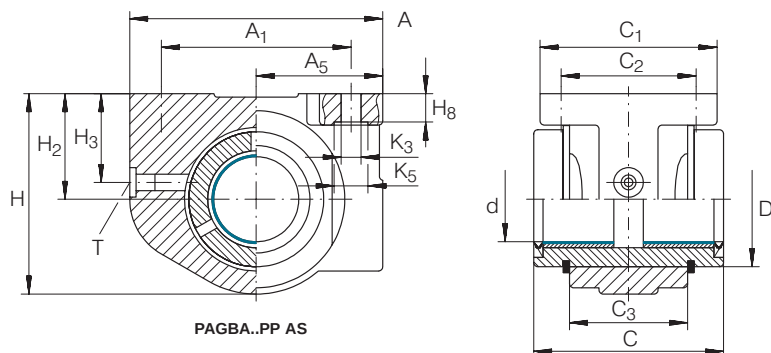

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm

SHAFT DIAMETER	PART NUMBER		MASS kg	DIMENSIONS				MOUNTING DIMENSIONS		
				d	A	C h12	H	A ₁	A ₅	A ₆ ¹⁾
12	PAGBA 1232 PP AS	—	0.07	12	42	32	34	32 ^{±0.15}	21 ^{±0.01}	—
	—	PAGBAO 1232 PP AS	0.06	12	42	32	—	32 ^{±0.15}	21	7.7
16	PAGBA 1636 PP AS	—	0.1	16	50	36	41	40 ^{±0.15}	25 ^{±0.01}	—
	—	PAGBAO 1636 PP AS	0.09	16	50	36	—	40 ^{±0.15}	25	10.1
20	PAGBA 2045 PP AS	—	0.18	20	60	45	47.5	45 ^{±0.15}	30 ^{±0.01}	—
	—	PAGBAO 2045 PP AS	0.16	20	60	45	—	45 ^{±0.15}	30	10
25	PAGBA 2558 PP AS	—	0.35	25	74	58	60	60 ^{±0.2}	37 ^{±0.01}	—
	—	PAGBAO 2558 PP AS	0.31	25	74	58	—	60 ^{±0.2}	37	12.5
30	PAGBA 3068 PP AS	—	0.48	30	84	68	67	68 ^{±0.2}	42 ^{±0.01}	—
	—	PAGBAO 3068 PP AS	0.43	30	84	68	—	68 ^{±0.2}	42	13.6
40	PAGBA 4080 PP AS	—	1.07	40	108	80	87	86 ^{±0.2}	54 ^{±0.015}	—
	—	PAGBAO 4080 PP AS	0.91	40	108	80	—	86 ^{±0.2}	54	18.2
50	PAGBA 50100 PP AS	—	1.65	50	130	100	98	108 ^{±0.2}	65 ^{±0.015}	—
	—	PAGBAO 50100 PP AS	1.46	50	130	100	—	108 ^{±0.2}	65	22.7

¹⁾ Dimension A₆ on diameter d.


²⁾ The tolerances are valid for series PAGBA..PP AS only.

³⁾ For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.

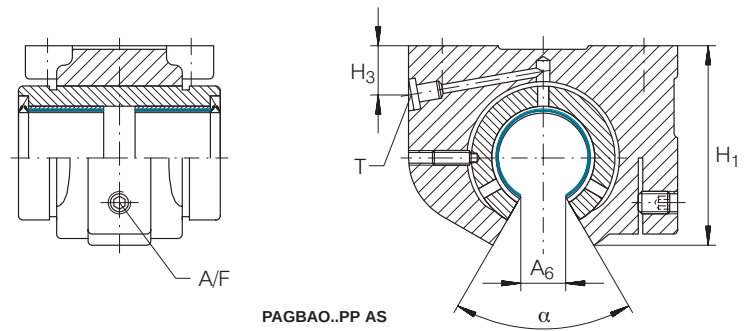

												INA LUBRICATION NIPPLE ⁴⁾	SHAFT DIAMETER
C ₁	C ₂	C ₃	D ₂ ²⁾ h7	H ₁	H ₂	H ₃	H ₈ -0.5	K ₃ ³⁾	K ₅ ³⁾	A/F	α Grad	T	
32	23 ^{±0.15}	20	22	—	18 ^{±0.01}	15	4.8	4.7	8	—	—	NIP A1	12
32	23 ^{±0.15}	20	22	30.5	18	7.8	4.8	4.7	8	2	78	NIP A1	
35	26 ^{±0.15}	22	26	—	22 ^{±0.01}	15	5.4	4.7	8	—	—	NIP A1	16
35	26 ^{±0.15}	22	26	36.8	22	10	5.4	4.7	8	2.5	78	NIP A1	
42	32 ^{±0.15}	28	32	—	25 ^{±0.01}	21	6.7	4.7	8	—	—	NIP A1	20
42	32 ^{±0.15}	28	32	44.5	25	11	6.7	4.7	8	2.5	60	NIP A1	
54	40 ^{±0.2}	40	40	—	30 ^{±0.01}	23	7.8	5.7	10	—	—	NIP A1	25
54	40 ^{±0.2}	40	40	56	30	13	7.8	5.7	10	3	60	NIP A1	
60	45 ^{±0.2}	48	47	—	35 ^{±0.01}	25	8.7	6.8	11	—	—	NIP A2	30
60	45 ^{±0.2}	48	47	63.5	35	14	8.7	6.8	11	3	54	NIP A2	
78	58 ^{±0.2}	56	62	—	45 ^{±0.01}	30	11	9.2	15	—	—	NIP A2	40
78	58 ^{±0.2}	56	62	82.4	45	18	11	9.2	15	4	54	NIP A2	
70	50 ^{±0.2}	72	75	—	50 ^{±0.015}	34	12.5	9.2	15	—	—	NIP A2	50
70	50 ^{±0.2}	72	75	92.8	50	19	12.5	9.2	15	4	54	NIP A2	

Shafts W SERIES

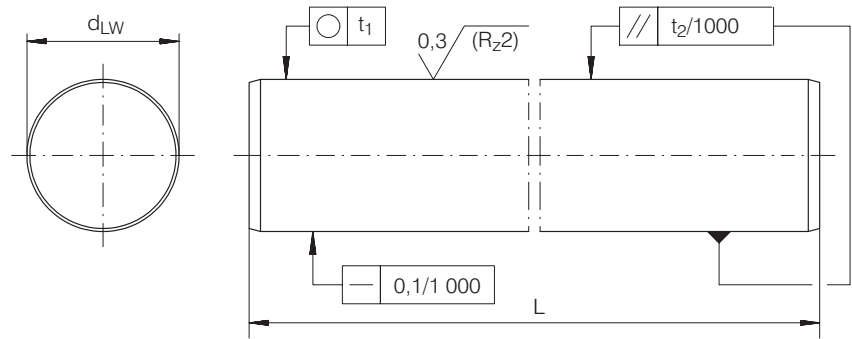

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm									
SHAFT DIAMETER d _{LW}	PART NUMBER	MASS kg/m	LENGTH L _{max}	TOLERANCES IN μm			ROUNDNESS t ₁ μm	PARALLELISM t ₂ ²⁾ μm	SURFACE HARDNESS DEPTH RHT ³⁾ min.
				STANDARD TOLERANCE h6	SPECIAL TOLERANCES ¹⁾				
					j5	f7			
5	W 5	0.15	3,600	0–8	–	–	4	5	0.4
6	W 6	0.22	4,000	0–8	–	–	4	5	0.4
8	W 8	0.39	4,000	0–9	–	–	4	6	0.4
10	W 10	0.61	6,000	0–9	–	–	4	6	0.4
12	W 12	0.89	6,000	0–11	+5–3	–16–34	5	8	0.6
14	W 14	1.21	6,000	0–11	+5–3	–16–34	5	8	0.6
15	W 15	1.37	6,000	0–11	–	–16–34	5	8	0.6
16	W 16	1.57	6,000	0–11	+5–3	–16–34	5	8	0.6
18	W 18	1.98	6,000	0–11	–	–16–34	5	8	0.6
20	W 20	2.45	6,000	0–13	+5–4	–20–41	6	9	0.9
24	W 24	3.55	6,000	0–13	–	–	6	9	0.9
25	W 25	3.83	6,000	0–13	+5–4	–20–41	6	9	0.9
30	W 30	5.51	6,000	0–13	+5–4	–20–41	6	9	0.9
32	W 32	6.3	6,000	0–16	–	–25–50	7	11	1.5
40	W 40	9.8	6,000	0–16	+6–5	–	7	11	1.5
50	W 50	15.3	6,000	0–16	+6–5	–	7	11	1.5
60	W 60	22.1	6,000	0–19	–	–	8	13	2.2
80	W 80	39.2	6,000	0–19	–	–	8	13	2.2

¹⁾ Only for shafts made from quenched and tempered steel.

²⁾ Measured diameter variation.

³⁾ According to DIN 6 773, Part 3.

Recommended Threaded Holes

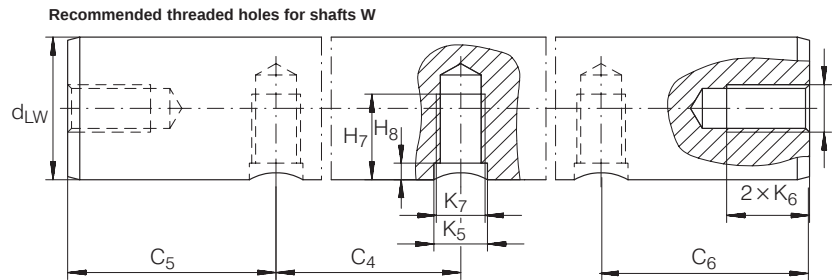


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																																																																				
PART NUMBER ¹⁾	AXIAL THREAD									RADIAL THREAD																																																										
										DIMENSIONS																																																										
	K ₆										C ₄			C _{5min} , C _{6min} ²⁾ HOLE PATTERN		H ₇	H ₈	K ₅	K ₇																																																	
03														04–05																																																						
W 5	M3 M3	M4	M5	M6							75		120	10	3 x K ₆ + K ₇	8	2	5	M4																																																	
W 6																																																																				
W 8																																																																				
W 10																																																																				
W 12																																																																				
W 14	M4	M5	M6																																																																	
W 15			M5	M6	M8	M10					75	100	150	10		9	2,5	6	M5																																																	
W 16																				M6	M8	M10																																														
W 18																																																																				
W 20																																																																				
W 24															M6																					M8	M10	M12																														
W 25					M8	M10	M12				75	120	150	15	11	3	7	M6																																																		
W 30																							M10	M12	M16				100	150	200	20	15	3	7	M8																																
																																					M10	M12	M16																													
																																																					M10	M12	M16													
																																																																				M10
W 32						M10	M12	M16			150	200	300	20	19	4	11	M10																																																		
W 40																			M10	M12	M16																																															
W 50																																								M12	M16	M20			100	200	300	20	21	4	13	M12																
																																																					M12	M16	M20	M24												
W 60							M12	M16	M20	M24				20	25	4	15																																																			
W 80																																																																				

²⁾ The dimensions C₅ and C₆ are dependent on the length of the shaft.


The axial threaded holes should be taken into consideration when using hole patterns 04 and 05.

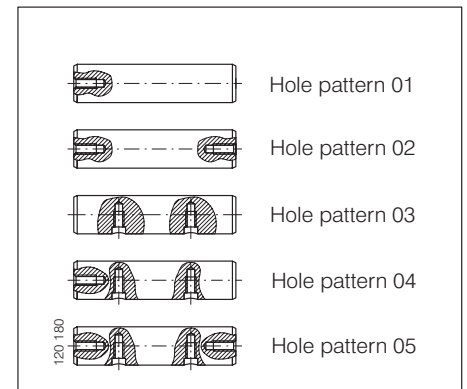

Shafts

WH SERIES

- Hollow shafts

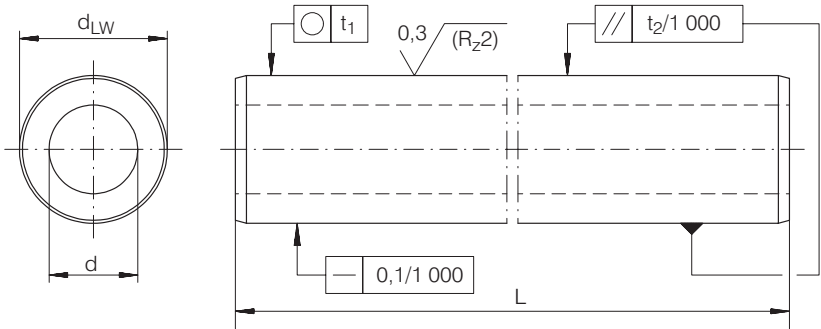


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm								
SHAFT DIAMETER d_{LW}	PART NUMBER	MASS kg/m	Length L	INSIDE DIAMETER $d^1)$	TOLERANCES IN MM D $h7$	ROUNDNESS t_1 μm	PARALLELISM $t_2^2)$ μm	SURFACE HARDNESS DEPTH $R_{ht}^3)$ min.
20	WH 20	1.25	6,000	14	0-21	6	9	0.9
25	WH 25	2.35	6,000	15.6	0-21	6	9	0.9
30	WH 30	3.5	6,000	18.2	0-21	6	9	0.9
40	WH 40	4.99	6,000	28.1	0-25	7	11	1.5
50	WH 50	9.97	6,000	29.7	0-25	7	11	1.5
60	WH 60	14.2	6,000	36	0-30	8	13	2.2
80	WH 80	19.5	6,000	56.9	0-30	8	13	2.2

- ¹⁾ Wall thickness tolerance of initial material: $\pm 4\%$.
²⁾ Measured diameter variation.
³⁾ According to DIN 6 773. Part 3.



Shaft And Support Rail Units TSWW, TSNW SERIES

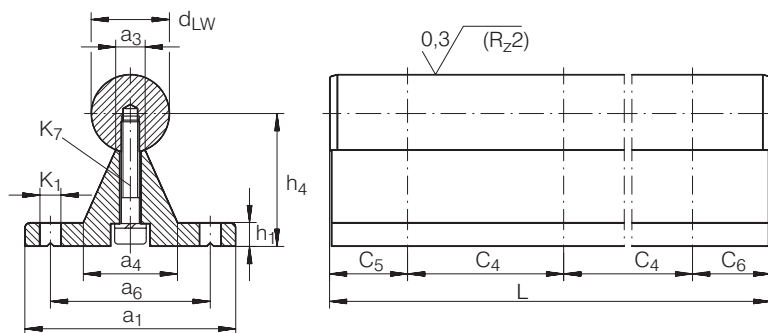

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm														
SHAFT DIAMETER d_{LW} h6	PART NUMBER	MASS kg/m	DIMENSIONS			MOUNTING DIMENSIONS								
			a_1	$h_4^{1)}$	$L^{2)}$	a_3	a_4	a_6	C_4	$C_5/C_6^{3)}$	$C_5/C_6^{3)}$	h_1	$K_1^{4)}$	K_7
				± 0.02	± 3					min.	max.			DIN 6 912
12	TSWW 12	1.67	40	22	6,000	6	19.5	29	120	20	114	5	4.5	M4 × 20
	TSNW 12	1.67	40	22	6,000	5.4	15	29	75	20	69	5	4.5	M4 × 20
	TSWW 16	3.15	54	32	6,000	7.5	24.2	41	150	20	143	6	5.5	M5 × 30
	TSNW 16	2.95	45	26	6,000	7	19	33	100	20	93	5	5.5	M5 × 20
20	TSWW 20	4.03	54	34.02	6,000	7.5	24.2	41	150	20	143	6	5.5	M5 × 30
	TSNW 20	3.95	52	32	6,000	8.1	23	37	100	20	92	6	6.6	M6 × 25
	TSWW 25	5.9	65	39.66	6,000	10	29.8	51	150	20	142	6	6.6	M6 × 35
	TSNW 25	5.6	57	36	6,000	10.3	26	42	120	20	110	6	6.6	M8 × 30
30	TSWW 30	7.58	65	42.19	6,000	10	29.8	51	150	20	142	6	6.6	M6 × 35
	TSNW 30	7.88	69	42	6,000	11	29	51	150	20	139	7	9	M10 × 35
	TSWW 40	14.25	85	60	6,000	17	46	65	150	20	139	10	9	M10 × 50
	TSNW 40	12.83	73	50	6,000	15	36	55	200	20	189	8	9	M10 × 40
50	TSWW 50	19.75	85	65.05	6,000	17	46	65	150	20	139	10	9	M10 × 50
	TSNW 50	19.38	84	60	6,000	19	40	63	200	20	188	9	11	M12 × 45


1) With reference to the nominal shaft diameter. measured while clamped.

2) Maximum length of single piece shaft and support rail units:
Depending on the length of the shaft and support rail unit,
the rail is composed of several individual sections.

3) The dimensions C_5 and C_6 are dependent on the length of the shaft and support rail unit.

4) TSWW: for fixing screws to DIN 912 or DIN 933 (TSWW 12, DIN 6 912)
and spring washer or washer to DIN 7 980 or DIN 125.
TSNW: for fixing screws to DIN 6 912 and spring washer to DIN 7 980.

Shaft And Support Rail Unit TSUW SERIES

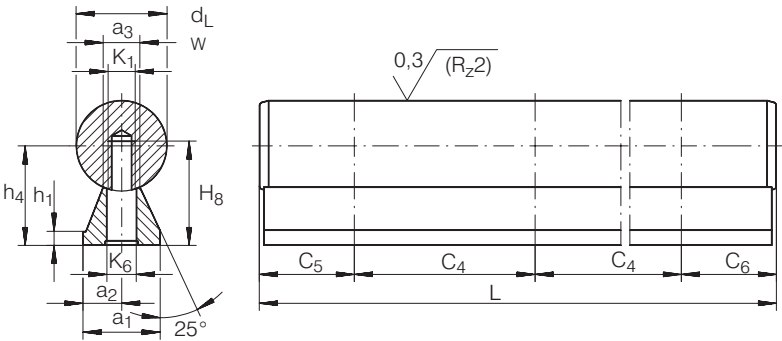

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm														
SHAFT DIAMETER d _{LW}	PART NUMBER	MASS	DIMENSIONS			MOUNTING DIMENSIONS								
			a ₁	h ₄ ¹⁾	L ²⁾	a ₂ ³⁾	a ₃	C ₄	C ₅ /C ₆ ⁴⁾	C ₅ /C ₆ ⁴⁾	h ₁	K ₁	K ₆	H ₈
				± 0.02	± 3				min.	max.				
h6		kg/m												
12	TSUW 12	1.1	11	14.5	6,000	5.5	5.4	75	20	70	3	M4	4.5	16
16	TSUW 16	1.88	14	18	6,000	7	7	75	20	70	3	M5	5.5	19
20	TSUW 20	2.92	17	22	6,000	8.5	8.1	75	20	69	3	M6	6.6	23
25	TSUW 25	4.42	21	26	6,000	10.5	10.3	75	20	68	3	M8	9	28.5
30	TSUW 30	6.22	23	30	6,000	11.5	11	100	20	92	3	M10	11	32
40	TSUW 40	11.03	30	39	6,000	15	15	100	20	91	4	M12	13.5	39.5
50	TSUW 50	16.98	35	46	6,000	17.5	19	100	20	90	5	M14	15.5	46


- 1) With reference to the nominal shaft diameter, measured while clamped.
- 2) Maximum length of single piece shaft and support rail units (TSUW 12: L = 1,600 ± 1.2 mm); Depending on the length of the shaft and support rail unit, the rail is composed of several individual sections.
- 3) Available on request with a₂ ± 0.02.
- 4) The dimensions C₅ and C₆ are dependent on the length of the shaft and support rail unit.



Shaft And Support Rail Units

TSNW..G4 $d \leq 25$ mm,

TSNW..G5 $d > 25$ mm SERIES

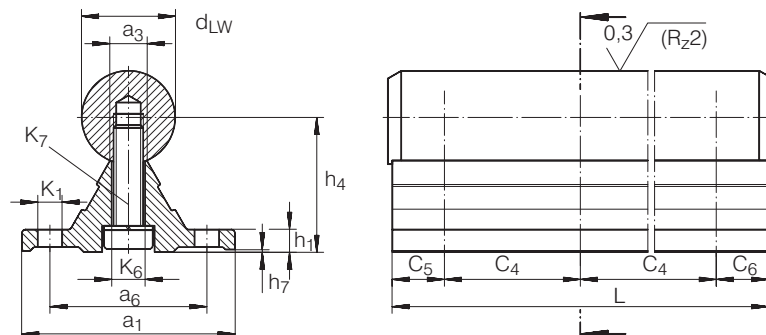

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																
SHAFT DIAMETER d_{LW}	PART NUMBER	MASS kg/m	DIMENSIONS			MOUNTING DIMENSIONS										
			a_1	$h_4^{1)}$	$L^{2)}$	a_3	a_6	C_4	$C_5/C_6^{3)}$	$C_5/C_6^{3)}$	h_1	h_7	$K_1^{4)}$	K_6	K_7	ACCURACY CLASS ⁵⁾
h_6					± 2				min.	max.					DIN 6 912	
12	TSNW 12 G4	1.6	40	22 ± 0.1	4,000	5	29	75	20	69	5	0.2	4.5	4.5	M4 × 18	G4 0.03
16	TSNW 16 G4	2.5	45	26 ± 0.1	4,000	6.8	33	100	20	93	5	0.2	5.5	5.5	M5 × 20	G4 0.03
20	TSNW 20 G4	3.8	52	32 ± 0.1	4,000	7.8	37	100	20	92	6	0.2	6.6	6.6	M6 × 25	G4 0.03
25	TSNW 25 G4	5.3	57	36 ± 0.1	4,000	9.8	42	120	20	110	6	0.3	6.6	9	M8 × 30	G4 0.03
30	TSNW 30 G5	7.5	69	42 ± 0.15	4,000	11	51	150	20	139	7	0.3	9	11	M10 × 35	G5 0.04
40	TSNW 40 G5	12.4	73	50 ± 0.15	4,000	14.5	55	200	20	189	8	0.3	9	11	M10 × 40	G5 0.04
50	TSNW 50 G5	18.9	84	60 ± 0.15	4,000	18.5	63	200	20	188	9	0.3	11	13.5	M12 × 45	G5 0.05

¹⁾ With reference to the nominal shaft diameter, measured while clamped.

²⁾ Maximum length of single piece shaft and support rail units:
the shaft is longer than the support rail by 2.5 mm at each end.

³⁾ The dimensions C_5 and C_6 are dependent on the length of the shaft and support rail unit.

⁴⁾ For fixing screws to DIN 6 912 and spring washer to DIN 7 980.

⁵⁾ Maximum variation of dimension h_4 , measured on the same rail over a distance of 1,000 mm.


Technical drawing of a shaft-hub assembly. The front view (left) shows a shaft of diameter d with a keyway of width $2C_4$ and a fillet radius $0.3 \sqrt{R_z 2}$. The shaft has a total length L and a hub length C_6 . The hub has a width C_5 and a keyway of width C_4 . The side view (right) shows the shaft with a key of width a_3 and a hub of width a_5 . The shaft has a total length a_1 and a hub length a_2 . The key has a height h_1 and a hub has a height h_4 . The keyway has a depth K_1 and a hub has a depth K_5 . The shaft has a diameter d_{LW} and a hub has a diameter d .

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																	
SHAFT DIAMETER d _{LW}	PART NUMBER	MASS	DIMENSIONS			MOUNTING DIMENSIONS											
			a ₁	h ₄ ¹⁾	L ²⁾	a ₂ ¹⁾	a ₃	a ₄	a ₅ ³⁾	C ₄	C ₅ /C ₆ ⁴⁾	C ₅ /C ₆ ⁴⁾	h ₁	h ₆	h ₇	K ₁ ³⁾	K ₅ ³⁾
				± 0.01	± 3	± 0.012						min.	max.				± 0.15
h ₆		kg/m															
20	TSSW 20	4.12	15	52	6,000	7.5	8.1	4	8.5	50	20	42	36.5	30	15	6.6	11
25	TSSW 25	5.98	20	62	6,000	10	10.3	5.5	11	60	20	50	38.5	36	18	9	15
30	TSSW 30	8.68	25	72	6,000	12.5	11	7	13.5	75	20	64	43	42	21	11	18
40	TSSW 40	14.3	30	88	6,000	15	15	8.5	16	100	20	88	53	50	25	13.5	20
50	TSSW 50	21.47	35	105	6,000	17.5	19	9	18.5	100	20	86	64.5	60	30	15.5	24

- 1) With reference to the nominal shaft diameter, measured while clamped.
- 2) Maximum length of single piece shaft and support rail units.
Depending on the length of the shaft and support rail unit, the rail is composed of several individual sections.
- 3) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.
- 4) The dimensions C₅ and C₆ are dependent on the length of the shaft and support rail unit.

Shaft And Support Rail Unit TSWWA SERIES

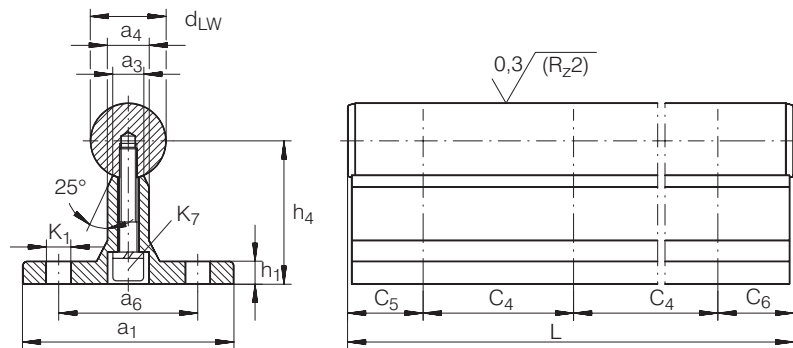


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm													
SHAFT DIAMETER d _{LW}	PART NUMBER	MASS	DIMENSIONS			MOUNTING DIMENSIONS							
			a ₁	h ₄ ¹⁾	L ²⁾	a ₃	a ₄	a ₆	C ₄	C ₅ /C ₆ ³⁾	C ₅ /C ₆ ³⁾	h ₁	K ₁ ⁴⁾
h6		kg/m		± 0.02	± 3					min.	max.		
12	TSWWA 12	1.93	43	28	6,000	5.4	9	29	75	20	69	5	4.5
16	TSWWA 16	2.8	48	30	6,000	7	10	33	100	20	93	5	5.5
20	TSWWA 20	4.12	56	38	6,000	8.1	11	37	100	20	92	6	6.6
25	TSWWA 25	5.83	60	42	6,000	10.3	14	42	120	20	110	6	6.6
30	TSWWA 30	8.5	74	53	6,000	11	14	51	150	20	139	8	9
40	TSWWA 40	13.33	78	60	6,000	15	18	55	200	20	189	8	9
50	TSWWA 50	20.33	90	75	6,000	19	22	63	200	20	188	10	11

- 1) With reference to the nominal shaft diameter, measured while clamped.
- 2) Maximum length of single piece shaft and support rail units.
Depending on the length of the shaft and support rail unit, the rail is composed of several individual sections.
- 3) The dimensions C₅ and C₆ are dependent on the length of the shaft and support rail unit.
- 4) For fixing screws to DIN 912 or DIN 933
and spring washer or washer to DIN 7 980 or DIN 125.



Shaft Support Blocks GWH..B SERIES

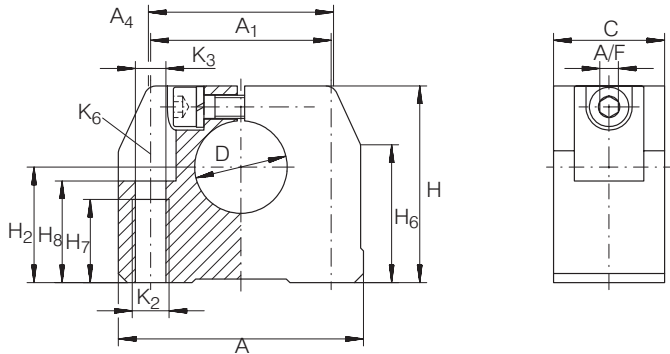


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS									
			D H8	A	C	H	A ₁ ± 0.15	A ₄	H ₂ ± 0.01	H ₆	H ₇	H ₈	K ₂	K ₃ ¹⁾	K ₆ ¹⁾	A/F
6	GWH 06 B	0.03	6	32	16	27	22	25	15	19.5	11	13	M5	4.3	M4	2.5
8	GWH 08 B	0.03	8	32	16	27	22	25	16	19.5	11	13	M5	4.3	M4	2.5
10	GWH 10 B	0.05	10	40	18	33	27	32	18	24	13	16	M6	5.3	M5	3
12	GWH 12 B	0.05	12	40	18	33	27	32	19	24	13	16	M6	5.3	M5	3
14	GWH 14 B	0.07	14	43	20	36.5	32	34	20	25.5	13	18	M6	5.3	M5	3
16	GWH 16 B	0.07	16	43	20	36.5	32	34	22	25.5	13	18	M6	5.3	M5	3
20	GWH 20 B	0.12	20	53	24	42.5	39	40	25	28	18	22	M8	6.6	M6	4
25	GWH 25 B	0.17	25	60	28	52.5	44	44	31	33	22	26	M10	8.4	M8	5
30	GWH 30 B	0.22	30	67	30	60	49	49.5	34	41.5	22	29	M10	8.4	M8	5
40	GWH 40 B	0.48	40	87	40	79.5	66	63	42	44.5	26	38	M12	10.5	M10	6
50	GWH 50 B	0.82	50	103	50	92	80	74	50	61	34	46	M16	13.5	M12	8

In the interim, shaft support blocks GWH..B with profile grooves will still be supplied.
 1) For fixing screws to DIN 912-8.8 and spring washer to DIN 7980.

Shaft Support Blocks

GWN..B SERIES

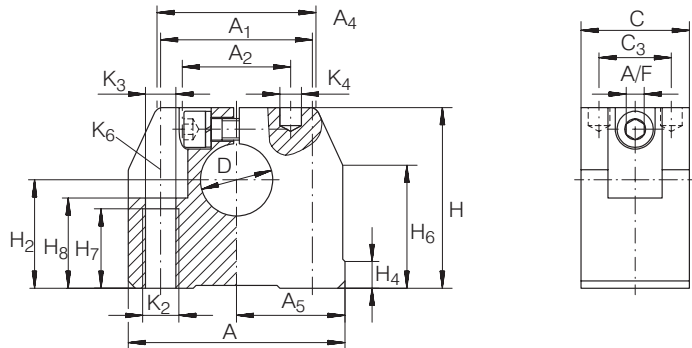


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																					
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS														
			D H8	A	C	H	A ₁	A ₂	A ₄	A ₅ ±0.01	C ₃	H ₂ ±0.01	H ₄	H ₆	H ₇	H ₈	K ₂	K ₃	K ₄	K ₆ ¹⁾	A/F
12	GWN 12 B	0.06	12	43	20	35	30±0.15	20	34	21.5	13	20	5.5	26.5	13	16.5	M6	5.3	4	M5	3
16	GWN 16 B	0.1	16	53	24	42	38±0.15	26	40	26.5	16	25	7	29.5	18	21	M8	6.6	5	M6	4
20	GWN 20 B	0.17	20	60	30	50	42±0.15	30	44	30	20	30	7.5	34	22	25	M10	8.4	6	M8	5
25	GWN 25 B	0.33	25	78	38	60	56±0.15	40	59.5	39	25	35	8.5	41.5	26	30	M12	10.5	8	M10	6
30	GWN 30 B	0.45	30	87	40	70	64±0.15	45	63	43.5	26	40	9.5	46	26	34	M12	10.5	8	M10	6
40	GWN 40 B	0.85	40	108	48	90	82±0.15	65	76	54	32	50	11	57.5	34	44	M16	13.5	10	M12	8
50	GWN 50 B	1.4	50	132	58	105	100±0.2	70	90	66	36	60	11	62	43	49	M20	17.5	12	M16	10

In the interim, shaft support blocks GWN..B with profile grooves will still be supplied.
 1) For fixing screws to DIN 912-8.8 and spring washer to DIN 7980.

Shaft Support Blocks GW, GWA SERIES

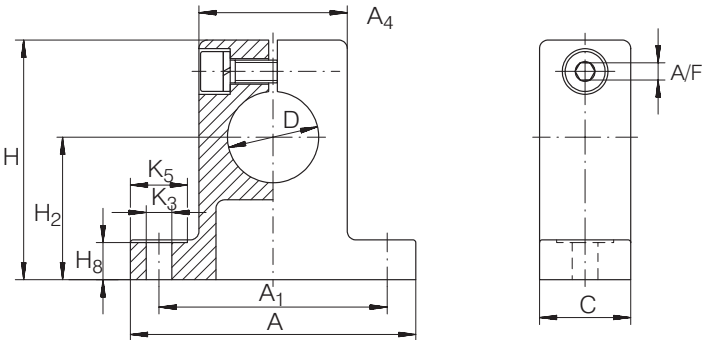

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm													
SHAFT DIAMETER	PART NUMBER	MASS kg	DIMENSIONS				MOUNTING DIMENSIONS						
			D	A	C	H	A ₁	A ₄	H ₂ ± 0.015	H ₈	K ₃ ¹⁾	K ₅ ¹⁾	A/F
10	GW 10	0.03	10	37	11	30	28±0.15	18	17	5	3.4	8	2.5
	GWA 10	0.03	10	37	11	30	28±0.15	18	17	5	4.5	9	2.5
12	GW 12	0.04	12	42	12	35	32±0.15	20	20	5.5	4.5	10	3
	GWA 12	0.04	12	42	12	35	32±0.15	20	20	5.5	5.5	11	3
14	GW 14	0.06	14	46	14	38	36±0.15	23	22	6	4.5	10	3
	GWA 14	0.06	14	46	14	38	36±0.15	23	22	6	5.5	11	3
16	GW 16	0.08	16	50	16	42	40±0.15	26	25	6.5	4.5	10	3
	GWA 16	0.08	16	50	16	42	40±0.15	26	25	6.5	5.5	11	3
20	GW 20	0.15	20	60	20	50	45±0.15	32	30	7.5	4.5	10	3
	GWA 20	0.15	20	60	20	50	45±0.15	32	30	8	5.5	11	3
25	GW 25	0.26	25	74	25	58	60±0.15	38	35	8.5	5.5	11	4
	GWA 25	0.26	25	74	25	58	60±0.15	38	35	9	6.6	13	4
30	GW 30	0.38	30	84	28	68	68±0.2	45	40	9.5	6.6	13	5
	GWA 30	0.38	30	84	28	68	68±0.2	45	40	10	9	18	5
40	GW 40	0.67	40	108	32	86	86±0.2	56	50	12	9	18	6
	GWA 40	0.67	40	108	32	86	86±0.2	56	50	12	11	22	6
50	GW 50	1.38	50	130	40	100	108±0.2	80	60	14	9	18	6
	GWA 50	1.38	50	130	40	100	108±0.2	80	60	14	11	22	6

1) For fixing screws to DIN 912-8.8 and spring washer to DIN 7 980.




Support Rails

TSN..G G4 $d \leq 25$ mm,

TSN..G G5 $d > 25$ mm,

TSN..G4 $d \leq 25$ mm,

TSN..G5 $d > 25$ mm SERIES

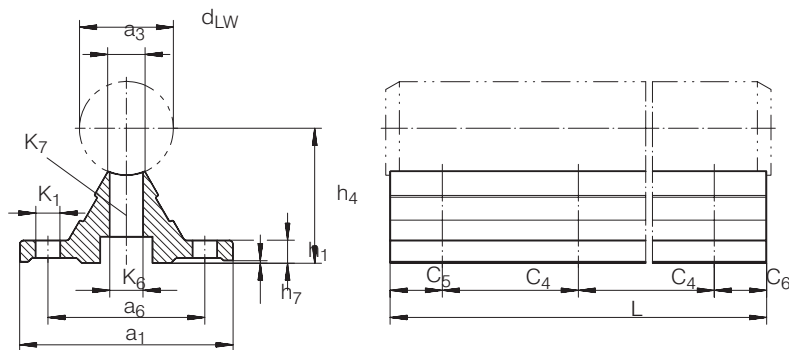

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

DIMENSION TABLE · Dimensions in mm																
SHAFT DIAMETER d _{LW}	PART NUMBER	MASS	DIMENSIONS			MOUNTING DIMENSIONS										
			a ₁	h ₄ ¹⁾	L ²⁾	a ₃	a ₆	C ₄	C ₅ /C ₆ ³⁾		h ₁	h ₇	K ₁ ⁴⁾	K ₆	K ₇	ACCURACY CLASS ⁵⁾
h ₆		kg/m			± 2				min.	max.					DIN 6912	
12	TSN 12 G G4	0.72	40	22±0.1	4,000	5	29	75	20	69	5	0.2	4.5	4.5	M4 × 18	G4 0.03
	TSN 12 G4	0.72	40	22±0.1	4,000	5	—	—	—	—	5	0.2	—	—	M4 × 18	G4 0.03
16	TSN 16 G G4	0.88	45	26±0.1	4,000	6.8	33	100	20	93	5	0.2	5.5	5.5	M5 × 20	G4 0.03
	TSN 16 G4	0.93	45	26±0.1	4,000	6.8	—	—	—	—	5	0.2	—	—	M5 × 20	G4 0.03
20	TSN 20 G G4	1.28	52	32±0.1	4,000	7.8	37	100	20	92	6	0.2	6.6	6.6	M6 × 25	G4 0.03
	TSN 20 G4	1.35	52	32±0.1	4,000	7.8	—	—	—	—	6	0.2	—	—	M6 × 25	G4 0.03
25	TSN 25 G G4	1.43	57	36±0.1	4,000	9.8	42	120	20	110	6	0.3	6.6	9	M8 × 30	G4 0.03
	TSN 25 G4	1.47	57	36±0.1	4,000	9.8	—	—	—	—	6	0.3	—	—	M8 × 30	G4 0.03
30	TSN 30 G G5	1.9	69	42±0.15	4,000	11	51	150	20	119	7	0.3	9	11	M10×35	G5 0.04
	TSN 30 G5	1.99	69	42±0.15	4,000	11	—	—	—	—	7	0.3	—	—	M10×35	G5 0.04
40	TSN 40 G G5	2.53	73	50±0.15	4,000	14.5	55	200	20	189	8	0.3	9	11	M10×40	G5 0.04
	TSN 40 G5	2.6	73	50±0.15	4,000	14.5	—	—	—	—	8	0.3	—	—	M10×40	G5 0.04
50	TSN 50 G G5	3.46	84	60±0.15	4,000	18.5	63	200	20	188	9	0.3	11	13.5	M12×45	G5 0.05
	TSN 50 G5	3.6	84	60±0.15	4,000	18.5	—	—	—	—	9	0.3	—	—	M12×45	G5 0.05

1) With reference to the nominal shaft diameter, measured while clamped.

2) Maximum length of support rail.


3) The dimensions C_5 and C_6 are dependent on the length of the shaft and support rail unit.

4) For fixing screws to DIN 6 912 and spring washer to DIN 7 980.

5) Maximum variation of dimension h_4 , measured on the same rail over a distance of 1,000 mm.

Support Rails

TSN..G SERIES

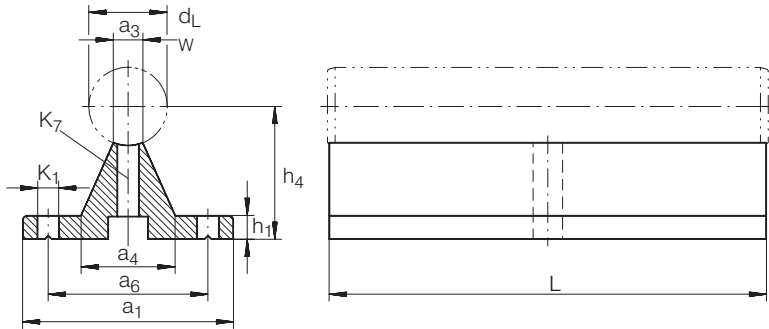

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


DIMENSION TABLE · Dimensions in mm										
SHAFT DIAMETER d_{LW}	PART NUMBER	MASS	DIMENSIONS		MOUNTING DIMENSIONS					
			a_1	$h_4^{1)}$	a_3	a_6	L	h_1	$K_1^{2)}$	K_7
h6		kg								DIN 6 912
12	TSN 1250 G	0.04	40	22 ± 0.02	5.4	29	50	5	4.5	M4 × 20
16	TSN 1660 G	0.07	45	26 ± 0.02	7	33	60	5	5.5	M5 × 20
20	TSN 2070 G	0.1	52	32 ± 0.02	8.1	37	70	6	6.6	M6 × 25
25	TSN 2580 G	0.15	57	36 ± 0.02	10.3	42	80	6	6.6	M8 × 30
30	TSN 3090 G	0.19	69	42 ± 0.02	11	51	90	7	9	M10 × 35
40	TSN 40120 G	0.3	73	50 ± 0.02	15	55	120	8	9	M10 × 40
50	TSN 50150 G	0.6	84	60 ± 0.02	19	63	150	9	11	M12 × 45

1) With reference to the nominal shaft diameter, measured while clamped.
 2) For fixing screws to DIN 6 912 and spring washer to DIN 7 980.



Linear Ball Bearings

KBZ..(PP) SERIES

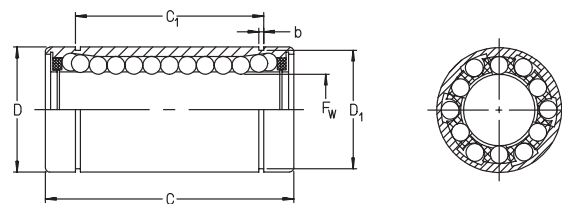

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER ⁵⁷⁶	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	F_w inch	D inch	C inch	D_1 inch	b inch	C_1 inch	NO. BALL ROWS	LOAD RATINGS dyn. lbf.
KBZ 04	PP	1/4	0.02	0.250	0.500	0.750	0.469	0.039	0.511	4	48
KBZ 06	PP	3/8	0.03	0.375	0.625	0.875	0.588	0.039	0.636	4	54
KBZ 08	PP	1/2	0.08	0.500	0.875	1.250	0.821	0.046	0.963	4	158
KBZ 10	PP	5/8	0.17	0.625	1.125	1.500	1.059	0.056	1.104	4	231
KBZ 12	PP	3/4	0.21	0.750	1.250	1.625	1.176	0.056	1.166	5	287
KBZ 16	PP	1	0.66	1.000	1.563	2.250	1.469	0.068	1.755	6	417
KBZ 20	PP	1-1/4	0.97	1.250	2.000	2.625	1.886	0.068	2.005	6	668
KBZ 24	PP	1-1/2	1.48	1.500	2.375	3.000	2.239	0.086	2.412	6	972
KBZ 32	PP	2	2.51	2.000	3.000	4.000	2.838	0.103	3.192	6	1800

The dynamic load rating is based on a travel life expectancy of 2×10^6 inches.

Linear Ball Bearings

KBZ..OP (PP) SERIES

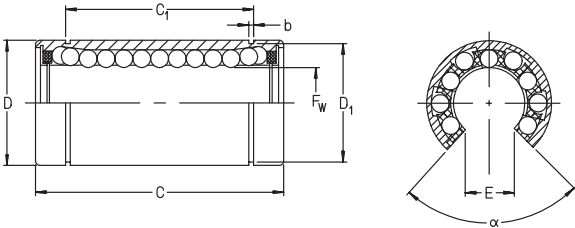

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	F _w Nom. Dim. inch	D Nom. Dim. inch	C Nom. Dim. inch	D ₁ inch	b inch	C ₁ Nom. Dim. inch	E inch	a deg	NO. BALL ROWS	LOAD RATINGS dyn. lbf.
KBZ 08 OP	PP	1/2	0.06	0.500	0.875	1.250	0.821	0.046	0.963	0.313	80	3	158
KBZ 10 OP	PP	5/8	0.13	0.625	1.125	1.500	1.059	0.056	1.104	0.375	80	3	231
KBZ 12 OP	PP	3/4	0.17	0.750	1.250	1.625	1.176	0.056	1.166	0.438	60	4	259
KBZ 16 OP	PP	1	0.37	1.000	1.563	2.250	1.469	0.068	1.755	0.563	50	5	346
KBZ 20 OP	PP	1-1/4	1.26	1.250	2.000	2.625	1.886	0.068	2.005	0.625	50	5	555
KBZ 24 OP	PP	1-1/2	1.26	1.500	2.375	3.000	2.239	0.086	2.412	0.750	50	5	817
KBZ 32 OP	PP	2	2.16	2.000	3.000	4.000	2.838	0.103	3.192	1.000	50	5	1490

The dynamic load rating is based on a travel life expectancy of 2 x 10⁶ inches.



Self Aligning Linear Ball Bearings

KNZ..(PP) SERIES

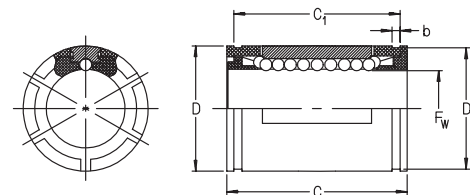

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	F _w inch	D inch	C inch	D ₁ inch	b inch	C ₁ inch	NO. BALL ROWS	LOAD RATINGS dyn. lbf.	LOAD RATINGS stat. lbf.
KNZ 04	PP	1/4	0.008	0.250	0.500	0.750	0.469	0.039	0.515	4	50	30
KNZ 06	PP	3/8	0.013	0.375	0.625	0.875	0.588	0.039	0.703	4	80	40
KNZ 08	PP	1/2	0.042	0.500	0.875	1.250	0.821	0.046	1.032	4	200	110
KNZ 10	PP	5/8	0.101	0.625	1.125	1.500	1.059	0.056	1.112	5	340	190
KNZ 12	PP	3/4	0.123	0.750	1.250	1.625	1.176	0.056	1.272	6	480	270
KNZ 16	PP	1	0.265	1.000	1.563	2.250	1.469	0.068	1.886	6	840	490
KNZ 20	PP	1-1/4	0.485	1.250	2.000	2.625	1.886	0.068	2.011	6	1270	710
KNZ 24	PP	1-1/2	0.750	1.500	2.375	3.000	2.239	0.086	2.422	6	1600	850
KNZ 32	PP	2	1.400	2.000	3.000	4.000	2.838	0.103	3.206	6	2600	1460

The dynamic load rating is based on a travel life expectancy of 2×10^6 inches.

Self Aligning Linear Ball Bearings


KNZ..OP (PP) SERIES

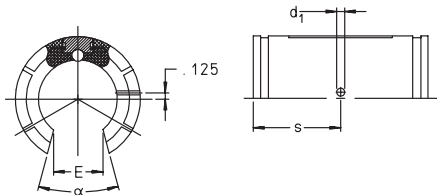

KNZ 08 OP


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	F _w inch	D inch	C inch	D ₁ inch	b inch	C ₁ inch	C ₂ inch	E inch	a deg	d ₁ inch	t inch	s inch	NO. BALL ROWS	LOAD RTGS. dyn. lbf.	LOAD RTGS. stat. lbf.
KNZ 08 OP	PP	1/2	0.033	0.500	0.875	1.250	0.821	0.046	1.032	0.063	0.313	30	0.136	—	0.625	3	200	110
KNZ 10 OP	PP	5/8	0.082	0.625	1.125	1.500	1.059	0.056	1.112	0.125	0.375	30	0.105	0.039	0.125	4	390	230
KNZ 12 OP	PP	3/4	0.101	0.750	1.250	1.625	1.176	0.056	1.272	0.125	0.438	30	0.136	0.059	0.125	5	480	280
KNZ 16 OP	PP	1	0.220	1.000	1.563	2.250	1.469	0.068	1.886	0.125	0.563	30	0.136	0.047	0.125	5	870	500
KNZ 20 OP	PP	1-1/4	0.400	1.250	2.000	2.625	1.886	0.068	2.011	0.188	0.625	30	0.201	0.090	0.188	5	1300	730
KNZ 24 OP	PP	1-1/2	0.620	1.500	2.375	3.000	2.239	0.086	2.422	0.188	0.750	30	0.201	0.090	0.188	5	1630	870
KNZ 32 OP	PP	2	1.158	2.000	3.000	4.000	2.838	0.103	3.206	0.312	1.000	30	0.265	—	0.312	5	2650	1490

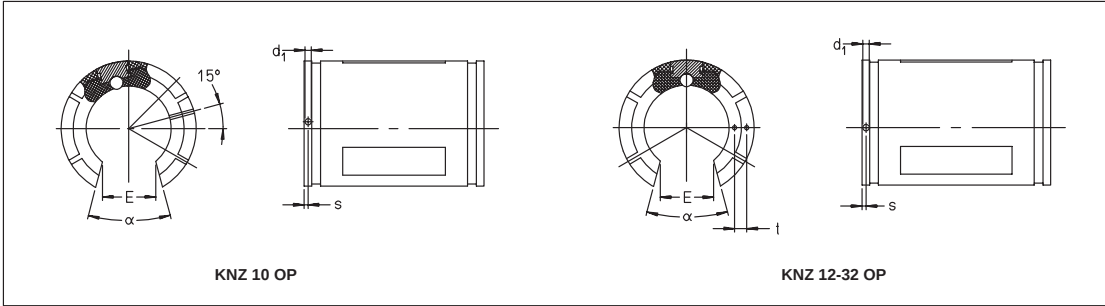

Self Aligning Mounted Units

KGNZ..PP SERIES

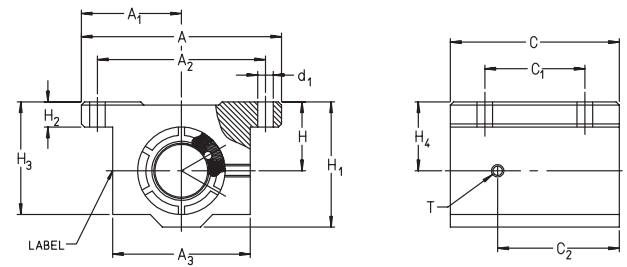

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	d inch	A inch	C inch	A ₁ ±.001 inch	H ±.001 inch	A ₃ inch	H ₁ inch	H ₂ inch
KGNZ 04	PP	1/4	0.1	0.25	1.63	1.188	0.813	0.437	1.000	0.813	0.188
KGNZ 06	PP	3/8	0.14	0.375	1.75	1.313	0.875	0.500	1.125	0.938	0.188
KGNZ 08	PP	1/2	0.29	0.500	2.00	1.688	1.000	0.687	1.375	1.250	0.250
KGNZ 10	PP	5/8	0.53	0.625	2.50	1.938	1.250	0.875	1.750	1.625	0.281
KGNZ 12	PP	3/4	0.64	0.750	2.75	2.063	1.375	0.937	1.875	1.750	0.313
KGNZ 16	PP	1	1.36	1.000	3.25	2.813	1.625	1.187	2.375	2.188	0.375
KGNZ 20	PP	1-1/4	2.86	1.250	4.00	3.625	2.000	1.500	3.000	2.813	0.437
KGNZ 24	PP	1-1/2	4.19	1.500	4.75	4.000	2.375	1.750	3.500	3.250	0.500
KGNZ 32	PP	2	7.92	2.000	6.00	5.000	3.000	2.125	4.500	4.063	0.625

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	H ₃ inch	C ₂ inch	H ₄ inch	T inch	A ₂ ±.01 inch	C ₁ ±.01 inch	d ₁ inch	DYN. LOAD C lbf	STAT. LOAD C ₀ lbf
KGNZ 04	PP	1/4	0.750	0.590	0.437	NIP A1	1.312	0.750	0.156	50	30
KGNZ 06	PP	3/8	0.875	0.660	0.500	NIP A1	1.437	0.875	0.156	80	40
KGNZ 08	PP	1/2	1.125	0.844	0.690	NIP A1	1.688	1.000	0.156	200	110
KGNZ 10	PP	5/8	1.437	1.260	0.700	1/4-28	2.125	1.125	0.188	340	190
KGNZ 12	PP	3/4	1.563	1.340	0.937	1/4-28	2.375	1.250	0.188	480	270
KGNZ 16	PP	1	1.938	1.950	1.187	1/4-28	2.875	1.750	0.218	840	490
KGNZ 20	PP	1-1/4	2.500	2.430	1.500	1/4-28	3.500	2.000	0.218	1270	710
KGNZ 24	PP	1-1/2	2.875	2.750	1.750	1/4-28	4.125	2.500	0.281	1600	850
KGNZ 32	PP	2	3.625	3.420	2.125	1/4-28	5.250	3.250	0.406	2600	1460

Self Aligning Mounted Units

KGNZ..OP PP SERIES

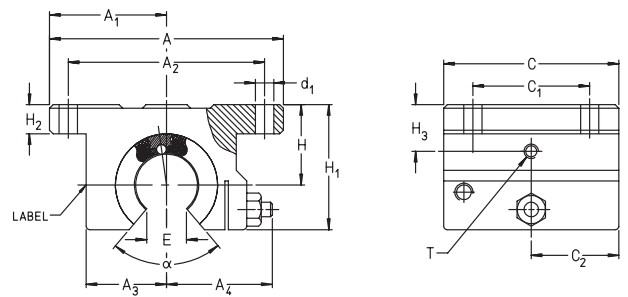



For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	d inch	A inch	C inch	A ₁ ±.001 inch	H ±.001 inch	A ₃ inch	A ₄ inch	H ₁ inch	H ₂ inch
KGNZ OP 08	PP	1/2	0.22	0.500	2.000	1.500	1.000	0.687	0.688	0.905	1.100	0.250
KGNZ OP 10	PP	5/8	0.41	0.625	2.500	1.750	1.250	0.875	0.875	1.095	1.375	0.281
KGNZ OP 12	PP	3/4	0.52	0.750	2.750	1.875	1.375	0.937	0.937	1.161	1.535	0.313
KGNZ OP 16	PP	1	1.17	1.000	3.250	2.625	1.625	1.187	1.188	1.457	1.975	0.375
KGNZ OP 20	PP	1-1/4	2.38	1.250	4.000	3.375	2.000	1.500	1.500	1.831	2.485	0.437
KGNZ OP 24	PP	1-1/2	3.57	1.500	4.750	3.750	2.375	1.750	1.750	2.087	2.910	0.500
KGNZ OP 32	PP	2	6.38	2.000	6.000	4.750	3.000	2.125	2.250	2.638	3.660	0.625

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	H ₃ inch	C ₂ inch	T inch	E inch	α deg	A ₂ ±.01 inch	C ₁ ±.01 inch	d ₁ inch	DYN. LOAD C lbf	STAT. LOAD C ₀ lbf
KGNZ OP 08	PP	1/2	0.370	0.520	NIP A1	0.313	30	1.688	1.00	0.156	200	110
KGNZ OP 10	PP	5/8	0.450	0.875	1/4-28	0.375	30	2.125	1.13	0.188	390	230
KGNZ OP 12	PP	3/4	0.510	0.937	1/4-28	0.438	30	2.375	1.25	0.188	480	280
KGNZ OP 16	PP	1	0.730	1.312	1/4-28	0.563	30	2.875	1.75	0.218	870	500
KGNZ OP 20	PP	1-1/4	0.800	1.688	1/4-28	0.625	30	3.500	2.00	0.218	1300	730
KGNZ OP 24	PP	1-1/2	0.840	1.875	1/4-28	0.750	30	4.125	2.50	0.281	1630	870
KGNZ OP 32	PP	2	1.100	2.375	1/4-28	1.000	30	5.250	3.25	0.406	2650	1490

Self Aligning Tandem Mounted Units KTNZ..PP SERIES

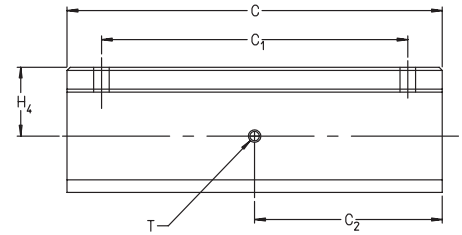



For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.

For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	d inch	A inch	C inch	A ₁ ±.001 inch	H ±.001 inch	A ₃ inch	H ₁ inch	H ₂ inch
KTNZ 04	PP	1/4	0.21	0.250	1.63	2.50	0.813	0.437	1.000	0.813	0.188
KTNZ 06	PP	3/8	0.27	0.375	1.75	2.75	0.875	0.500	1.125	0.938	0.188
KTNZ 08	PP	1/2	0.51	0.500	2.00	3.50	1.000	0.687	1.375	1.250	0.250
KTNZ 10	PP	5/8	0.97	0.625	2.50	4.00	1.250	0.875	1.750	1.625	0.281
KTNZ 12	PP	3/4	1.25	0.750	2.75	4.50	1.375	0.937	1.875	1.750	0.313
KTNZ 16	PP	1	2.58	1.000	3.25	6.00	1.625	1.187	2.375	2.188	0.375
KTNZ 20	PP	1-1/4	4.94	1.250	4.00	7.50	2.000	1.500	3.000	2.813	0.437
KTNZ 24	PP	1-1/2	7.73	1.500	4.75	9.00	2.375	1.750	3.500	3.250	0.500

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	H ₃ inch	C ₂ inch	H ₄ inch	T inch	A ₂ ±.01 inch	C ₁ ±.01 inch	d ₁ inch	DYN. LOAD C lbf	STAT. LOAD C ₀ lbf
KTNZ 04	PP	1/4	0.750	1.250	0.437	NIP A1	1.312	2.000	0.156	80	60
KTNZ 06	PP	3/8	0.875	1.375	0.500	NIP A1	1.437	2.250	0.156	130	80
KTNZ 08	PP	1/2	1.125	1.750	0.687	NIP A1	1.688	2.500	0.156	320	220
KTNZ 10	PP	5/8	1.437	2.000	0.875	1/4-28	2.125	3.000	0.188	550	380
KTNZ 12	PP	3/4	1.563	2.250	0.937	1/4-28	2.375	3.500	0.188	780	540
KTNZ 16	PP	1	1.938	3.000	1.187	1/4-28	2.875	4.500	0.218	1360	980
KTNZ 20	PP	1-1/4	2.500	3.750	1.500	1/4-28	3.500	5.500	0.218	2060	1420
KTNZ 24	PP	1-1/2	2.875	4.500	1.750	1/4-28	4.125	6.500	0.281	2600	1700

Self Aligning Tandem Mounted Units KTNZ..OP PP SERIES

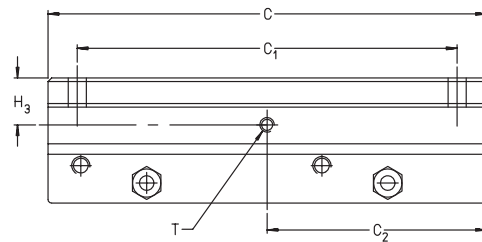

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.



For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	WGT. lbs.	d inch	A inch	C inch	A ₁ ±.001 inch	H ±.001 inch	A ₃ inch	A ₄ inch	H ₁ inch	H ₂ inch
KTNZ 08 OP	PP	1/2	0.49	0.500	2.000	3.50	1.000	0.687	0.688	0.905	1.100	0.250
KTNZ 10 OP	PP	5/8	0.90	0.625	2.500	4.00	1.250	0.875	0.875	1.095	1.375	0.281
KTNZ 12 OP	PP	3/4	1.15	0.750	2.750	4.50	1.375	0.937	0.937	1.161	1.535	0.313
KTNZ 16 OP	PP	1	2.38	1.000	3.250	6.00	1.625	1.187	1.188	1.457	1.975	0.375
KTNZ 20 OP	PP	1-1/4	4.61	1.250	4.000	7.50	2.000	1.500	1.500	1.831	2.485	0.437
KTNZ 24 OP	PP	1-1/2	7.28	1.500	4.750	9.00	2.375	1.750	1.750	2.087	2.910	0.500

PART NUMBER	SEAL SUFFIX	SHAFT DIA. inch	H ₃ inch	C ₂ inch	T inch	E inch	∞ deg	A ₂ ±.01 inch	C ₁ ±.01 inch	d ₁ inch	DYN. LOAD C lbf	STAT. LOAD C ₀ lbf
KTNZ 08 OP	PP	1/2	0.370	1.75	NIP A1	0.313	30	1.688	2.50	0.156	320	220
KTNZ 10 OP	PP	5/8	0.450	2.00	1/4-28	0.375	30	2.125	3.00	0.188	630	460
KTNZ 12 OP	PP	3/4	0.510	2.25	1/4-28	0.438	30	2.375	3.50	0.188	780	560
KTNZ 16 OP	PP	1	0.730	3.00	1/4-28	0.563	30	2.875	4.50	0.218	1410	1000
KTNZ 20 OP	PP	1-1/4	0.800	3.75	1/4-28	0.625	30	3.500	5.50	0.218	2110	1460
KTNZ 24 OP	PP	1-1/2	0.800	4.50	1/4-28	0.750	30	4.125	6.50	0.281	2650	1740

Precision Ground Shafts

WZ, WZ..X46CR13 SERIES

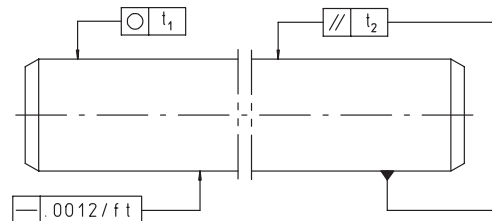

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER STANDARD "L" CLASS	PART NUMBER STANDARD "S" CLASS	PART NUMBER STAINLESS STEEL	SHAFT DIA. nom inch	ROUNDNESS t ₁ inch	TAPER t ₂ ¹⁾ inch	HARDNESS DEPTH min inch	SURFACE FINISHING max
WZ1/4"L	WZ1/4"S	—	1/4	0.0002	0.0002	0.016	RMS 12
WZ3/8"L	WZ3/8"S	WZ3/8"X46CR13L	3/8	0.0002	0.0002	0.016	RMS 12
WZ1/2"L	WZ1/2"S	WZ1/2"X46CR13L	1/2	0.0002	0.0002	0.024	RMS 12
WZ5/8"L	WZ5/8"S	WZ5/8"X46CR13L	5/8	0.0002	0.0003	0.024	RMS 12
WZ3/4"L	WZ3/4"S	WZ3/4"X46CR13L	3/4	0.0002	0.0004	0.035	RMS 12
WZ1"L	WZ1"S	WZ1"X46CR13L	1	0.0002	0.0004	0.035	RMS 12
WZ1-1/8"L	—	—	1-1/8	0.0002	0.0004	0.035	RMS 12
WZ1-1/4"L	WZ1-1/4"S	—	1-1/4	0.0002	0.0004	0.059	RMS 12
WZ1-1/2"L	WZ1-1/2"S	WZ1-1/2"X46CR13L	1-1/2	0.0002	0.0004	0.059	RMS 12
WZ2"L	WZ2"S	—	2	0.0003	0.0004	0.087	RMS 12

1) Measurement of diameter difference

Precision Ground Shafts


WZ..PDT, WZ..X46CR13 PDT SERIES

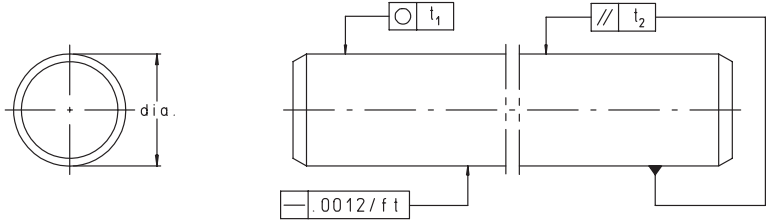


For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER STANDARD	PART NUMBER STAINLESS STEEL	SHAFT DIA. nom inch	HOLE SPACING X	THREAD SIZE d
WZ1/2" PDT	WZ1/2" X46CR13PDT	1/2	4	6-32
WZ5/8" PDT	—	5/8	4	8-32
WZ3/4" PDT	WZ0-3/4" X46CR13PDT	3/4	6	10-32
WZ1" PDT	WZ1-0/0" X46CR13PDT	1	6	1/4-20
WZ1-1/4" PDT	—	1-1/4	6	5/16-18
WZ1-1/2" PDT	WZ1-1/2" X46CR13PDT	1-1/2	8	3/8-16
WZ2" PDT	—	2	8	1/2-13

Please specify distance from shaft end to first hole with order

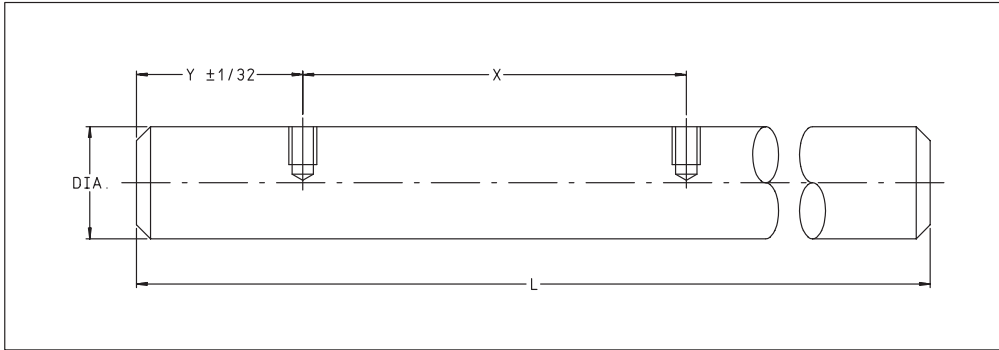

Shaft Support Rails TSWZ SERIES

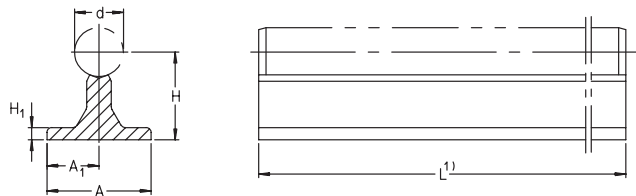

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


PART NUMBER	SHAFT DIA. inch	WGT. lbsft	A inch	H 2) ± .002 inch	H ₁ inch	A ₁ 3) ± .002 inch
TSWZ 08	1/2	0.60	1.50	1.125	0.188	0.750
TSWZ 10	5/8	0.78	1.63	1.125	0.250	0.813
TSWZ 12	3/4	1.01	1.75	1.500	0.250	0.875
TSWZ 16	1	1.37	2.13	1.750	0.250	1.063
TSWZ 20	1-1/4	1.98	2.50	2.125	0.313	1.250
TSWZ 24	1-1/2	3.03	3.00	2.500	0.375	1.500
TSWZ 32	2	4.80	3.75	3.250	0.500	1.875

1) Maximum length L = 48 inches
 2) With reference to the nominal shaft diameter, measured while clamped.



Shaft Support Rails

TSWZ..PD SERIES

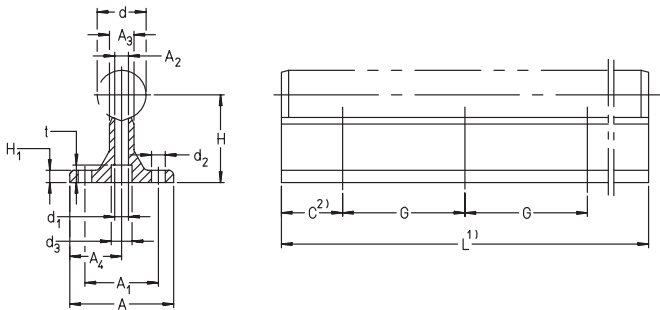

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.


PART NUMBER	SHAFT DIA. inch	WGT. lbs.	A inch	H ³⁾ inch	H ₁ inch	A ₂ inch	A ₃ inch	A ₁ inch	d ₃ inch	t inch	d ₁ inch	d ₂ inch	A ₄ inch	G inch
TSWZ 08 PD	1/2	0.60	1.50	1.125	0.188	0.208	0.250	0.750	0.281	0.150	0.169	0.169	1.000	4
TSWZ 10 PD	5/8	0.78	1.63	1.125	0.250	0.251	0.313	0.813	0.312	0.180	0.193	0.193	1.125	4
TSWZ 12 PD	3/4	1.01	1.75	1.500	0.250	0.294	0.375	0.875	0.375	0.220	0.221	0.221	1.250	6
TSWZ 16 PD	1	1.37	2.13	1.750	0.250	0.379	0.500	1.063	0.437	0.272	0.281	0.281	1.500	6
TSWZ 20 PD	1-1/4	1.98	2.50	2.125	0.313	0.465	0.563	1.250	0.531	0.325	0.343	0.343	1.875	6
TSWZ 24 PD	1-1/2	3.03	3.00	2.500	0.375	0.550	0.688	1.500	0.625	0.390	0.406	0.343	2.250	8
TSWZ 32 PD	2	4.80	3.75	3.250	0.500	0.721	0.875	1.875	0.812	0.540	0.531	0.406	2.750	8

- 1) Maximum length L = 48 inches
- 2) The dimension C is dependent on the length of the support rail. It should always be equal at both ends.
- 3) With reference to the nominal shaft diameter, measured while clamped.



Shaft Support Rails

TSUZ SERIES

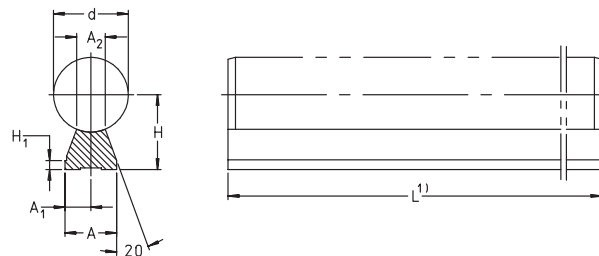

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.


For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SHAFT DIA. inch	WGT. lbsft	d inch	A inch	H ²⁾ ± .002 inch	H ₁ inch	A ₁ ³⁾ ± .002 inch	A ₂ inch
TSUZ 08	1/2	0.11	0.50	0.37	0.562	0.120	0.185	0.216
TSUZ 10	5/8	0.17	0.63	0.45	0.687	0.120	0.225	0.269
TSUZ 12	3/4	0.20	0.75	0.51	0.750	0.120	0.225	0.317
TSUZ 16	1	0.35	1.00	0.69	1.000	0.120	0.345	0.422
TSUZ 20	1-1/4	0.44	1.25	0.78	1.187	0.200	0.390	0.523
TSUZ 24	1-1/2	0.58	1.50	0.93	1.375	0.200	0.465	0.625
TSUZ 32	2	0.89	2.00	1.18	1.750	0.250	0.590	0.824

1) Maximum length L = 48 inches.

2) With reference to the nominal shaft diameter, measured while clamped.

Shaft Support Rails TSUZ..PD SERIES

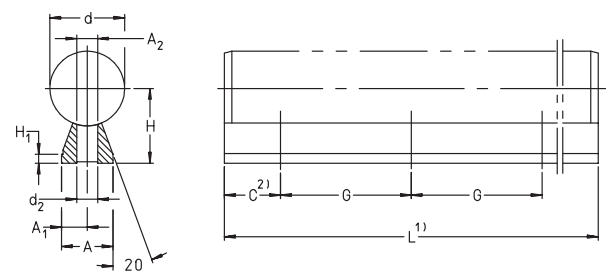

For details on part numbers, descriptive suffixes and various technical references, please refer to front of this section.
 For engineering or technical information contact your local sales representative or call Distributor Sales (800)523-6572 or Linear Sales (800)462-3399.

PART NUMBER	SHAFT DIA. inch	WGT. lbs/ft	d inch	A inch	H ₃ inch	H ₁ inch	A ₁ ⁴⁾ inch	A ₂ inch	d ₂ inch	G inch
TSUZ 08 PD	1/2	0.11	0.50	0.37	0.562	0.120	0.185	0.216	0.169	4
TSUZ 10 PD	5/8	0.17	0.63	0.45	0.687	0.120	0.225	0.269	0.193	4
TSUZ 12 PD	3/4	0.20	0.75	0.51	0.750	0.120	0.255	0.317	0.221	6
TSUZ 16 PD	1	0.35	1.00	0.69	1.000	0.120	0.345	0.422	0.281	6
TSUZ 20 PD	1-1/4	0.44	1.25	0.78	1.187	0.200	0.390	0.523	0.343	6
TSUZ 24 PD	1-1/2	0.58	1.50	0.93	1.375	0.200	0.465	0.623	0.406	8
TSUZ 32 PD	2	0.89	2.00	1.18	1.750	0.250	0.590	0.824	0.531	8

- 1) Maximum length L = 48 inches.
- 2) The dimension C is dependent on the length of the support rail. It should always be equal at both ends.
- 3) With reference to the nominal shaft diameter, measured while clamped.



INA SALES OFFICES

MANUFACTURING PLANTS

SALES OFFICES

TORONTO, CANADA

INA Canada Inc.
2871 Plymouth Drive
Oakville, Ontario L6H 5S5
Toll Free: 1-800-263-4397
Telephone: 905-829-2750
Fax: 905-829-2563

MONTREAL

INA Canada Inc.
489 Lepine St.
Dorval, QC H9P 2V6
Toll Free: 1-800-361-7015

VANCOUVER

INA Canada Inc.
1115 Cliveden Ave.
Delta, BC V3M 6G9
Toll Free: 1-800-663-9006

EDMONTON

INA Canada Inc.
3132 Parsons Road NW, Suite 215
Edmonton, AB T6N 1L6
Telephone: 780-989-3650
Fax: 780-989-3651
Toll Free: 1-800-663-9006

MEXICO CITY, MEXICO

INA Mexico, S.A. de C.V
Paseo de la Reforma 383, Int. 704
Col. Cuauhtemoc 06500
Mexico, D.F.
Telephone: 525-525-00-12 / 01-84
Fax: 525-525-01-94

OTHER COUNTRIES

Argentina	Italy
Australia	Japan
Austria	Korea
Belgium	Netherlands
Brazil	Norway
Denmark	Portugal
Finland	South Africa
France	Spain
Germany	Sweden
Great Britain	Turkey

MANUFACTURING PLANTS

PARENT COMPANY

INA-Schaeffler KG
Industriestrasse 1-3
D-91074 Herzogenaurach
Germany
Telephone: (49132) 82-0
Fax: (49132) 82 49 33

UNITED STATES

Plant I
INA USA Corporation
One INA Drive
P.O. Box 390
Cheraw, South Carolina 29520
Telephone: 843-537-9341/9346
Fax: 843-537-8751

Plant II
INA USA Corporation
Highway 9 West
P.O. Box 390
Cheraw, South Carolina 29520
Telephone: 843-537-9341
Fax 843-537-8752

Plant III
INA USA Corporation
308 Springhill Farm Road
Fort Mill, South Carolina 29715
Telephone: 803-547-7990
Fax: 803-548-8597

Plant IV
INA USA Corporation
New Cut Road, P.O. Box 570
Spartanburg, South Carolina 29304
Telephone: 864-583-4541
Fax: 864-591-8890

Plant V
INA USA Corporation
200 Evans Row
Cheraw, South Carolina 29520
Telephone: 843-537-9341
Fax: 843-537-8751

OTHER COUNTRIES

Australia	Great Britain
Brazil	Italy
Canada	Korea
China	Slovakia
France	Spain
Germany	Switzerland

USA SALES OFFICES

Corporate Offices

INA USA CORPORATION
308 Springhill Farm Road
Fort Mill, South Carolina 29715
Telephone: 803-548-8500 Fax: 803-548-8599

ATLANTA

207 N. Lewis Avenue, Suite G
LaGrange, GA 30240
Telephone: 706-883-7305
Fax: 706-883-7315

CHARLOTTE

377 Carowinds Boulevard, Suite 120
Fort Mill, South Carolina 29708
Telephone: 803-547-7970
Fax: 803-548-6361

CHICAGO

2525 Cabot Drive, Suite 202
Lisle, Illinois 60532
Telephone: 630-955-9360
Fax: 630-955-9365

CLEVELAND

12306 Woodward Boulevard
Garfield Heights, Ohio 44125
Telephone: 216-587-4393
Fax: 216-587-2655

DALLAS

3939 Belt Line Road, Suite 365
Addison, Texas 75001
Telephone: 972-488-2544
Fax: 972-488-2802

DAYTON

261 Regency Ridge Drive
Centerville, Ohio 45459
Telephone: 937-433-6404
Fax: 937-433-6814

DETROIT

335 East Big Beaver Road, Suite 101
Troy, Michigan 48083
Telephone: 248-619-2102
Fax: 248-528-5100

HOUSTON

10101 Southwest Freeway, Suite 400
Houston, Texas 77074
Telephone: 713-219-1430
Fax: 713-219-1431

KANSAS CITY

14425 College Blvd., Suite 110
Lenexa, Kansas 66215
Telephone: 913-451-0300
Fax: 913-451-0302

LOS ANGELES

34700 Pacific Coast Highway, Suite 203
Capistrano, California 92624
Telephone: 949-234-9799
Fax: 949-234-9899

LOUISVILLE

14419 Micawber Way
Louisville, Kentucky 40245
Telephone: 502-254-9590
Fax: 502-254-2760

MEMPHIS

1922 Exeter Road, Suite 20
Germantown, Tennessee 38138
Telephone: 901-756-0023
Fax: 901-756-0260

MILWAUKEE

N16 W23233 Stoneridge Drive, Suite 220
Waukesha, Wisconsin 53188
Telephone: 262-544-8270
Fax: 262-544-8271

MINNEAPOLIS

80 W. 78th Street, Suite 270C
Chanhassen, Minnesota 55317
Telephone: 952-934-8822
Fax: 952-934-8833

PHILADELPHIA

3000 Cabot Blvd. West, Suite 220
Langhorne, PA 19047
Telephone: 215-891-8500
Fax: 215-891-0554

PHOENIX

6619 N. Scottsdale Road, Suite 5
Scottsdale, Arizona 85250
Telephone: 480-296-2060
Fax: 480-596-5745

QUAD CITIES

300 NW Banktower, 2550 Middle Road
Bettendorf, Iowa 52722
Telephone: 319-355-0383
Fax: 319-355-1937

SEATTLE

40 Lake Bellevue, Suite 100
Bellevue, Washington 98005
Telephone: 425-646-9477
Fax: 425-646-9471